

# HAM RADIO OUTLET®

COMMUNICATIONS EQUIPMENT CATALOG  
FALL/WINTER 2018

WORLDWIDE DISTRIBUTION

**YAESU** CONTINUING THE MP LEGACY  
OF TECHNOLOGY & PERFORMANCE

## FTDX101MP

200 Watts, SDR Technology & Waterfall Display



## FTDX5000MP

200 Watts, EL Display, Dual Receivers & 32Bit DSP



Order online: [www.hamradio.com](http://www.hamradio.com) | Ham Radio Outlet App available at:



ANAHEIM, CA: 800-854-6046 | ATLANTA, GA: 800-444-7927 | BURBANK, CA: 877-892-1748 | DENVER, CO: 800-444-9476 | MILWAUKEE, WI: 800-558-0411  
NEW CASTLE, DE: 800-644-4476 | OAKLAND, CA: 877-892-1745 | PHOENIX, AZ: 800-559-7388 | PLANO, TX: 877-455-8750 | PORTLAND, OR: 800-765-4267  
SALEM, NH: 800-444-0047 | SAN DIEGO, CA: 877-520-9623 | WOODBRIDGE, VA: 800-444-4799



# ALINCO

# DM-430T

RoHS



Digital Switching Power Supply

## Ultra-compact, lightweight and high-powered switching power supply with Power Poles !

DM-430 features include a large illuminated digital Volt/Amp meter, rear panel binding posts/front panel Anderson Power Poles (30A peak), voltage adjust (5-15V) or fixed at 13.8V, ripple less than 80mVp-p and protection for short-circuit, over temperature, and current limiting!

### Voltage Control

The output voltage is continuously adjustable from 5 to 15 Volt DC, or fixed at rated 13.8V.

### DM-430T



### Forced Air Cooling

Designed with reliability in mind, a durable cooling fan keeps DM-430 running continuously under heavy loads.

### Large Binding Posts

The main output terminals are large enough to provide an efficient power transfer to your equipment.

### Volt & Amp Meter

A highly visible, accurate digital Volt / Amp meter allows real-time monitoring of the output current.

### Auxiliary Output Terminals (30A max.)

Added front panel Anderson Power Pole® terminals provides versatility and quick connections.



## SPECIFICATIONS

Input Voltage	120VAC (DM-430T) 230VAC (DM-430E)
Output voltage	5-15V DC
Output current	30A (max)
Output voltage regulation	Less than 2%
Ripple voltage	Less than 80mVp-p at rated load
Protection	Short-circuit , Automatic current limiting over 30A Over-temperature
Fuse	8A (DM-430T) / 5A(DM-430E)
Dimensions WxHxD (Projections not included)	125(W) x 60(H) x 160(D) mm 4.921(w) x 2.362(H) x 6.299(D) inches
Weight	Approx. 1.6kg / 3.53 lb with AC cord

Anderson Powerpole is a registered trademark of Anderson Power Products, Inc.

**Caution**

Please be sure to read the instruction manual before using the product for your safety.



## Base Transceivers



### All-Mode TRANSCEIVER Analog / Digital Hybrid

**DX-SR9T** – \$Call

**150 kHz - 30 MHz**

This hybrid, stand-alone analog and digital SDR transceiver covers all shortwave and HF amateur bands allocated to North America. Covers 160 m to 10 m amateur bands including 5.3 MHz in SSB, CW, AM, FM and IQ output modes. Output power is 100 W SSB/ CW and FM, 40 W in AM with low and super-low power settings for QRP operation. In addition, the general coverage receiver covers 135 KHz to 30 MHz in all modes.

- Front panel separation.
- Large LCD display.
- Front facing speaker.
- Auto-keyer.
- Simple operating commands.
- Download free SDR software from Alinco.com. Programming cable ERW-4C or ERW-7 required for SDR operation.



**SSB / CW / AM / FM**

### All Mode TRANSCEIVER

**DX-SR8T** – \$Call

**150 kHz - 30 MHz**

The DX-SR8T covers 160 m to 10 m amateur bands including 5.3 MHz in SSB, CW, AM and FM modes. Output power is 100 W SSB / CW / FM and 40 W in AM with low and super-low power settings for QRP operation. General coverage receiver of all modes 135 kHz to 30 MHz. Receiver features are similar to the DX-R8T.

**Extended  
Warranties  
Available.  
See page 54.**

## Desktop Receiver



### All Mode RECEIVER

**DX-R8T** – \$Call

**150 kHz - 30 MHz  
SSB / CW / AM / FM / IQ**

Monitor SWL signals from aviation, navigation and data sources.

- IQ signal output allows use of third-party SDR software.
- Front and rear jacks.
- Direct frequency input to the dual VFO system.
- Detachable front control panel mounting options.
- Large LCD display.
- Front speaker and 2 W audio output.
- Rugged die cast chassis.
- Narrow ceramic filters (AM 2.4 kHz, SSB 1 kHz) and 0.5 kHz audio filtering for CW.
- 4-level RF amp / attenuator.
- IF shift and RIT.
- Noise blanker.
- 3 banks / 600 memory channels.
- Two sets of programmed search pairs and varieties of scanning modes.
- Auto power off, sleep timer, dial and key locks, RX indicator illumination.
- Computer utility software to manage settings and edit memories.
- Receive circuitry: Double conversion superheterodyne.
- Receiver current drain: 1.0 A.
- RIT range:  $\pm 1.2$  kHz.
- IF Frequency: 1st 71.75 MHz, 2nd 455 kHz.
- Spurious and image rejection ratio: more than 70 dB.
- Antenna impedance: 50 ohm unbalanced.
- Frequency stability:  $\pm 1$  ppm.
- Power required: 13.8 VDC  $\pm 15\%$ .

### EDS-17

Front panel remote kit optional. 5 m cable, front panel bracket, unit cover and hardware.

## Handheld Receiver

### Wide Band Receiver

**DJ-X11T**

**\$Call – HRO Price**

Get the power of a desktop receiver in a handheld!! Features: 2 VFO simultaneous receive; covers 0.05 to 1299.995 MHz\* in all modes; 1200 memories; sub-band coverage VHF 118-171 MHz and 336 to 470 MHz in AM / NFM; IQ signal can be used with 3rd party software and discriminator output; easy-to-use twin dials; selectable tuning steps; 3 selectable scan speeds; firmware to operate as a software defined radio.

\*Cell band blocked.



## Amateur Radios 3-23

### Scanners SWL & SDR 24-27

### Digital / Packet Radio Control 28-34

### Audio & Mics 34-39

### Analyzers Meters & Clocks 40-45

### Keys & Radio Mounts 46-49

### Books & Software 50-54

### Amplifiers 71-73

### Power Supplies Batteries / Accessories 74-79

### Coax & Connectors 79-81

### Antenna Tuners Switches 82-89

### Amateur Antennas 90-112

### Rotators & Towers 112-118

### Store Locations 120-121

### Complete Index 122

© 2018 Ham Radio Outlet, Asterisk Design and Keydance Productions. This catalog may not be reproduced in whole or in part without permission.

## Single Band Mobiles

### Dual Band Mobile



#### Dual Band 2 m / 70 cm

**DR-735T** - \$Call

- 144 MHz / 440 MHz FM transceiver.
- TX 144-148 MHz / 430-450 MHz.
- RX 108-174 MHz (AM / FM) 400-480 MHz (FM).
- Receiver double conversion.
- Civil aviation and utility receive.
- 1000 channel programmable memory.
- Full duplex / X-band repeat.
- 50 / 20 / 5 W power output on both bands.
- Huge alphanumeric LCD display.
- RGB backlight with choice of eight colors.
- Set different display color for different functions and store in memory.
- Independent 2 meter / 70 cm dials / volume / squelch knobs.
- Removable front control head. Mount remotely or inverted for optimal speaker placement.
- Wide variety of scanning features.
- Computer programmable. Software available on line.



**Extended Warranties  
Available**



#### DR-B185HT

#### 2 Meters / 85 Watts

\$Call - HRO Price

The compact DR-B185 is loaded with high tech features: high stability PLL synthesizer, 85 W max output, 7-digit alphanumeric display, and

a wide variety of scanning features. Yet the operation is intuitive and simple.

- TX 144-147.995 MHz; RX 136-173.995 MHz.
- Scanning functions include DCS / CTCSS / priority / group and timer / busy modes.
- Wide and narrow FM modes
- 39 tone CTCSS / DCS / 2-tone encode and decode.
- High / low power setting.
- Offset direction and frequency variable.
- Keypad lockout / reverse function.
- Alphanumeric tag / display dimmer.
- Automatic illumination brightness.
- Time out timer.
- BCLO and auto power off.
- Tone-burst tones / auto-dialer.
- DTMF TX speed, pause and monitoring features.
- S-METER squelch.
- Multifunctional microphone with keypads.
- Cable cloning.



#### DR-135TMKIII - 2 Meter

#### DR-435TMKIII - 440 MHz

#### DR-235TMKIII - 220 MHz

\$Call - HRO Prices

Features a unique multifunction backlit microphone with direct frequency input. The 144 MHz, 220 MHz, and 440 MHz models accept optional EJ-41U internal TNC or EJ-47U digital voice module. The MKIII TCXO supports a specification of  $\pm 2.5$  ppm frequency stability.



#### DR-06T 6 Meters

\$Call - HRO Prices

Catch the exciting world of the 6 m band with the DR-06T. Covering 50-53.995 MHz with an output of 50 W, it has convenient scan features, a variety of selective calling tones, theft alarm, ignition key on/off, direct frequency input, and controls from the EMS57 key pad microphone.



#### DR-135TMKIII - 2 Meters

\$Call - HRO Price

2 meter FM and Airband receive (AM). Ignition key power control, theft alarm, 7 place alphanumeric display, front panel data input, optional internal packet module to use with APRS®, rear panel serial port connection. 100 memories, 10 autodial memories.

### Alinco Mobile Specifications

Model	Primary Use	Frequency Range	Power	Current Drain Xmit	Current Drain Rec	Power Out	Memory Channels	Ant Z ohms	Mike Z ohms	Sensitivity at 12 dB	Height in	Width in	Depth in	Weight lbs
DR-135TMKIII#	Mobile	2 m	13.8 VDC	11 A	400 mA	5/10/50 W	100	50	600	<16 $\mu$ V	1.57	5.58	6.83	2.2
DR-235TMKIII#	Mobile	222-225 MHz	13.8 VDC	8 A	400 mA	5/10/25 W	100	50	600	<16 $\mu$ V	1.57	5.58	6.83	2.2
DR-435TMKIII#	Mobile	430-450 MHz	13.8 VDC	10 A	400 mA	5/10/35 W	100	50	600	<16 $\mu$ V	1.57	5.58	6.83	2.2
DR-06T	Mobile	50-53.995 MHz	13.8 VDC	11 A	600 mA	50 W	100	50	600	<25 $\mu$ V	1.57	5.58	6.83	2.2
DR-638T	Mobile	2 m / 70 cm	13.8 VDC	11 A	500 mA	5/10/25/50 W	758	50	600	<25 $\mu$ V	1.6	5.5	8.35	3.3
DR-735T	Mobile	2 m / 70 cm	13.8 VDC	12 A		5/20/50 W	1000	50	600		2.3	5.6	7.4	2.6
DRB185TH	Mobile	2 m	13.8 VDC	6 A / 20 A	500 mA	5/65-85	500	50	600	<25 $\mu$ V	1.7	6.44	7.21	3.3

\* Expand to 100 with optional EJ-19U †Expand to 240 with optional EJ-23U #TCXO with  $\pm 2.5$ ppm frequency stability.



## Single Band HTs



**DJ-V27T - 220 MHz**  
\$Call - HRO Prices

This compact, full-powered FM HT is submersible to 3 ft for 30 minutes. It is perfect for outdoor activities. Input frequencies directly from keypad. 200 memories plus one call channel. 39 CTCSS encode-decode settings. Digital coded squelch.

## Dual Band HT

**Dual Band  
2 m / 70 cm**

**DJ-500T**  
\$Call - HRO Price

The DJ-500T provides landmobile-grade operation with 5 Watts output, CTCSS, DTMF, DCS and 5 tones as standard features. Includes direct frequency input, alphanumeric channel labels, 200 memory channels, dot-matrix with 3 color selectable display. Li-Ion battery and stand charger standard.



## Tri-Band HT

**2 m / 70 cm / 1.2 GHz**  
**DJ-G7T**

\$Call - HRO Price

The DJ-G7T tunes 0.531-1300 MHz\* continuously. Full duplex receive with 144 / 430 / 1200 MHz bands. AM and WFM modes allow you to hear aviation and broadcast bands. Scan modes and options include 50 pairs of programmable scan memories. Timing adjustable priority scanning and Alinco's Channel-Scope - visualize the presence of radio signals on the display. Output power up to 5 Watts on 2 m.

\*Cell band blocked.



## Commercial Mobile



**Analog Dual Band  
2 m / 70 cm**

**DR-638T - \$Call**

With full duplex capability, cross-band repeat and a remotely mountable control head, the DR-638 is a solid performer for base or mobile operation. The large, 6 character alphanumeric display features variable colors for custom illumination. Ignition key on/off feature, theft alarm, extended receive capabilities, a variety of signaling and scan modes are also included. The backlit, DTMF microphone EMS-77 allows remote control of the transceiver.

- 758 channels programmable.
- H / M / L power output settings: VHF- 50 W / 25 W / 10 W / 5 W; UHF- 40 W / 25 W / 10 W / 5 W.
- Inversion scrambling.
- Internal duplexer - single antenna connector.
- Removable control head can be remotely mounted or inverted for optimal speaker placement.
- Expanded receive range includes AM civil aviation band.
- Crossband repeat.
- CTCSS, DCS, tone-burst tones, 2-tone and 5-tone signaling.
- CTCSS tone and DCS scan.
- Variety of scan modes and priority channel monitoring.
- TOT, BCLO, talk around, reverse and ANI.
- Utility software and cable cloning.
- Ignition key activated power on/off feature.



**AR-DV10  
SDR Receiver**  
\$CALL HRO Price



The new AR-DV10 by AOR is a wide-band SDR receiver covering 100 kHz - 1300 MHz.



It supports the ability to receive numerous digital protocols such as C4FM, DMR, APCO 25, TETRA, dPMR, NXDN, DCR and GMSK modes. This is in addition to the conventional analog modes of CW, SSB, AM and FM.

Thanks to its digital auto-mode feature, a received signal type is instantly recognized and the new AR-DV10 is automatically switched to the applicable digital or analog modes.

- Front speaker with 700 mW loud audio output.
- 2,000 memory channels, which can be divided into 40 banks of 50 memory channels each.
- Priority reception function.
- One-touch recording feature.
- Large full-dot matrix display.

**Extended  
Warranties  
Available on  
Many Radios..  
See Page 54.**

## Alinco Handheld Specifications

Model	Frequency Range	Power	Current Drain Xmit	Current Drain Rec	Power Out **	Memory Channels	Ant Z ohms	Mike Z ohms	Sensitivity at 12 dB	Height in	Width in	Depth in	Weight lbs
DJ-500T	2 m / 70 cm	7.4 VDC	1400 mA	70 mA	5 W	200	50	2k		3.86	2.32	1.38	0.5
DJ-A11T	2 m	7.4 VDC	1400 mA	300 mA	.5 / 2 / 5	128	50	2k	<25 µV	3.9	2.32	1.4	0.5
DJ-G7T	2 m/70 cm 1240-1299.995	7.4 VDC	1.6 A	200mA	5 W †	1000	50	2k	<15 µV	4.53	2.36	1.18	0.6
DJ-V27T	222-224.995 MHz	7.2 VDC	1.4 A	251 mA	6 W	200	50	2K	<2 µV	4.33	2.28	1.43	0.61

\*\* Power output is determined by choice of battery pack.

† at 13.8VDC

\* 500mW with 6 VDC #5W 220, 2.5 912MHz.



## HF / 6 Meter Transceiver



**The SDR Everyone Wants**

**IC-7610**

### Dual Receiver HF Excitement - RF Direct Sampling

The IC-7610 uses an innovative RF direct sampling system to convert the received analog signal to a digital signal. Then it applies sophisticated processing to produce extraordinarily clear audio with high signal-to-noise ratio. The ultra-low noise master clock oscillator yields superior TX and RX performance including an incredible 110 dB of RMDR (reciprocal mixing dynamic range) at 2 kHz frequency separation!

Independent dual receivers allow simultaneous dual reception of two bands and two modes. Independent RF/AF gain controls are provided, and the optional RC-28 USB remote encoder knob can provide a second tuning dial for greater operating flexibility (optional RS-BA1 remote control software is NOT required).

High performance features include 100 Watts of power on 160-6 meters on SSB / CW / FM / RTTY / PSK, built-in high-speed automatic antenna tuner, and digital IF filtering with digital twin passband tuning for outstanding interference rejection.

- Receives 0.30 – 60 MHz.
- DIGI-SEL digital receiver preselector provides tight RF filtering for both main and sub receiver front ends.
- Dual high-speed, high-resolution, real-time spectrum scopes and waterfall displays.
- High-resolution 7" touch-screen color display for quick, intuitive operation and effortless control of functions.
- Superior sound quality speaker.
- SD card slot saves settings and recorded communications. (SD card not included).
- External monitor via a DVI-D port.
- Ethernet port for IP remote operation capability (optional RS-BA1 software required).
- Compatible with PW-1 linear amplifier, SM-50 dynamic microphone, and AH-4 remote automatic antenna tuner options.

### Speaker SP-41

Designed to match the IC-7610. 7 W high quality with 2 input lines. Has tone select switches, input jack selector switch, headphone jack and speaker ON/OFF switch.



**IC-7700**

### Contester's Rig

The Contester's rig has two 32-bit floating point DSP units – one for the transmitter / receiver and the other for the spectrum scope. There is a +40 dBm 3rd order intercept point and ultra wide dynamic range. Two IF stages and Icom's image rejection technology allow very weak signals and very strong signals to be heard without distortion.

- 7" wide color TFT LCD. Spectrum waterfall display operated by PC mouse.
- Audio scope function.
- Waveform outline in real-time spectrum scope (ON / OFF).
- Remote control ops for RS-BA1.
- TX delay sets the timing to control an attached external linear amp.
- Added RIT and dTX commands for CI-V remote control.
- Internal distortion reduction.
- Icom's DIGI-SEL.
- Less internal phase noise.
- Multiple AGC loops; full control.
- 200 W power out at full duty cycle.
- Digital IF filters; twin passband tuning; three roofing filters; digital manual notch filter. Adjustable noise blanker.
- Ultra high stability OCXO unit.
- CW / RTTY / PSK31 operation.
- 50 MHz band preamp & mixer.
- Microphone equalizer.
- RF speech compressor.
- Digital voice recorder.
- Increase APF volume level.
- CF memory card.
- 4 antenna connectors.
- Double conversion super-heterodyne.



**IC-7300**

This HF transceiver has innovative features like the RF direct sampling used in many software defined radios. The real-time spectrum scope with waterfall function gives top-level performance in resolution, sweep speed, and dynamic range.

- SSB, CW, RTTY, AM and FM modes.
- Transmits on amateur HF frequencies plus 6 meters.
- Use the TFT LCD as a touch screen to set various functions and edit memory contents.
- 100 W output HF / 50 MHz bands.
- Built-in high-speed automatic antenna tuner.
- Multi-dial knob for smooth operation. Push to see menu items. Select with a touch of the screen and adjust levels by turning the multi-dial knob.
- Phase noise characteristics are improved about 15 dB (at 1 kHz frequency offset) when compared to other transceivers.
- Remote control operation for RS-BA1.
- Memory keyer functions for CW and RTTY.
- Voice memory function.
- RTTY decode log function.
- Screen capture.
- SD card slot.
- USB for CI-V and audio input / output.
- Large cooling fan system.
- Multi-function meter.
- 101 memory channels (99 regular and 2 scan edge channels).
- Multiple CW functions
- Digital noise reduction.



### Speaker SP-38

Get optimum sound quality with this high quality speaker, perfect for the IC-7300. Rated output is 5 W, maximum input power is 7 W. Impedance is 8Ω.

**HRO Price CALL**



**IC-7200**

### HF Plus 6 m

Shown with optional handles (MB-116)

The IC-7200 is a simple, tough rig for HF and 6 meters using the latest IF DSP technology. This entry-class transceiver has advanced digital features comparable to higher class rigs. Distortion and blocking from strong nearby signals are prevented by placing DSP functions inside the AGC loop. The built-in digital filter eliminates the need for optional CW and SSB filters. Features digital twin PBT, manual notch filter, digital noise reduction, and digital noise blanker. The direct digital synthesizer (DDS) creates a clear, clean transmit signal.

Other features: USB port for PC control, RF speech compressor, full break-in for CW, selectable CW carrier point, adjustable CW pitch, RIT, VOX, backlight LCD display, CI-V interface, 201 memories, preamplifier, band stacking register, built-in voice synthesizer and built-in 20 dB attenuator.



# HF BASE RIGS

# SOFTWARE

## The Pinnacle of HF Perfection



### HF Plus 6m IC-7851

The IC-7851 perfects HF operation with new features such as a 1.2 kHz optimized roofing filter to improve in-band adjacent signal performance. The new design outperforms competitors' similar models in the 2 to 10 kHz separation tests.

Unlike HF rigs using a conventional voltage controlled oscillator for the 1st LO, the IC-7851 uses a direct digital synthesizer (DDS) with a voltage controlled SAW oscillator (VCSO). This new 1st

LO design sets a benchmark for phase noise with -150 dBc / Hz at 10 kHz offset (and -140 dBc / Hz at 1 kHz offset).

The IC-7851 also has the spectrum waterfall function found in the IC-7700. The high-resolution waterfall screen shows the changing amplitude of frequencies over time. An enhanced spectrum scope promotes fast and accurate scan and can be operated with PC mouse via USB port. Dual scope function shows simultaneous activity in both bands to help search a sub-band while maintaining a run frequency on the main band.

### All-Band HF IC-718



- Receives 0.03 ~ 29.995 MHz.
- 101 memory channels.
- Modes USB, LSB, CW, RTTY, AM.
- IF shift interference rejection.
- Output power: SSB/CW/RTTY: 5 ~ 100 W variable, AM: 2 ~ 40 W variable.
- Transmits amateur HF except 60 m.
- AF DSP built-in.

- Built-in electronic keyer.
- VOX operation, mike compressor, RF gain control.
- 10-key pad for direct operating frequency entering and memory channel selection.

**Warranties.  
See Page 54.**

## Icom HF Specifications

Model	Receive Freq Range	Power Supply	Current Drain Xmit	Power Output †					Mike Z ohms	Receive Circuitry	Sensitivity 1.8-30 MHz	RIT / XIT Range	Notch	Audio
				AM	FM	SSB	CW	FSK						
IC-7100	30 kHz - 199.9999 MHz, 400 - 470 MHz	13.8 VDC	22A	1-40W	##	##	##	##	600	Triple Conversion	<18µv at 10 dB	±9.9 kHz	Man + auto	>2.0 W
IC-7200	30 kHz - 60 MHz	13.8 VDC	22A	1-25W		100 W	100 W	100 W		Triple Conversion	<16µv at 10 dB	±9.9 kHz	Manual	>2.0 W
IC-7300	30 kHz - 60 MHz	13.8 VDC	21A	1-25W	100 W	100 W	100 W	100 W	600	Direct Sampling	<16µv at 10 dB	±9.9 kHz	Man + auto	>2.0 W
IC-7610	30 kHz - 60 MHz	13.8 VDC	23A	1-25W	1-100	1-100	1-100	1-100	600	Direct Sampling	<15µv at 10 dB	±9.9 kHz	Man + auto	>2.0 W
IC-7700	30 kHz - 60 MHz	85-265VAC	5.6A	50W†	200†	200†	200†	200†	600	Double Conversion	<16µv at 10 dB	±9.9 kHz	Man + auto	>2.6 W
IC-7851	30 kHz - 60 MHz	85-265VAC	5.6A	50W†	200†	200†	200†	200†	600	Double Conversion	<16µv at 10 dB	±9.9 kHz	Man + auto	>2.0 W

† Output is continuously adjustable from 5 to full power. \* 50 W on 2 meters, 20 W 70cm. ## 2-100 W HF / 50 MHz, 2-50 W VHF, 2-35 W UHF.

## Software

### RS-BA1

### IP Remote Control for HF Transceivers



Remotely control Icom transceivers through an IP network with the RS-BA1. It allows you to use the radio installed in another room using your home network or a remote location over the Internet. The low voice latency caused by the RS-BA1 provides the same operational experience as using an actual radio. Most functions and modes of your transceiver can be controlled.

The RS-BA1 has two component applications: System Configuration to set up the IP address and other settings, and Remote Control allows you to control the radio. The display on the RS-BA1 is similar to the radio's front panel. Supports the IC-7100, 7200, 7410, 7300, 7600, 7610, or 9100 with USB connection to a PC. Also the IC7800 or 7700 connected to a PC with an RS-232C cable plus S/P DIF or ACC cable.

## HF Tuner

### Auto Antenna Tuner



### AH-4

The AH-4 auto-tuner covers all amateur bands from 80 to 6 meters when used with a minimum 23' long wire antenna. With the optional AH-2b antenna element, tune 40 through 6 meters for mobile operation. It has automatic band changes and tunes usually in less than 2.5 seconds. The 45 memories store SWR minimum and tuning combinations. Requires only 300 mW to tune and handles up to 120 Watts. **HRO**  
**Price \$279.95**

## Icom Cloning

Icom cloning software for Windows allows you to preprogram memory channels with operating frequencies, set tones, set power levels, set squelch levels, set up auto-dial DTMF frequencies, and exchange operating frequencies. (Call for price quotes.)..

- **CS-V80** without cable (V80A).
- **CS-2300H** without cable (2300H).
- **CS-T70A** without cable (T70A)\*.
- **CS-7100** without cable (IC-7100)
- **CSR-8600** without cable (IC-8600)\*
- **CS-9100** without cable (IC-9100)\*.

\* OPC-478U USB cable optional

**Order Online @  
hamradio.com**



## Dual Band Analog Mobile

### Practical Dual Bander

**IC-2730A \***  
with Optional  
Bluetooth  
Headset



This high performance mobile radio is a classic 2 m / 70 cm operation.

- Wideband receiver 118-174 / 375-550 MHz.
- Large backlit LCD screen.
- V/V & U/U simultaneous receive.
- Hands-free capable with optional UT-133.
- Optional VS-3 Bluetooth® headset.
- Cross band repeater capability.
- CS-2730 free download PC programming software.
- 50 Watts output on VHF and UHF.
- Squelch delay and squelch attenuator.

- Built-in 50 CTCSS and 104 DTCS tones with split tone function.
- Controller attachment to the main unit (with optional MBA-4).
- 1052 memory channels including 50 scan edges and 2 call.
- Weather channel receive with weather alert (USA version only).
- HM-207 remote control mic is standard.
- 16 DTMF autodial memories.
- CI-V remote control capability (through the optional OPC-478UC).

\*Deluxe version includes MBA-5 remote head bracket.

## Handheld Batteries & Chargers

### "AA" Alkaline Packs

BP-204, BP-208N, BP-263, BP-273

# Requires BC-147S AC adapter.

\* Requires BC-123S AC adapter.

\*\* 220 version available

Model	Volts	Rating mAh	Trickle Charger	Rapid Charger
BP-206	3.6	1650	BC-149A-02	BC-156
BP-210N	7.2	1650	BC-146-01#	BC-144N-51
BP-222N	7.2	600	BC-146.01#	BC-144N
BP-227	7.2	1700	BC-146-01#	BC-119N-51
BP-256	7.4	1620	BC-167SA	BC-177-02
BP-264	7.2	1400	BC-192-12#	BC-191-12* **
BP-265	7.4	1150		BC-193* **
BP-271	7.4	1150	BC-167SA	BC-202**
BP-272	7.4	1880	BC-167SA	BC-202

## Single Band Analog Mobile

### 2 m Mobile IC-2300H

The IC-2300 2m mobile transceiver boasts a powerful 65 W output, simple-to-use user interface, and built-in CTCSS / DTCS encoder / decoder.



- Simple operation with a large tuning dial.
- 207 alphanumeric memories.
- Dynamic memory scan allows scanning of selected memory banks.
- Pocket beep function for incoming calls.
- DTMF autodial.
- Select yellow, green or amber display.
- PC to XCVR and XCVR to XCVR cloning (optional software and cable required).
- Automatic repeater function and weather channel (USA only).
- Power supply voltage display, time-out timer, repeater lock out, auto power off.
- Selectable squelch delay and squelch attenuator.
- Wide / narrow channel setting.
- Passed MIL-STD 810G specifications.

## Icom Handheld Accessories

		V80	ID-51A & 31A	T70 HD	HRO Price
Battery Packs	BP-264	◆		◆	\$36.95
	BP-265	◆		◆	\$46.95
	BP-271		◆		\$74.95
	BP-272		◆		\$99.95
Battery Cases Carrying Cases	BP-263	◆		◆	\$26.95
	BP-273		◆		\$49.95
	LC-174			◆	\$37.95
	LC-178		31A		\$28.95
	LC-179		51A		\$34.95
	SJ-1		51A		\$34.95
Cables	CP-12L		◆	◆	\$34.95
	CP-17L	◆			\$24.95
	CP-19R		◆	◆	\$39.95
	OPC-254L		◆	◆	\$16.95
	OPC-478	◆		◆	\$39.95
	OPC-478UC	◆		◆	\$60.95
	OPC-515L			◆	\$20.95
	OPC-2004	◆			\$18.95
	OPC-2006LS*		◆		\$29.95
	OPC-2144		◆		\$29.95
Speaker Mics	HM-75LS		◆		\$74.95
	HM-131			◆	\$37.95
	HM-153LA	◆		◆	\$89.95
	HM-153LS		◆	◆	\$135.95
	HM-166LS		◆		\$79.95
Headsets	HS-94	◆	◆	◆	\$22.95
	HS-95	◆	◆	◆	\$144.95
	HS-97	◆	◆	◆	\$35.95
Other	SP-27			◆	\$35.95
	AD-92SMA		◆	◆	\$18.95
	MB-124	◆		◆	\$10.95
	FA-S270C			◆	\$33.95

\* Cable only to be used with HS-94, 95, or 97.

## Icom Handhelds

Model	Frequency	Power Supply	Power Out Transmit*	Current Transmit	Drain Receive	Sensitivity at 12 dB	Height in(cm)	Width in(cm)	Depth in(cm)	Weight oz(g)	HRO Price
IC-T70HD	2m / 70 cm	7.2 VDC	5.0/2.5/5 W	2.1 A	<450 mA	<.18µV	4.8 (11.1)	2.3 (5.8)	1.2 (3.0)	13.4 (380)	CALL
IC-V80	2m	7.2 VDC	5.5/2.0/5 W	1.4 A	310 mA	<.14µV	4.4 (11.2)	2.3 (5.8)	1.2 (3.0)	12.7 (360)	CALL
ID-31A	70 cm	7.4 VDC	5.0/2.5/ 1.0 W	2.5 A	450 mA	<.12µV	3.7 ( 9.4)	3.7 (9.5)	1.0 (2.4)	7.8 (220)	CALL
ID-51APlus-2	2m / 70 cm	7.4 VDC	5.0 /2.5/1.5 W	2.5 A	<450 mA	<.18µV	4.1 (10.5)	2.28 (5.8)	1.0 (2.6)	9.0 (255)	CALL

\* Power with standard battery pack. † Frequency coverage 138-174 (receive only outside amateur bands), 440-450 MHz.

# Extended receive 118-174 MHz and 400-470 MHz. % 0.495-999.99 cellular blocked.



## Analog HTs



### IC-T70A-HD Dual Band

The IC-T70A offers impressive audio output volume, long-lasting power, plenty of memory channels, rugged construction, and analog features:

- TX: 2 m / 70 cm bands.
- RX: 136-174, 400-479 MHz (US version).
- Power out selectable – 5 W / 2.5 W / 0.5 W.

- 700 mW loud audio.
- Long lasting battery life. Up to 13.5 hours with supplied BP-265.
- External DC power jack.
- 302 alphanumeric memories including 50 band edges and 2 call channels. Maximum of 26 memory banks for scanning.
- Built-in CTCSS / DTCSS.
- Internal VOX, WX channel, direct keypad frequency entry, 16 DTMF autodial memories.
- IP54 / MIL-STD-810 rugged construction.



### IC-V80 HD Basic Rugged 2 Meter with Powerful Audio

An economical 2 m HT with BP-265 battery and drop-in charger.

- WX channel.
- 5.5 Watts out.
- 207 memory channels.
- Internal VOX function.

- Up to 19 hours use with optional BP-265.
- Built-in CTCSS / DCS.
- IP54 / MIL-STD-810 rugged construction.

## IC-R6 Accessories

Model	Description	HRO Price
<b>Cloning</b>		
OPC-478	Cloning Cable (RS-232C)	\$39.95
OPC-478UC	USB PC to Radio Programming Cable	\$60.95
<b>Headphone Accessories</b>		
SP-27	Tube Earphone	\$35.95
<b>Other Accessories</b>		
AD-92SMA	BNC antenna adapter	\$18.95
BC-194	Charger Stand	\$29.95
CP-18A	Cigarette Lighter Cable	\$33.95
FA-S270C	Antenna (same as supplied)	\$33.95
CT-17	CI-V Level Converter	\$135.95

## Receivers



### IC-R30

The latest addition to the Icom receiver line has great new features:

- Dual Receive on different bands and different modes.
- Dual Band Recording to individually record the audio of the two bands received.
- Digital Decode of various digital protocol signals, including P25 (Phase 1), NXDN™, dPMR™, D-STAR (Digital Smart Technology for Amateur Radio) and Japanese domestic DCR (Digital Convenience Radio).

- Wideband coverage - covers .01 to 3304.99 MHz. Demodulates conventional analog signals such as AM, FM, WFM, USB, LSB and CW as well as digital modes.
- Integrated GPS receiver.
- Record and playback from optional microSD card.
- Built-in USB port for charging and data transfer and CI-V control
- Wireless listening with optional VS-3 bluetooth headset.



### IC-R6 Sport

The IC-R6 is a Signal Search Machine. Covering 100 kHz to 1309.995 MHz (cellular blocked and receives analog TV only), it can search 100 channels per second.

The receiver is energy-efficient, designed to provide up to 15 hours of listening on a single charge.

With 1300 alphanumeric memory channels, 50 scan edges, and 200 auto-write memories, there are many scanning opportunities. The bank link feature allows connecting any of the 22 memory banks. The Voice Squelch Control opens the squelch only when a modulated signal is detected.

Available in black, red, or blue.



### IC-R8600 Wideband Receiver

- Ultra-wide frequency coverage (10 kHz-3 GHz) with RSSI (received signal strength indication) function.
- Fast moving, real-time spectrum scope and waterfall.
- Decodes multiple digital protocols, including D-STAR®, NXDN™, dPMR™ and APCO P25.
- Large 4.3 inch TFT color touch screen display.
- Clear audio quality using FPGA / DSP base architecture with superheterodyne circuitry.
- Optional IC-CSR8600 PC remote control software allows control of all receiver functions.
- I/Q signal output for use with third-party SDR software and/or external decoding.
- SD card slot for logs and voice recording.
- Optional SP-39AD external speaker with integrated power supply.

### SP-39AD Speaker / Power Supply

This 4 watt 8 ohm speaker has an integrated 15 Volt, 2 Amp power supply. It has a flip stand and matches the IC-R8600 receiver.

- Rated Input Power: 5 watts.
- Maximum Rated Power: 7 watts.
- Rear Panel Output: Hard-wired audio cable to 3.5mm mono mini plug.
- Rear Panel Input: AC cord plug Impedance: 8 ohms.
- Audio Cable: 5.5 feet (1.7m)
- Size: 3.9 x 3.5 x 9.5 inches



### IC-R9500 Professional Communications Receiver

- +40 dBm IP3 / 109 dB wide dynamic range.
- Measuring class accuracy. Dual IF filter.
- Superior BPF unit.
- Dual DSP. 10 VFOs.
- 7" wide color TFT LCD.
- High resolution spectrum scope. 1000 memories.
- 2 channel noise blanker.
- 5 roofing filters. 2 point manual notch filter.
- 0.005-3335 MHz. Cellular blocked.
- All bands: SSB, CW, FSK, AM, FM, WFM on some.
- Digital voice recorder.
- 4 antenna connectors



## HF and More With D-Star

**HF Plus**  
**6 m / VHF / UHF**  
**with D-STAR**

**IC-7100**



### Multi-Band All-Mode Operations

- Intuitive touch screen interface.
- Easy-to-see, easy-to-use slant top controller.
- Built-in high efficiency oval speaker on the controller.
- D-STAR DV mode digital voice and low speed data communications.
- 505 memory channels.
- SWR graphic display.
- Optional MBF-1 mounting base.
- Built-in SD card slot for voice storage and data cloning.
- Built-in RTTY functions.
- Easy vehicle mounting (optional MBF-1).
- IF DSP controlled digital features. The 32-bit floating point DSP supports many digital processing features such as digital IF filter, twin PBT and manual notch filters.
- Remote Control Software (optional RS-BA1 IP).
- CW full break-in.
- CW auto tuning.
- USB Audio/Control.
- IF-DSP.



**IC-9100**

**VHF / UHF Satellite Plus HF / 6 m**  
**Plus D-STAR DV Mode**

With built-in satellite mode operation, the IC-9100 covers HF / 50 MHz, 144 / 430 (440) MHz, and, with the optional UX-9100, 1200 MHz frequencies.

The rig has 100 Watts output on HF / 50 / 144 MHz; 75 Watts on 430 (440) MHz; 10 Watts on 1200 MHz.

- Double superheterodyne receiver with image rejection mixer.
- SSB, CW, RTTY, AM
- DV mode with the optional D-STAR unit.
- 32-bit floating point DSP and 24-bit AD / DA converter.
- Optional 3 kHz (FL-431) and 6 kHz (FL-430) 1st IF (roofing) filters.
- USB Audio/Control. IF-DSP.

### IC-9100 Accessories

**UX-9100**



**1200 MHz Unit**

This optional module adds the 23 cm (1200 MHz) to your IC-9100. This supports DSTAR in voice and low speed data only.



**UT-121**

**D-Star Digital Board**

# D-STAR CENTRAL

## D-Star Mobiles

**ID-4100A**

**Dual Band**  
**D-STAR**  
**GPS Mobile**



Terminal & access point modes. Extend D-STAR coverage with the Internet DR (D-STAR repeater) function. (Optional data cable and free-download application required.)

- Full dot-matrix display with easy-to-read characters and icons.
- Compact, detachable controller for flexible installation.
- Bluetooth capable for hands-free operation. (Optional Bluetooth unit and readset required.)
- Integrated GPS and microSD card slot. (MicroSD card required.)
- Enhanced remote control apps for smart devices. (Optional Bluetooth unit and free download application required.)
- iOS app.
- Terminal/access point mode.

**ID-5100A Deluxe**

**Dual Band D-STAR**  
**with**  
**Touch Screen**



This ID-5100A dual band D-STAR mobile has a large, responsive touch screen LCD and Bluetooth connectivity.

- Wideband receive (118-137 MHz (AM), 137-174 / 375-550 MHz only).
- Antenna RX diversity (second antenna connector).
- DTMF decode / DV / FM repeater list.
- Optional UT-133 Bluetooth unit enables audio accessory connection and Android terminal connection (CI-V via Bluetooth SPP profile).
- Optional VS-3 Bluetooth pendant earpiece mic.
- 1,000 memory channels.
- Built-in GPS engine.
- Includes MBA-2 remote head bracket.
- RS-MS1A Android application: a free-to-use download.
- Independent VHF and UHF band units (VV / UU capable) for 50 W output.
- D-Plus reflector usability (select "reflector" in TO field).
- DV dual watch for simultaneously waiting in two DV voice streams (decodes one only).
- Home button (same as ID-51 feature).
- HM-207 control microphone is supplied as standard.

**Extended Warranties Available**  
**for Icom Radios.**  
**Details on Page 54.**



## D-Star Dual-Band & 70cm Handhelds

### ID-31A Plus D-STAR® 70 cm Handheld With Terminal Mode and Access Point Mode

The ID-31A PLUS is a 5 W UHF single bander, both with D-STAR and integrated GPS receiver. You can use another D-STAR radio to send your voice and/or data through the access point radio, and communicate with D-STAR stations all over the world. Its features are similar to the ID-51A PLUS-2.



The radio features Terminal Mode, Access Point Mode, DV / FM Repeater Search Function, DV Past Data Mode, Integrated GPS Receiver, microSD Card Slot, IPX7 waterproof construction, and RS-MS1A remote control software (free download Android™ application from Google Play™). The ID-31A is available in Red, Silver and Gold color versions.

Other Features include:

- Three hours rapid charging with supplied wall charger (BP-271).
- Long lasting battery pack.
- CS-31PLUS programming software supplied.
- Enhanced D-PRS functions link commands.

- 5 W output power.
- VHF / UHF dual band.
- Integrated GPS receiver.
- Four power settings available: 5.5 / 2.5 / 1.0 / 0.5 W.
- Includes IC-OPC-2350LU data cable. (ID-51A PLUS2 Only)
- Transmit 144-148 and 430-450 MHz. (ID-51A PLUS2 Only)
- Receive A: 137-174; B: 108-174, 380-479 MHz (ID-51A PLUS2 Only)
- Broadcast receive 0.52-1.710, 88-108 MHz.
- Listen to FM, AM, and SWL while using the dual watch function for hambands. (ID-51A PLUS2 Only)
- MicroSD card slot for voice, log data storage, and data cloning.
- Voice memory records incoming and outgoing calls. Can be used as a voice recorder.
- Automatic position reply function transmits your current position when receiving a call.
- CSV formatted com log. GPS log function.
- 1304 memory channels.
- Send and receive pictures.
- D-STAR DV mode with improved data transfer.
- Speech function gives frequency, mode, and call sign.
- IPX7 submersible.
- V/V, U/U, V/U dual watch receives two bands simultaneously. (ID-51A PLUS2 Only)
- CTCSS and DTCSS.
- Integrated GPS position data can be sent simultaneously. Altitude data added to GPS memories.
- Repeater search function searches up to 20 nearby.
- Enhanced D-PRS functions: receiving only base / object / item / weather formats.
- Send CI-V commands through DATA connector.
- Callsign, repeater list and GPS memory import and export in the CSV format.
- RS-MS1A Android™ application for the 51A Plus only (OPC-2350LU cable now included).
- Additional dplus reflector link commands.
- DV and FM repeater search function.
- CI-V commands added such as GPS TX mode, DV data TX, and GPS ON/OFF settings.
- PC programmable; CS-51 cloning software supplied.
- Full dot-matrix display and directional keypad.
- Choose Black, Blue Cloud, Gray Camo, Green Leaf, Red Cross for the ID-51A Plus.

### ID-51A Plus-2 D-STAR®

### Dual-Band 2 m / 70 cm Handheld With Terminal Mode and Access Point Mode


The D-STAR evolution continues as Icom introduces the third generation ID-51A PLUS-2, adding two NEW D-STAR modes of operation: Terminal Mode and Access Point Mode. The new modes allow you to make calls through the Internet, even from areas where no D-STAR repeater is accessible.



#### Terminal Mode



#### Access Point Mode

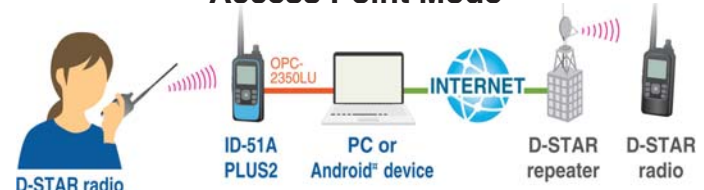

### Icom Mobile Specifications

Model	Freq Range	Mode	Power Supply	Current Drain Xmit	Current Drain Rec	Power Out Watts	Ant Z ohms	Mike Z ohms	Sens	Audio Power	Built-in AC Supply
IC-2300H	2m †	FM	13.8 VDC	11 A	1.5 A	65	50	600	<.18 $\mu$ V	4.5 W	no
IC-2730A	2m / 70 cm	FM	13.8 VDC	13 A	1.8 A	50	50	600	<.32 $\mu$ V	>2.0 W	no
ID-4100A	2m / 70 cm	FM/D Star	13.8 VDC	13 A	1.8 A	50	50	600	<.15 $\mu$ V	>2.0 W	no
ID-5100A	2m / 70 cm	FM/D Star	13.8 VDC	13 A	1.8 A	50	50	600	<.15 $\mu$ V	>2.0 W	no

† Extended receiver coverage 118-174 MHz (airband included), 440-450 MHz %extended receiver range. See text with radio.

## HF / 50 MHz Transceiver



**TS-990S** \$CALL HRO Price

The TS-990S raises the bar on HF performance and DX operating ease. Dual display and dual watch gives you the edge in DX contesting.

- Frequency range HF + 50 MHz.
- Output pwr: 5-200 W.
- Built-in antenna tuner.
- Mode: SSB, CW, FSK, PSK, FM, AM.
- Built-in switching power supply.
- Comm ports: USB A / B and LAN.
- Dual TFT display and dual receiver. Main display monitors target signal vicinity and sub display monitors actual target signal.
- Down conversion for all Amateur Radio Bands (main receiver).
- IP3 + 40 dBm mixer performance.
- Narrow-band high-IP roofing filters.
- TCXO  $\pm 0.1$  ppm for high stability receive.
- Dedicated triple DSP for main & sub-receivers plus band scope.
- Remote PC operation.
- Data mode facilitates switching between external terminals.
- Advanced AGC – digital and analog.
- 2-step split frequency configuration for quick setup.
- Maximum of 120 memory channels. Dual channel memory allows access while receiving two frequencies simultaneously.
- Memory accessible during split/sub receiver operation.
- Two USB sockets on front panel.
- Firmware updates via USB stick or cable.
- VCO division-type first oscillator divides high frequencies to ensure high C/N.
- Dedicated triple 32-bit floating point DSPs for main & sub receivers plus band scope, audio scope and S-meter.
- Cooling system capable of providing ample airflow to each unit to ensure a stable 200 W output.



**TS-890S**  
\$CALL HRO Price

The Kenwood TS-890S transceiver features a full down conversion receiver with h-mode mixer and High C/N 1st LO with four built in roofing filters: 500 Hz, 2.7 kHz, 6 kHz and 15 kHz (optional 270 Hz). This new transceiver has a 7 inch color TFT display and includes roofing frequency sampling band scope, auto scroll mode and multi information screen. Heavy-duty construction and a high-speed 100 W antenna tuner come standard. The configuration of the band scope receiver has changed from the superheterodyne system used in the TS-990S to 1st IF sampling using an A/D converter (14bit/39MHz), and FPGA digital down conversion. This means a change in scanning method from step FFT to FFT, achieving high-speed updates to the display irrespective of span settings.

- Cross tone.
- IF filter shape, AF filter.
- Audio peak filter, AGC quick recovery.



- Notch filter, noise blanker.
- Highly reliable 100 W final-stage amplifier circuit for HF and 50 MHz.

## HF / 50MHz All-Mode Transceiver

### Peerless Performance

**TS-590SG**  
\$CALL HRO Price

The TS-590SG is an upgrade to the TS-590S and features a narrow-band roofing filter to significantly reduce interference from unwanted signals. The resulting excellent RX performance reveals signals that would be hidden to lesser rigs. With IF AGC based on advanced DSP technology, Kenwood has essentially redefined HF performance.



- Has sharp 500 Hz / 2.7 kHz roofing filter and dedicated first mixer.
- Built-in electronic memory keyer.
- Programmable keys, 110 memory channels, memory scroll function, multiple scan functions.
- Advanced AGC through digital signal processing from the IF stage onward, digital IF filters, detection and demodulation, noise reduction and IF notch IF auto notch, IF AGC, AF digital signal processing, two types of noise reduction, and TX audio shaping.

- Direct frequency entry, USB connectivity for PC control, remote control using a computer, optional voice guide and storage unit.
- Morse code decoder function.
- Transmitter features: 100 Watt heavy-duty design, built-in automatic antenna tuner, optional TCXO, drive output, speech processor (SSB / AM / FM), adjustable TX filter (SSB / AM), TX equalizer, TX monitor; VOX, adjustable TX power output and CAR level.
- Split function enabling quick setting.

## Kenwood HF Specifications

Model	Receiver Frequency Range	Power Supply		Current Drain		Power					Mike Z ohms	Receive Circuitry	Sensitivity	RIT / XIT	Notch Filter	Audio
		50/60 Hz AC	DC	Xmit	Rec	AM	FM	SSB	CW	FSK						
TS-590SG	0.13 MHz - 60 MHz		13.8 V	20.5 A	1.5 A	25	100	100	100	100	600	#	< .2 $\mu$ V	$\pm 9.99$ kHz	> 70 dB	1.5 W
TS-480SAT†	500 kHz - 60 MHz		13.8 V	20.5 A	1.5 A	25	100	100	100	100	600	#	< .2 $\mu$ V	$\pm 9.99$ kHz	–	2 W
TS-480HX	500 kHz - 60 MHz		13.8 V	41.0 A	1.5 A	50	200	200	200	200	600	#	< .2 $\mu$ V	$\pm 9.99$ kHz	–	2 W
TS-890	1.81-29.7 MHz 50-52 MHz 70-70.5 Mhz		13.8 V	22.5A	2.5A						600	Double Superheterodyne	< .2 $\mu$ V	$\pm 9.99$ kHz	> 70 dB	1.5 W
TS-990S	0.13 -30 MHz 50-54 MHz	yes		720VAC	120VAC	50	200	200	200	200	600	Double Superheterodyne	< .2 $\mu$ V	$\pm 9.99$ kHz	> 70 dB	1.5 W

# Double Conversion SSB, CW, AM; Triple FM (1)170, 200, 425, 850 Hz \*Output 440 MHz 50 W and 1000 MHz 10 W

†Output 6 M 480 HX - 100 W / 50 W AM 480 AT 50 W / 25 W AM



## Compact, Portable HF Mobile Transceiver



**TS-480HX / TS-480SAT**

**\$CALL** – HRO Price

With its separate control panel, the TS-480 is perfect for base station use, while ample receive audio makes it outstanding for mobile applications. Using 13.8 V for power, the TS-480HX delivers 200 W; the TS-480SAT delivers 100 W and has an automatic antenna tuner.

- 500 kHz–60 MHz general coverage receiver.
- Separate LCD control panel with speaker. It can be positioned up to 4 meters from the main unit.
- PC-based control.
- TX / RX AF DSP. 16-bit AF digital signal processing offers noise reduction, TX / RX equalizer and AF filters.
- Optional IF filters available.
- TX covers all amateur bands 1.8 MHz to 60 MHz plus 5 MHz band for the US.
- Quad-mixer provides RX dynamic range in the TS-950 class.
- PSK-31 compatibility.
- Packet cluster tune with optional TM-D710A with user supplied cables.
- Additional front panel available.

## 2 Meters plus Weather

**TM-281A**

**\$CALL**

– HRO Discount Price



On or off road, the TM-281A delivers powerful mobile performance with 65 W maximum output. The weather alert radio function checks the 1050 Hz tone from NOAA (US only). The radio features 200 memories (100 if memory channel names are assigned to the channels), menu for easy control and function selection, CTCSS or DCS to reject unwanted calls, easy to read large LCD alphanumeric display, FM and narrow band FM ready, and free PC memory control software is available.

## Dual-Band Mobiles

**TM-D710G**  
**2 m / 70 cm**

**\$CALL** – HRO Discount Price

Kenwood provides advanced APRS® ham radio equipment with the TM-D710G mobile transceiver. It offers even more features and versatility than its predecessor. The detachable control head comes with remote cable for easy installation.

The radio incorporates a 9-pin PC connection for easy hook-up to program frequencies and other APRS® mapping programs. Your TM-D710G is a full dual-band radio so VHF+VHF / VHF+UHF / UHF+UHF operation is possible. Full digipeater functions allow anyone to set up a digipeater location wherever needed to help fill in APRS® nationwide network. Internet gateway operation is also possible for world-wide text communication over VHF.



- Now includes built-in GPS and up-graded firmware.
- Output 50 W VHF / UHF.
- Receives 118-1300 MHz (cellular blocked).
- Two back light colors: amber / green.
- Alphanumeric dot-matrix LCD display.
- Easy-to-use menus. 1000 memories.
- Internal clock for APRS® time & date stamping.
- APRS® filter and sort functions.
- APRS® speed and altitude beaconing.

- Three different APRS® grids.
- EchoLink® ready with 10 dedicated memories.
- APRS® QSY function, delay algorithm, voice alert and weather beaconing.
- Dual receive and NOAA weather alert.
- SkyCommand II.
- Sound card interface.
- VGS-1 voice guide and storage optional.
- NMEA 0183 GPS i/O port.
- Free MCP programming software.



**TM-V71A**  
**2 m / 70 cm**

Kenwood's TM-V71A FM dual bander is equipped to shine in any mobile communications role. It features 50 W output, 1000 memory channels, multiple scan options and PC connectivity.

- High power output: 50 W on VHF/UHF.
- Same band dual receive (V/V, U/U, V/U).
- Compatible with ARRL TravelPlus.
- "Five-in-One" programmable memory storing five different operating profiles.
- 1000 split memory channels plus an additional 10 for programmable scan.
- PC programmable w/PG-5G (optional).
- Built-in CTCSS/DCS encoder.
- 104-code digital code squelch.
- Invertible front panel.

- Choice of backlight (amber / green).
- Voice guidance and storage option with optional VGS-1.
- Weather alert / RX (US only).
- EchoLink® Sysop mode for node terminal operation.
- EchoLink® memory autodialer.
- Wide band receive (118-524 MHz and 800-1330 MHz cellular blocked).
- Backlit MC-59 16-key hand mic.
- Selectable repeater offset or auto repeater offset (on VHF only).

**HRO Offers Extended Warranties on Kenwood Radios. See Page 54.**

## Single Band

### TH-K20A 2 m

This 2-meter handheld is the successor to the TH-K2 series.

- Tone alert (bell).
- Cross tone.
- 5.5 W RF output.
- Weather CH scan.
- VOX Included (optional headset required).
- Battery capacity indicator.
  - Auto repeater offset.
  - Direct function key.
  - Firmware upgradable.
  - Built-in CTCSS, DCS and 1750 Hz tone burst.
  - Direct frequency entry.
  - Auto repeater offset.
  - Time-out timer.
  - Beat shift.
  - Frequency shift.
  - Key lock type select.



## Dual Band

### TH-D72A 2 m / 70 cm

### Enhanced GPS & APRS® capability

- 2 m / 70 cm transmit with wide band receive.
- Dual receive, V/V, U/U, V/U, U/V.
- 5 Watts transmit.
  - Built in GPS uses the SiRF Star III chipset (same as Garmin).
  - GPS track logging function. Memory can be output to PC in KML format to be displayed on Google Maps.
  - 1000 memory channels with 8 digit alpha name function.
  - Built in 1200 / 9600 TNC AX.25 with KISS mode and digipeat functions.
  - Mini USB connector built-in.
  - Built-in Kenwood Sky Command II.
  - Smart beaconing.
- External GPS ready, built in RS-232 com port (same as D7).
- Air band RX with 8.33 kHz step.
- Free programming software.



## APRS / D-STAR®

### TH-D74A 2 m / 220 Mhz / 70 cm Tri- Band

The industry's first portable amateur radio supporting both APRS and D-STAR®.

- Transmits: 144-148, 222-224.995, and 430-450 MHz.
- Four transmit power selections: (5 / 2 / .5 / .05 Watts).
- Band A receives: 136-174, 216-260, & 410-470 MHz.
- BandB Receives: .1-524 MH (76-108 WFM).
- High-performance DSP for quality audio.
- TFT color LCD for excellent visibility.
- APRS data transmission / reception.
- Built-in GPS. Built-in TNC.
  - Store up to 100 stations.
  - 1000 Alpha memories.
  - QSY function.
  - D-Star compatible.
  - DV fast data mode.
  - Wideband multi-mode reception.
  - Flexible operation of voice mode and data mode.
  - IF filter handles adjacent unwanted signals.
  - IF output mode.
  - Weatherproof (IP54 / 55).
  - Bluetooth® standard.



## Kenwood VHF / UHF Specifications

Model	DC Power Supply	Transmit	Receive	Output Power	Sensitivity	HRO Price
TM-281A	13.8 V	13 A	1.2 A	65 W	<.16 $\mu$ V	CALL
TM-V71A	13.8 V	13 A	1.2 A	50 W / 50 W	<.16 $\mu$ V	CALL
TM-D710G	13.8 V	11.5 A	1.0 A	50 W / 50 W	<.16 $\mu$ V	CALL

## Handheld Battery Packs

Battery	Voltage	Rating MAH	Desk Charger	Radio Series	HRO Price
PB-45	7.4	1800	KSC-32	TH-D72A	\$69.95
KNB-65L	7.4	1520	KSC-35S	TH-K20A	\$47.95
KNB-74LW	7.4	1100	KSC-25LSK	TH-D74A	\$74.95
KNB-75LW	7.4	1800	KSC-25LSK	TH-D74A	\$84.95

**HRO Offers Extended Warranties for Kenwood Radios.**

## Kenwood Handheld Specifications

Model	Freq Range	Power Supply	Power Out	Current Transmit	Current Receive	Sensitivity	Height in (cm)	Width in (cm)	Depth in (cm)	Weight oz (g)	HRO Discount Price
TH-K20A	144-148 MHz	6-9 VDC	5.5 W			<.16 $\mu$ V	4.4 (11.2)	2.13 (5.4)	1.0 (2.5)	7.4 (210)	CALL
TH-D74A	144/220/440MHz	5-7.5VDC	5 W			<.18 $\mu$ V	4.72(11.9)	2.2(5.5)	1.33(3.4)	7.13 (202)	CALL
TH-D72A	144/440MHz	7.4VDC	5 W			<.18 $\mu$ V	4.78(12.1)	2.28(5.8)	1.31(3.3)	13.1 (370)	CALL





## FTdx5000MP Limited

**\$CALL for HRO Price**

*The FTDX 5000 MP Limited HF / 50 MHz 200 Watt transceiver is a premium class Yaesu radio with two independent receivers plus many unique options and accessories designed to meet the performance requirements of even the most demanding amateur operator.*

## Desk Microphones



**M-1**  
**\$CALL**  
HRO Price

Revolutionary dual microphone configuration has both dynamic (for depth and warmth) and condenser (for crisp highs) elements. The M-1 lets you adjust the balance of the two microphone sources to create a sound that is just right for your voice. The nine-band graphic equalizer applies to each mic element independently. A clip-on cowlings enhances the response of both elements by minimizing aural interference. The solid aluminum die cast mic stand prevents sympathetic vibration. The central recessed control panel has been configured for ease of use. Check your voice in the headphones with the built-in record and playback feature. The built-in memory can store two different groups of settings for each microphone.

**MD-100 A8X**  
**\$CALL**  
HRO Price

This desk mic has selectable low-cut filtering and high-emphasis active filtering that allow you to tailor the microphone response for optimum voice clarity or DX punch. It has a large push-to-talk switch and latching button, along with a large rotary up/down, slow/fast control for scanning.



**MD-200 A8X**  
**\$CALL**  
HRO Price



Desk microphone designed for base station use with Yaesu's newest generation transceivers. Features a studio-quality polyethylene terephthalate film dynamic element. Provision for incorporating user supplied mike element with a switch to select between the standard and user element.

- The FTDX5000MP Limited robust and high-power final amplifier stage incorporates two super reliable FETs (VRF-150; drain-source voltage 170 V/gate source voltage  $\pm 40$  V, total device dissipation 300 W) in a push-pull configuration, offering a solid 200 W output (75 W class A operation).
- The FTDX 5000MP Limited radio has its own built-in power supply (110 / 220 VAC).
- Two (2) totally independent receivers give you performance and flexibility previously only provided by much more expensive radios.
- Super sharp "roofing" filters for VFO-A / main receiver. Filters are selectable between 300 Hz, 600 Hz, 3 kHz (6-pole crystal filter), 6 kHz, 15 kHz (4-pole MCF).
- Variable CW audio peak filter, and high/low-cut filtering created through the very latest in DSP technology. CW width: 50 / 100 / 150 / 200 / 250 / 300 / 350 / 400 / 450 / 500 Hz. CW pitch frequency: 300~1050 Hz (10 Hz steps).
- Three electroluminescent clear displays included for easier operation and control of the sub-frequency, graphical wave and menu function.
- 32-bit floating point DSP based on the TI TM-S320C6727B (@300 MHz), one EACH for VFO-A and VFO-B.
- True analog meter precision. Enjoy the huge size metering system and instant reaction time.
- IF output (9 MHz) from VFO-A/main receiver.
- Provides loads of practical level indication that clearly show settings of microphone gain / RF power / CW pitch / keyer speed / processor level / VOX delay time / break-in delay time.

## Valuable Options

- **SM-5000 Matching Station Monitor.** With the bandscope is a complete, enhanced stereo speaker system with superb audio quality.
- **Yaesu External Fully-Automatic Micro-Tuning Units.** Three modules available: A (160 m band), B (80 and 40 m bands), C (30 and 20 m bands)

Visit HRO  
on the web  
at  
[hamradio.com](http://hamradio.com)



**FT-DX1200**

### HF / 50 MHz 100 Watt Transceiver

Continuing the Yaesu "FT DX" Legacy of Excellence established decades ago, the FT DX 1200 is designed for the casual operator as well as the competitive operator, whether you primarily participate in contests, chase DX, or enjoy field operating. The high frequency design technology it has inherited ensures "Best in Class Performance."

The FT DX 1200 provides up to 100 Watts on SSB, CW, FM, and AM (25 Watts carrier) and a rugged state-of-the-art highly-balanced receiver circuit configuration for top performance on today's crowded bands. Similar to the high-end "Yaesu FT DX" series, it uses 32-bit high speed floating point DSP for renowned proven performance.

A built-in 4.3-in TFT wide full color high resolution display with loads of information provides superior operability and visibility for the FT DX 1200 user. A spectrum scope located just below the LCD display gives the operator all the information needed to be at the right place on the band with the right receiver set-up to have a satisfying experience with a casual QSO chat or while digging out a rare desired weak signal contact.

Optional accessories are offered to provide very desirable additional features that make the FT DX 1200 a flexible true high performance platform for all hams – no matter what mode they choose to operate.

- General coverage reception from 30 kHz to 56 MHz.
- FM and AM – wide and narrow modes included.
- The main tuning knob, made from machined aluminum, has the solid feeling of a large fly wheel, while being nimble and smooth in operation. Each user may set his / her favorite torque feeling of the main dial rotation.
- External control (CAT) is possible using the serial port or the optional SCU-17 USB interface unit. This feature means the FT DX 1200 can be remotely controlled from a distant location.
- High performance triple-conversion receiver circuit structure enables elimination of unwanted signals through filters at each stage as well as optimized gain distribution.
- QRM and QRN rejection using IF shift, IF width, contour, IF notch, or CW audio peak filter.
- Selectable roofing filters of 3 kHz, 6 kHz, and 15 kHz.
- Three IPO settings – best signal reception during changing band conditions.
- CW features include CW zero-in display, CW spot, full break-in, adjustable CW "VOX" delay, CW mode reversible, separate front and rear key jacks, built-in electronic keyer, 4 channel message memory.
- Two antenna inputs.
- Optional fully automatic  $\mu$ -tuning kit.
- Top performing receiver RF front end.
- Connected to a PC with a USB cable through the use of an optional SCU-17 interface.

**Yaesu now offers 3-year factory warranties.**

# HF TRANSCEIVERS



**FT-DX3000**

### HF / 50 MHz 100 Watt Transceiver

The FT DX 3000 is one of the long line of top-performing Yaesu FT DX transceivers. It inherits the design concepts of the FTdx5000 transceiver that has received high praise from all over the world by those pursuing the highest ideal of amateur HF communication equipment.

The FT DX 3000 exhibits phenomenal multi-signal characteristics first demonstrated in the top-rated FT DX 5000. Using the two signal dynamic range measuring method with 10 kHz signal separation, the FT DX 3000 performance is 108.5 dB, IP3 +37 dBm. With frequency separation of only 2 kHz between the desired signal and an interfering signal, the dynamic range measures 106 dB and IP3 +33 dBm.

With all its features and amazing performance at a truly affordable price, the FT DX 3000 is a terrific rig for home or a DXpedition.

### Yaesu's latest, with amazing receiver performance from its FT-DX5000 heritage

- Covers all amateur radio bands from 160 to 6 meters.
- General coverage reception from 30 kHz to 56 MHz.
- 100 Watt output on all bands.
- FM and AM wide and narrow modes.
- IF DSP for QRM rejection.
- High speed spectrum scope.
- AF scope display.
- RTTY / PSK31 encoder / decoder (optional).
- 3 antenna connectors.
- Built-in high-speed automatic antenna tuner included. The antenna tuner uses LC switching. It has a large capacity 100 channel memory; the tuning data is automatically memorized to reduce tuning time when changing frequency.
- USB interface equipped.
- Wide viewing angle 4.3" LCD display.
- Independent frequency display with wider viewing angle and higher contrast.
- Signal output for an external receiver and 9 MHz IF.
- USB input for firmware updates.
- IF width and IF shift functions.
- Fifteen separate band pass filters.
- 3 kHz roofing filter for SSB and 300 Hz (optional) and 600 Hz roofing filters for CW.
- "Contour" tailors the received audio signal without changing the bandwidth.
- IF notch has attenuation characteristics of 70 dB or more.
- Digital noise reduction by DSP.
- Many CW features including CW audio peak filter, CW decode, CW spot, Auto zero-in display, full break in, four message memory (50 characters each) automatic "beacon" keyer mode and separate key jacks on the front and rear panels.
- Effective QRM rejection is achieved using 32-bit high speed floating decimal point DSP. The signal is processed with the high speed 300 MHz clock frequency.
- Microphone amplifier with parametric equalizer.
- IF DSP speech processor.
- 5 digital voice messages. Each memory channel is capable of storing up to 20 seconds of audio using the optional DVS-6.
- Dimensions 14.4" x 4.5" x 12.3" (W x H x D) and weighs only 22 pounds.
- External control (CAT) is possible using USB or Serial Port; this feature means the FT DX 3000 can be remotely controlled.





## FT-991A Transceiver

HF / 50 MHz / VHF / UHF **C4FM FDMA Digital**

**\$CALL** – HRO Discount Price

The next-generation FT-991A now features a real-time spectrum scope and a multi-color waterfall display. The FT-991A operates on SSB, CW, AM, FM, packet, and system fusion C4FM digital. Whether you operate at home, mobile or in the field, the FT-991A will provide outstanding fundamental performance and invite expansion into a full-featured base station. Uncompromising receiver circuit ensures excellent performance from HF to VHF / UHF.

- Receive coverage 160 m through 70 cm.
- Transmits 100 W (HF), 50 W (2 m), 50 W (70 cm).
- 3.5 inch TFT full-color touch panel operation.
- High speed spectrum scope with automatic control built in.
- Roofing filter 3 kHz and 15 kHz.
- Triple conversion with 1st IF frequency of 69.450 MHz on all bands.
- High accuracy TCXO  $\pm 0.5$  ppm.
- Separate RF amps for best characteristic on each band.
- High resolution DDS and PLL local oscillator.
- 32 bit high speed floating point IF DSP.
- IF width and IF shift.
- Contour, DNR, IF Notch. APF for CW only.
- 160-6 m, high speed automatic antenna tuner.
- Full color TFT / LCD display. Four user defined function keys.
- Electronic keying with break-in support, electronic keyer weight control.
- Message memory function.
- 50 tone CTCSS encoder / decoder for FM operation.
- Compatible with optional ATAS-120 Active Antenna System.

**Yaesu now offers 3-year factory warranties.**

## FT-891

**HF / 50 MHz  
100 Watt  
Transceiver**

The FT-891 HF All Mode

Mobile Transceiver is in a compact package, providing uncompromised performance for both the mobile and

stationary Amateur operator. High end 32-Bit floating point DSP enhances the operating experience providing a cleaner, clearer signal and reducing overall operator fatigue creating a more enjoyable environment for any Amateur operator.



- Receiver coverage 30 kHz to 56 MHz.
- FM, AM, CW and SSB.
- 100 W SSB / CW / FM. 25 W AM.
- A native USB connection supports PC connectivity with a single cable, allowing for full rig control via a virtual serial port connection (VCP).
- Large transmit / receive indicator.
- Large diameter Main Tuning Dial (1.6" / 41mm) with torque adjustment.

- Three programmable front panel function keys.
- Pop-up menu for quick and easy navigation.
- Optional FC-50 antenna tuner.
- Compatible with optional ATAS-120 Active Antenna System.

**10m / 6m / 2m / 70cm FM**

## FT-8900R

**\$CALL** – HRO Price

The FT-8900 combines "traditional"

2m / 70cm local communications with the exciting capability of Sporadic-E or F2 DX on the 10m and 6m bands, allowing nationwide FM communication.



- Covers 28-29.7 / 50-54 / 108-180 / 320-480 MHz and 700-985 MHz (cellular blocked and non-restorable).
- Independent 2-channel, dual-receive, full duplex.
- High power output with 50 Watts on 10m / 6m / 2m and 35 on 70cm.
- Large, easy-to-read LCD display.
- Built-in duplexer.

- More than 800 memory channels. 799 "regular," 6 "home," 5 sets of band edge, and 6 "Hyper."
- Cross-band repeater capability.
- Versatile scanning.
- CTCSS / DCS built-in.
- User-programmable mike keys.
- Remote head mounting with optional YSK-8900.

## Yaesu HF Specifications

Model	Frequency Range	Power Supply		Current Drain		Power Output				Mike Z ohms	Receive Circuitry	Sensitivity†	RIT / XIT Range	Audio Output	HRO Price
		AC	DC	Xmit	Rec	AM	FM	SSB	CW						
FTDX1200	30 KHz-60 MHz		13.8 VDC	23 A	2.1 A	25 W	100 W	100 W	100 W	200-10K	Triple	< .16 $\mu$ V	$\pm 9.99$ kHz	2.5 W	CALL
FTDX5000 Series	30 KHz-60 MHz	90-264		5.5 A		50 W	200 W	200 W	200 W	200-10K	Triple	< .2 $\mu$ V	$\pm 9.99$ kHz	2.5 W	CALL
FTDX3000	31 KHz-60 MHz		13.8 VDC	23 A	2.1 A	25 W	100 W	100 W	100 W	200-10K	Double	< .2 $\mu$ V	$\pm 9.99$ kHz	2.5 W	CALL
FT-450D	30 KHz-56 MHz		13.8 VDC	22 A	1.5A	25 W	100 W	100 W	100 W	200-10K	Double	< .25 $\mu$ V	$\pm 9.99$ kHz	2.2W	CALL
FT-857D	See page 16		13.8 VDC	22 A	1 A	25 W 12.5 W 2m 5W 70cm	100 W 50 W 2m 20 W 70 cm	100 W 50 W 2m 20W 70 cm	100 W 50 W 2m 20 W 70 cm	200-10K	Double	< .2 $\mu$ V	$\pm 9.99$ kHz	2.5 W	CALL
FT-891	30 KHz-56 MHz		13.8 VDC	23 A	2.0 A	25 W	100 W	100 W	100 W	200-10K	Triple	< .158 $\mu$ V HF < 125 $\mu$ V 6m	$\pm 9.99$ kHz	2.5 W	CALL
FT-991A	See product description		13.8 VDC	23 A	2.2 A	2 - 25 W	100 W 50 W 2m 50W 70 cm	100 W 50 W 2m 50W 70 cm	100 W 50 W 2m 50 W 70 cm	200-10K	Triple	< .158 $\mu$ V HF < 125 $\mu$ V 6m < .111 $\mu$ V VHF.UHF	$\pm 9.99$ kHz	2.5 W	CALL

† Sensitivity measurements for 1.8-30 MHz SSB,CW

## The radio

### Compact HF + 6m Transceiver

#### FT-450D

#### \$CALL

HRO Discount Price

Now with  
DSP-2  
built-in



The Yaesu FT-450 provides world class performance in an easy to use, compact package. It employs state of the art IF DSP technology to bring an array of advanced features to the operator. Transmit frequency coverage includes 160 to 6 meters. The receive range is 30 kHz to 54 MHz. Power output is 100 Watts on HF and 6 meters. Operating modes include USB, LSB, CW, AM and FM.

- The rig is 9" W X 3.3" H X 8.5" D and weighs 7.9 pounds. Perfect for mobile or portable operation.
- Includes MH-31A8J hand mic, mic clip and DC power cord.
- Includes 10 kHz roofing filter right after the first mixer, providing narrow band selectivity protection of the IF & DSP stages – rarely found in rigs at this price.
- 400 MHz built-in IF DSP.
- Built-in electronic keyer.
- LCD multi-function display.
- Built-in TCXO  $\pm$  1ppm/hour (after warmup).
- AFC Fast-Slow-Auto-Off selection.
- Clarifier adjustment.
- Dedicated data jack for FSK-RTTY.
- CTCSS.
- User functions configurable by menu.
- Digital voice announcements of frequency, mode and S-meter.
- 500 regular memories and two voice memories.
- CW beacon function.
- Illuminated key buttons.

### 6 Watt HF / VHF / UHF Transceiver

All-Mode  
Portable

#### FT-818

#### \$CALL

HRO Discount Price



With SBR-32 MH 1900 mAh NiMH Battery and PA-48 Charger

- Fully self-contained battery-powered low-power amateur transceiver for portable, camping, or mountain use.
- Operates on 160-10 m, HF, 6 m, 2 m, and 70 cm bands.
- Operating modes: USB, LSB, CW, AM, FM, WFM, digital (AFSK), packet (1200 / 9600 FM).
- 208 memory channels / 10 memory groups.
- Improved frequency stability  $\pm$ 0.5 ppm: built-in TCXO-9.
- IF shift, IF noise blanker, IPO, ATT.
- CW "semi-break-in," CW reverse, CW pitch control.
- Built-in electronic keyer.
- ARS automatic repeater shift.
- Dual VFOs; split-frequency operation; IF shift; clarifier "R.I.T."; IF noise blanker; RF gain and squelch control; IPO (Intercept Point Optimization).
- Built-in CTCSS encoder/decoders.

### The Smallest HF + 6m + 2m + 70cm

Now with  
DSP-2 built-in

#### FT-857D

#### \$CALL

- HRO Discount Price



The power amplifier uses bipolar transistor devices for low noise, low distortion and high reliability. Has an extensive cooling system with a thermostatically-controlled fan and aluminium die cast chassis.

The receiver front-end has a very low noise floor and wide dynamic range. Features a double conversion superheterodyne system (single on WFM) with the second IF at 455 kHz; bandpass filtering, device selection and gain distribution for strong signals. On VHF and UHF, the very low noise MOSFET preamplifier and active DBM mixer aid in working weak signals and rejecting intermodulation. YSK-857 Separation Kit included with the radio.

- Receive coverage 100 kHz to 56 MHz, 76-108 MHz, 420-470 MHz. Includes 60m.
- Transmits 160-6 m, 144-148 MHz, 430-450 MHz and 5167.5 kHz (Alaska emergency frequency on USA version).
- SSB, CW, AM, FM, packet (1200 / 9600 bps) operation.
- Power out: 100 W (160-6 m), 50 W (2 m), 20 W (70 cm).
- DSP bandpass filter, DSP auto-notch filter.
- DSP noise reduction, microphone equalizer.
- VHF / UHF features: versatile antenna control selections, automatic repeater shift, Smart Search™, Spectrum Scope and ATS™.
- DXer features: IF shift, IF noise blanker, intercept point optimization, adjustable AGC, RIT, RF gain control, and VOX.
- Easy data mode for operation on 1200 / 9600 bps FM packet, RTTY, SSTV or PSK31. Rear panel 6-pin mini-DIN connector for each connection of these modes.
- CW features: built-in electronic keyer, CW message memory with beacon mode, CW pitch / sidetone control, and CW trainer.
- 200 main memories, 8 character alphanumeric labels. 10 groups with 20 memories each.
- Large multi-color display.
- Battery voltage meter, TX meter selection, two antenna connectors, versatile scanning features, auto power off, time out timer and CAT system.

#### Options include:

- **ATAS-120:** Active Tuning Antenna System for mobile, portable or apartment / balcony use. Designed for use on the 7 / 14 / 21 / 18 MHz amateur bands. Can be used fully retracted on the 50 / 144 / 430 MHz bands.
- **Collins® Mechanical Filters:**  
**YF-122S** 2.3 kHz SSB  
**YF-122C** 500Hz CW  
**YF-122CN** 300Hz CW
- **TCXO-9** High Stability Reference Oscillator.

### Programming Kits

#### To Program HF:

- ADMS-4AU-USB** FT-817
- ADMS-4BU-USB** FT-857/897
- ADMS-450-USB** FT-450D
- ADMS-991-USB** FT-991
- ADMS-DX1200-USB** FTdx1200
- ADMS-DX3000-USB** FTdx3000

Yaesu now  
offers 3-year  
factory  
warranties.



## Internet Linking Kit



### WIRES-X Internet Linking Kit \$CALL

HRO Discount Price

WIRES-X supports both Analog and the new C4FM digital radio communications modes. Yaesu's System Fusion, already the fastest growing Amateur Radio Digital System, is certain to see yet another pique in interest thanks to WIRES-X!

- WIRES-X allows communications between both C4FM digital stations and conventional FM stations via WIRES-X.
- High quality voice communication is achieved by repeating C4FM digital data as it is via the Internet.
- WIRES ID: Adopted a simple user ID system using alphanumeric characters.
- Smart Access: WIRES-X automatically connects to nodes and rooms by utilizing the Smart Access function. (Digital node station only).
- Preset Search: User can find local node station and receive their frequency setting data for automatic setup. (Digital node station only).
- Activity Monitor: IDs of active nodes and rooms can be searched from the C4FM transceiver via a local node. (Digital node station only).
- News Station: Stores and reads digital data such as text, images and audio data. (Digital node station only).
- Supports Analog FM mobile transceiver for Analog node station as well as Digital node station with FTM-400D.

## Programming Kits

### To Program Mobiles:

ADMS-2H-USB FT-8900  
ADMS-2900-USB FT-2900, FT-2980  
ADMS-7900-USB FT-7900  
ADMS-M100-USB FTM-100DR  
ADMS-M400-USB FTM-400DR

### To Program Handhelds:

ADMS-1J-USB FT-60R  
ADMS-FT2D-USB FT-2DR  
ADMS-FT25-USB FT-25R  
ADMS-FT65-USB FT-65R  
ADMS-FT70D-USB FT-70DR  
ADMS-VX6-USB VX-6R  
ADMS-270-USB FT-270

## HF Amp & Power Supply



### Quadra System \$CALL – HRO Price

Here's all the linear amplifier you should need for operation on both HF (160 - 15 meters) and 6 meters. It is designed for automatic band switching with the FT-450, FT-950, FT-2000, FT-1000D, FT-1000MP, FT-920, FT-990, FT-900, FT-991, FTdx1200, FTdx3000 and the FTdx5000 HF radios. The amp features 8 MRF150 power MOSFET transistors designed into 4 units of 2 transistors in a push-pull circuit at 48 VDC.

The included external power supply, the VP-1000, allows for easy installation. There are two input voltages, 117 VAC or 220 VAC. Output power is a function of the power supply voltages. At 220 VAC there is 1000 Watts out on HF and 500 Watts on 6 meters. At 117 VAC the output is 500 Watts on HF. The amplifier comes with a built-in high speed antenna tuner with four antenna outputs and two inputs. The multifunction omni-glow LCD display shows the status of the amplifier. There is automatic system monitoring with VSWR protection.

## Power Supplies



### FP-1030A

The FP-1030A is a regulated linear supply at 25 amps and includes meters.

### FP-1023A

The FP-1023A has 23 amps continuous and 25 intermittent. This low-profile switching power supply operates on 110 or 220 VAC.

\$CALL – HRO Prices

## 2m / 70 cm Mobiles

### 2 m / 70cm Dual Band C4FM FDMA Digital

#### FTM-100DR

\$CALL – HRO Price



The FTM-100DR VHF/UHF Dual Band Transceiver, an exciting new way to enter into Yaesu's revolutionary world of System Fusion C4FM Digital Communications.

- 50 Watts on both VHF and UHF.
- Highly visible and compact 160 x 40 pixel graphical dot-matrix display can be detached from the body of the radio and remotely mounted.
- Operates in three (3) Digital modes and one Analog mode.
- Automatic Mode Select (AMS) function that instantly detects the received signal mode.
- V/D Mode (Voice/Data simultaneous communication mode).
- Voice FR mode uses the full 12.5 kHz bandwidth to transmit digital voice data.
- Data FR mode uses the full 12.5 kHz bandwidth for data communication.
- Analog FM is effective when weak signal strength causes audio drop out in the digital mode, and enables communication up to the borderline of the noise level.

### 2 m / 70 cm Dual Band

### C4FM FDMA Digital

#### FTM-400XDR

\$CALL – HRO Price



Operate on 2 m and 70 cm with this mobile transceiver. Select power of 50, 20, or 5 Watts on either band. Enjoy wideband receive from 108-470 and 800-999 MHz (less cellular). Four scan modes: VFO, memory, programmable memory, or selected memory. Each memory can store frequency, mode, tag, repeater information, tone, DCS, antenna squelch information, memory skip information, and transmission output. Set the screen background to any of 5 colors (green, blue, orange, purple or gray). Capture images and video by connecting a USB camera (not supplied) and transmit and receive them. There is a port for a microSD card.

- Transmit bands - 2 m / 70 cm.
- Double conversion receiver; twin RX.
- Large color display.
- 500 memories per band.
- Internal clock / calendar.
- Image receive / transmit.
- Enhanced GPS / APRS®.
- 1000 memories in 2 banks; four scan modes.
- Band scope; spectrum scope.
- ARTS™ and optional Bluetooth®.
- Optional voice guide speaks operating frequency and records received signals.

## The radio

### FT-2980R 2 meters \$CALL — HRO Price

144 MHz 80 Watt FM mobile transceiver - 3 Watts of RX audio, with an MH-48A6JA DTMF microphone.



As its model name suggests, the new FT-2980R arrives with the solid feature configuration and mechanical toughness of the ever popular FT-2900R, with even more output power now at 80 Watts!

The FT-2980R four output power settings: 80 W, 30 W, 10 W and 5 W are selectable, allowing each user to choose the power they want for their operating style and situations. A massive heatsink guarantees a solid 80 Watts of RF power with no cooling fan needed. Thanks to a loud 3 Watts of audio output, the operator can enjoy CLEAR reception, even in noisy environments.

Other useful functions included are: Alphanumeric channel display; 200 memory channels; CTCSS and DCS encode/decode built-in; versatile scanning capability; wide/narrow deviation selection, interactive programming menu..

- Frequency range: Transmit: 144 - 148 MHz; Receive: 136 - 174 MHz.
- Double conversion superheterodyne.
- Modulation Type: F3E (FM), F2D (PACKET).
- 3-year warranty.
- CTCSS and DCS encode / decode.

- Versatile scanning capability.
- WX channels with "severe weather" alert.
- Smart search operation.
- Wide / narrow deviation selection.
- Interactive programming menu.
- RF-squelch.
- Supply voltage display.
- 4-level display dimmer.

## Radio Cooling

### SMB-201



Picture shown includes body of radio attached [radio not included].

With so many ways to enjoy Amateur Radio such as WIRES-X and packet operation, transceivers now deal with increased levels of heat generated by higher duty-cycle load of digital modes. Yaesu developed the SMB-201 especially for radio operators who use mobiles at their desk.

It is compatible with nearly all Yaesu VHF / UHF dual-band transceivers:

**FTM-100DR**  
**FTM-400XDR**  
**FT-8900R**  
**FT-8800R**  
**FT-7900R**

Includes SAD-11B AC adapter.  
HRO Price \$CALL

## Speakers



### MLS-200-M10

Yaesu's external speaker matches the impedance and output requirements of most Yaesu transceivers. The waterproof (IP55) speaker has 4Ω impedance. Maximum power input: 12 W. The speaker works in stereo with the FTM-350, FTM-400, FTM-10 radios. Comes with 3-meter cable with 3.5 mm standard 3-contact miniature phone plug. **HRO Price \$38.95**



### MLS-100

This high-performance communications speaker matches the impedance and output requirements of most Yaesu transceivers. It mounts on a swivel stand that is supplied along with mounting screws and bolts. A 6.5 foot (2 m) audio cable that terminates in a 3.5 mm mono mini plug is also supplied. **HRO Price \$44.95**

# 2 m MOBILES



## Analog FM 2-meter Transceiver

### FTM-3100DR \$CALL — HRO Price

The FTM-3100R is a ruggedly built yet compact VHF-FM mobile transceiver, providing high output power of up to 65 Watts. One of the distinguishing features of this mobile transceiver is the Front Panel Speaker delivering 3 Watts of loud and crystal clear audio.

- Frequency Range: Transmit: 144 - 148 MHz, Receive: 136 - 174 MHz.
- Double Conversion Superheterodyne.
- 220 Alpha-Numeric Memory Channels.
- 3-Year Warranty.
- CTCSS and DCS Encode/Decode.
- High Stability TCXO ±2.5 ppm).
- Severe Weather Alert.
- DTMF Microphone MH-48A6JA.
- Sensitivity 0.20uV (HAM Wide), 0.22uV (HAM Narrow).
- Output Power: 65 / 30 / 5 W.



## 2 m 65 W C4FM / FM Digital Transceiver

### FTM-3200DR \$CALL — HRO Price

This rugged yet compact C4FM / FM VHF mobile transceiver, provides output power up to 65 Watts.

- Modulation modes: C4FM digital (V/D mode, VFR mode, DFR mode), FM analog.
- AMS (automatic mode select) function automatically recognizes the signal as C4FM digital or conventional FM.
- Front panel speaker with 3 W of audio output.
- Digital GM (group monitor) function.
- 3-Year Warranty.

- Voice / data simultaneous communication mode.
- Bright multi-colored LED mode / status indicator shows the transceivers' status.
- Illuminated microphone with direct frequency entry.
- 220 memory channels with alpha-numeric tags (maximum 8 characters).
- CTCSS / DCS encode / decode with split tone and DCS encode-only capability.

**Yaesu now offers 3-year  
factory warranties.**





**FTM-7250D**  
**C4FM / FM DIGITAL**  
**Dual Band 2 M / 70 cm Mobile**  
**\$CALL** – HRO Discount Price

- 50 Watts for high power transmit with FACC (funnel air-convection conductor – wind tunnel) cooling.
- 3 Watts powerful and clear audio with a front facing speaker.
- Large LED with AMS / mode indicators.
- System fusion II compatible with sophisticated digital group – ID (DG-ID) operation.
- C4FM and conventional FM operation.



**FTM-3207**  
**C4FM / FM DIGITAL**  
**70 cm Mobile**  
**\$CALL** – HRO Discount Price

This UHF mobile radio has a receive frequency range of 420-470MHz and a transmit range of 430-450 MHz. It has selectable output power of 55 W / 25 W / 5 W. It comes with the 48A6JA DTMF microphone, USB cable and mounting bracket.

- Advanced digital C4FM operation.
- System fusion compatible.
- AMS (Automatic Mode Select) function automatically recognizes the signal as C4FM digital or conventional FM.
- Sophisticated digital-group-ID operation.
- 221 memory channels with alpha-numeric tags.
- Three-Watt front-facing speaker.

## Yaesu HT Accessories

HANDHELD ACCESSORIES	Model	60R	25R 65R	270R	FT-4XR FT-4VR	VX-6R	FT-2DR	HRO Discount Price
Microphone Adapter	CT-44	*					*	\$16.95
Microphone Adapter	CT-91			*		*		\$17.95
VOX Headset	SSM-64A			*		*		\$59.95
VOX Headset	SSM-63A	*					*	\$69.95
VOX Earpiece Microphone	SSM-512B		*					\$29.95
Speaker/Microphone	MH-34B4B	*					*	\$31.95
Speaker/Microphone	MH-57A4B			*		*		\$27.95
Speaker/Microphone	MH-73A4B			*		*		\$47.95
Compact Speaker/Microphone	SSM-16B				*			\$24.95
Camera/Microphone	MH-85A11U						*	\$134.95
Ear Piece Microphone	SSM-55A			*		*		\$39.95
Ear Piece Microphone	SSM-57A	*					*	\$34.95
VOX Ear Piece Microphone	SSM-512B				*			\$29.95
DC/DC cigar adapter	SDD-13	*	*			*	*	\$27.95
DC/DC adapter	EDC-6	*		*		*	*	\$8.95
Wall Charger	SAD-11B	*				*	*	\$29.95
Wall Charger 117 VAC	PA-48B	*		*		*	*	\$28.95
Slow Wall Charger	SAD-18B						*	\$24.95
AC Adapter	SAD-20		*					\$19.95
Rapid Charger	CD-15A					*		\$39.95
Charger Cradle	SBH-13	*						\$23.95
Rapid Charger	SBH-22		*		*			\$19.95
Charger Cradle	CD-26			*				\$25.95
Charger Cradle	CD-41						*	\$37.95
Desk Top Rapid Charger	VAC-370	*		*				\$74.95
Battery 1400 mAh	FNB-80LI					*		\$74.95
Battery 1000 mAh	FNB-82LI							\$32.95
Battery 1300 mAh 7.4 V	FNB-83	*		*				\$35.95
Battery 1100 mAh 7.4 V	FNB-101LI						*	\$52.95
Lithium ion 2200mAh	SBR-14LI						*	\$79.95
Lithium ion 1950mAh	SBR-25LI		*					\$34.95
Lithium ion 1950mAh	SBR-26LI		*					\$44.95
Lithium ion 1750mAh 7.4 V	SBR-28LI				*			\$35.95
Battery case AA batteries	FBA-23					*		\$29.95
Battery case AA batteries	FBA-25	*		*				\$18.95
Battery case AA batteries	FBA-39						*	\$31.95
Cloning Cable	CT-27	*						\$14.95
Cloning Cable	CT-168						*	\$24.95
Cloning Cable	SCU-36		*	*				\$19.95
Programming Cable	SCU-35		*	*				\$19.95
Data Cable(Dsub>9 pin)	CT-169						*	\$36.95
Data Cable(11 pin>2.5)	CT-170						*	\$29.95
Data Cable(2.5>2.5)	CT-176						*	\$24.95
PC Connection Cable (USB)	SCU-19						*	\$79.95
Ant Adapt SMA - BNC	CN-3	*		*		*	*	\$8.95
Radio Case (soft)	CSC-91					*		\$16.95
Soft Carry Case	SHC-24						*	\$19.95

## Yaesu Handhelds

Model	Frequency	Mode	Pwr Supply	Power Out	Current Transmit	Drain Receive	Sensitivity	Height in (cm)	Width in (cm)	Depth in (cm)	Weight oz (g)	HRO Price
FT-60R	2m/70 cm	FM	7.2 VDC	5 W	1.5 A	125mA	.16 $\mu$ V / 12dB	4.3 (10.9)	2.3 (5.8)	1.2 (3.0)	13.5(370)	CALL
FT-65R	2m/70 cm	FM	7.4 VDC	5/2.5/0.5 W	1.5A/1.7A	205mA	.2 $\mu$ V / 12dB	4.1 ( 10.4)	2.5 (5.2)	1.2 (3.0)	9.17(260))	CALL
FT-4VR	2m	FM	7.4 VDC	5/2.5/0.5 W	1.5A	190mA	.2 $\mu$ V / 12dB	3.5(9.0)	2.1(5.2)	1.2(3.0)	8.82(250)	CALL
FT-4XR	2m/70 cm	FM	7.4 VDC	5/2.5/0.5 W	1.5A/1.7A	190mA	.2 $\mu$ V / 12dB	3.5(9.0)	2.1(5.2)	1.2(3.0)	8.82(250)	CALL
VX-6R	2m/70 cm @#	FM	7.4 VDC	5 W	1.5/1.6/1.8 A	150mA	.16 $\mu$ V / 12dB	3.4 (8.7)	2.3 (5.8)	1.1 (2.8)	9.5(270)	CALL
FT-2DR	2m/70 cm	FM/AM	7.4 VDC	5 W	1.7 A	240mA	.16 $\mu$ V / 12dB	4.3 (10.9)	2.4 (6.2)	1.2 (3.2)	10.9(310)	CALL
FT-25R	2m	FM	7.4 VDC	5/2.5/0.5 W	1.5 A	205mA	.2 $\mu$ V / 12dB	4.1 ( 10.4)	2.5 (5.2)	1.2 (3.0)	9.17(260))	CALL
FT-70DR	2m/70 cm #	FM	7.4 VDC	5/2/0.5 W	1.6 A	180mA	.16 $\mu$ V / 12dB	2.36(6.0)	3.86(9.8)	1.3(3.3)	8.99(255)	CALL
FT-270R	144-148 MHz#	FM	7.2 VDC	5 W	1.5 A	165mA	.16 $\mu$ V / 12dB	4.7 (12.0)	2.4 (6.0)	1.3 (3.2)	13.8 (390)	CALL

\*Power output can be increased depending on the battery pack selected. #Extended Rx range @Cell phone blocked. \*\*2 and 6m 4.5 W UHF.  
 †1.5 W 2m/1 W UHF. \*\*\*1.5 W on 220 MHz

### FT-2DR 2 m / 70 cm C4FM FDMA Digital \$CALL HRO Discount Price

The FT-2DR backlit touch panel display provides a high level of on-screen visibility for the operator. It has Yaesu's AMS capability to recognize either digital or FM analog signals.




- 5 Watts out at 7.4 VDC.
- System Fusion.
- C4FM digital V/D mode, voice FR mode, data FR mode and regular FM.
- 700 mW audio.
- Snapshot function with image data display on LCD and transmitting image data capability.
- Built-in high sensitivity 66 channel GPS with antenna.
- Backtrack function to return to starting point.
- Smart navigation.
- 1245 memory channels.
- AF dual monitor capability.
- Wideband receive capability 0.5 - 999 MHz (USA cellular blocked).
- 1200 bps 9600 bps APRS built-in.
- Has micro SD card slot with GPS logging.
- High capacity lithium-ion battery.



### FT-60R 2 m 70 cm

**Extensive  
Receive  
Frequency  
Coverage**

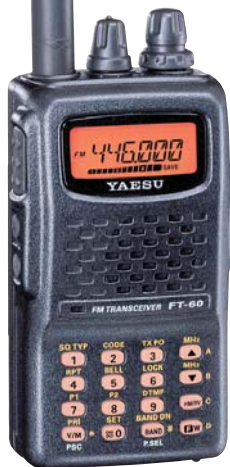

### Emergency Automatic ID for Search & Rescue

Receives 108-520 MHz and 700-999 MHz (cellular blocked) for monitoring amateur, public safety, business, marine, aircraft, government communications.

- Tough die-cast, water resistant construction.
- 1000 memories w/alphanumeric labels.
- 5 Watt output.
- CTCSS and DCS (encode/decode) with split tone; DCS encode only capable.
- ARTS™.
- One-touch to NOAA.
- Nine DTMF auto-dial memories.
- WIRES™ Internet linking.
- Huge LCD display.
- Two front panel programmable keys.
- Automatic repeater shift.

### FT-70DR 2 m / 70 cm C4FM FDMA Digital

The new FT-70DR is the compact and very attractively priced Yaesu System Fusion transceiver with both conventional FM operation and the advanced C4FM digital mode.

The FT-70DR provides up to 5W of reliable RF power, and its large front speaker delivers 700 mW loud audio output. C4FM has better BER (Bit Error Rate) characteristics than other digital modulations, and thanks to it, the audio quality is exceptional.

The new digital FT-70DR naturally utilizes the automatic mode select (AMS) function. AMS detects the operating mode of the received signal as C4FM digital or FM analog, and automatically and instantly switches the receiver to the appropriate mode. Users do not need to manually change between modes.

Multi-colored LED mode-indicator equipped on its front case also assists an operator to enable hassle-free operation with AMS. This indicator clearly and visibly shows the transmit / receive mode by changing its color, and the operating mode of the transceiver is easily recognized at a glance.



Another distinguishing feature of the FT-70DR is digital group monitor (GM) with DG-ID and DP-ID. DG-ID (Digital Group Identification) and DP-ID (Digital Personal Identification) are the useful features newly included in the FT-70DR to simplify the GM operation. Very simply, the transceivers selecting the same DG-ID or DP-ID can communicate, but not others. Between 00 and 99 DG-ID and DP-ID are selectable, and users can enjoy group communication with friends in GM mode according to their operation needs.

Other included standard features and functions are; IP54 rating (dust / water protection) construction, wide band receive coverage of 108 - 579.995 MHz, versatile scanning capabilities such as programmable VFO scan, memory scan, and priority channel scan, external DC jack for DC supply operation and battery charge, mini USB port for convenient memory management and software updates, CTCSS/ DCS operation, automatic power off (APO) feature, RF squelch, transmitter time out timer (TOT) and busy channel lock-out (BCLO).

- System Fusion compatible.
- 700 mW audio output.
- Wide band receive coverage of 108 - 579.995 MHz.
- 1,105 channel memory.
- CTCSS / DCS operation.
- Large multi-color mode indicator.
- Versatile scanning capabilities (programmable VFO, memories, & priority channel scans).
- 7.4 V 1,800 mAh Lithium Ion battery pack (SBR-24LI) included.
- WX channels with "severe weather" alert (US version).

- RF Squelch.
- Mini USB port for memory management and software updates.
- Transceiver-to-transceiver cloning with optional cloning cable (CT-27).
- Automatic power-off feature, RF squelch, transmitter time out timer, and busy channel lock-out.
- IP54 rating (dust / water protection) construction.
- Equipped with mini USB port for convenient memory management & software updates.





**FT-4XR**  
**2 m / 70 cm**  
**\$CALL**  
HRO Discount Price

**FT-4VR**  
**2 meter**  
**\$CALL**  
HRO Discount Price



The FT-4XR (Dual Band VHF/UHF) and the FT-4VR (Single Band VHF) share the same core feature set and are identical in appearance.

The FT-4XR & FT-4VR are the ultimate in compact designed (W 2.1" x H 3.5" x D 1.2") handheld transceivers, providing up to 5 W of stable and reliable output power thanks to Yaesu's integration of highly-efficient Bridged Transless (BTL) amplifier technology.

Both rugged handheld transceivers have 1.4-inch front speakers that deliver 1W of powerful clear and crisp intelligible audio.

- Three selectable TX power settings: 5 W (high) / 2.5 W (middle) / 0.5 W (low).
- More than 15 hours operating time with supplied 1,750 mAh Li-ion Battery pack.
- Large-capacity 200 memory channels.
- Selectable frequency steps (5 / 10 / 12.5 / 15 / 20 / 25 / 50 / 100 kHz).
- WX channels with "severe weather" alert.
- PC programmable with optional programming cable (SCU-35).
- Transceiver-to-transceiver cloning with optional cloning cable (SCU-36).



**FT-65R**  
**Dual Band**  
**\$CALL**  
HRO Discount Price



**FT-25R**  
**2 meter**  
**\$CALL**  
HRO Discount Price

These handheld transceivers share the same set of features and are identical in appearance but they have different operating frequency range coverage.

- Selectable output power settings - 5 W / 2.5 W and 0.5 W.
- Speaker provides 1 Watt audio input.
- Supplied 1950 mAh Li-ion battery pack provides more than nine (9) hours operation. Optional higher capacity 2500 mAh Li-ion battery pack provides more than 11.5 hours of operation.
- LED displays.
- Four (4) quick recall keys (QRK) are individually user-programmable to store and recall favorite frequency settings and to be used as short-cut keys to set mode menu items.
- White LED flashlight.
- Programmed VFO scan, memory scan, priority channel scan, weather alert scan.
- WX channels with "severe weather" alert (US Version).
- VOX operation.
- FM broadcast receiver.
- ARTS (automatic range transponder system).
- DTMF operation - CTCSS / DCS operation.
- Busy channel lock-out.
- Battery saver function.
- Automatic power-off.
- Transmitter time-out-timer.



**FT-270R**  
**2 meter**  
**\$CALL**  
HRO Discount Price

The FT-270R is a compact, high-performance FM hand-held providing up to 5 Watts of RF power, along with big audio output (800 mW). Protected against water ingress to IPX7 specifications (submersion for up to 30 minutes at a depth of 3 feet). Features long operating time using the supplied 1400 mAh NiMH battery pack. 16-key direct keyboard frequency entry and direct DTMF input with quick, one-touch access to Yaesu's WiRES-II™ VoIP Internet linking system!

- TX: 144-148 MHz; RX: 136-174 MHz.
- 5 Watts with power levels hi/ med/ low.
- ARTS™ System.
- Automatic repeater shift.
- 200 memory channels.
- Ten memory banks for channel allocation.
- CTCSS / DCS included.
- Smart Search™ memories.
- Ten memory banks for channel allocation.
- Adjustable TX deviation level.
- RF Squelch.
- Battery voltage display.



**VX-6R**  
**2 m**  
**220 MHz**  
**70 cm**  
**\$CALL**  
HRO Discount Price

The VX-6R is both rugged and submersible (JIS7: 30 minutes of submersion at depth of 3 feet).

- Covers 504 kHz to 998.99 MHz (with cell blocked).
- 5 Watts of power 144 and 440 MHz bands; 1.5 W on 222 MHz.
- One-touch memory access.
- FNB-80LI 1400 mAh lithium-ion battery pack standard.
- Emergency automatic ID.
- Security password.
- CW trainer.
- Enhanced paging and code squelch (EPCS).
- Wake-up battery saver.
- 900 memories with alpha-numeric labels.
- Compact: measures just 2.3" x 3.5" x 1.1" WHD.
- Oversized volume and squelch knobs.

**Call for  
Quotes**



**BCD-536HP**  
**TrunkTracker V Mobile**  
**\$599.95** – HRO Price

- APCO 25 Phase I / II.
- Motorola, EDACS, LTR trunking.
- HomePatrol operation.
- WiFi Link for remote operation.
- USA / Canada radio database.
- Zip Code selection.
- Fire tone-out alert.
- Temporary avoid.
- CloseCall® RF capture.
- System channel / number tagging.
- DCS/CTCSS rapid decode.
- Audio AGC.
- S.A.M.E weather alert.
- Backlit keypad & LCD.
- 4 GB memory.
- Enhanced dynamic memory.
- USB connectivity.
- PC programming and cloning.
- Covers 25-512, 758-824, 849-869, 894-960, 1240-1300 MHz.
- Includes antenna, DC adapter, USB cable, three-wire harness, mounting bracket and hardware.

## Mobile Trunking Scanner with GPS Support and APCO-25



**BCD-996P2** **\$449.95** – HRO Price

- 25,000 dynamically allocated channels.
- Location-based scanning.
- TrunkTracker V.
- APCO 25 Phase I & II.
- Links to optional GPS.
- Dual color display.
- Multi-site trunking support.
- Temporary lockout.
- Dangerous crossing or road and POI alert.
- DIN-E mounting.
- Close-Call™ RF capture technology.
- Public safety scanner.
- PC control/programming (free download).
- USB connector.

## BearTracker Mobile Trunking Scanner with GPS Support



**BC-T15X** **\$189.95** – HRO Price

- Frequency coverage 25-512, 758-960 (cell band blocked), 1240-1300 MHz.
- 2500 dynamically allocated channels.
- Up to 400 systems.
- Location-based scan.
- TrunkTracker III.
- 100 system quick keys.
- BearTracker™ warning system.
- Close Call™ RF capture technology.
- Dangerous crossing, dangerous road and POI alert.
- Public safety scanner.

## Handheld Scanners



**BCD-436HP**  
**TrunkTracker V**  
**Handheld**  
**\$499.95**  
HRO Price

- APCO 25 Phase I / II.
- HomePatrol operation.
- 4 GB memory.
- USB connectivity.
- CloseCall® RF capture.
- Audio AGC.
- S.A.M.E weather alert.
- Backlit keypad & LCD.
- Motorola, EDACS, LTR trunking.
- USA/Canada radio database.
- Enhanced dynamic memory.
- System channel / number tagging.
- DCS/CTCSS rapid decode.
- PC programming and cloning.
- Covers 25-512, 758-824, 849-869, 894-960, 1240-1300 MHz.
- Includes antenna, USB adapter, 3AA NiMH batteries, hand strap, SMA-BNC antenna adapter.



**NEW!**  
**SDS-100**  
**I/Q Scanner**  
**With**  
**Software**  
**Defined**  
**Radio**  
**Technology**  
**\$649.99**  
HRO Price

Uniden has created the first scanner to incorporate Software Defined Radio technology. The SDS100's digital performance is better than any other scanner in both simulcast and weak-signal environments.

This is the first scanner that allows you to decide what to display, where, and in what color. Custom fields put the information important to you right where you need it.

Of course, the SDS100 also includes all the advanced features you've come to expect from a Uniden scanner: TrunkTracker X, weather alerts, APCO P25 Phase I and II, location-based scanning, and USA / Canada radio database. It meets JIS4 (IPX4) standards for water resistance.

**More info @**  
**[www.hamradio.com](http://www.hamradio.com)**

## Mobile Scanner

**Home Patrol II**  
**\$699.95** – HRO Price

- Digital touch screen scanner.
- USA & Canada database.
- APCO Project 25 Phase I & II.
- USB-source charging.
- No subscription.
- Simple programming
- Enter your zip code to select channels in your area.
- 3.5" daylight viewable display.
- Sentinel Windows PC software included.
- S.A.M.E. emergency / weather alert.
- TrunkTracker IV.
- Monitor public safety, local government, amateur radio operators, and more.







# SWL / SCANNER ANTENNAS

## WHISTLER

### TRX-1 Adaptive Digital Trunking Handheld Scanner

HRO Price \$549.95



The TRX-1 handheld multi-system adaptive digital trunking scanner with Motorola P25 Phase I, X2-TDMA, Phase II and DMR. It can monitor the following unencrypted channels / systems:

- Conventional DMR (Entered as a DMR trunked system).
- Hytera XPT.
- MotoTRBO™ Capacity Plus.
- MotoTRBO™ Connect Plus.
- MotoTRBO™ Linked Cap Plus systems.
- Backlit alphanumeric keypad.
- All USA / Canadian services and frequencies are pre-programmed on the included SD card.
- Upgradeable CPU, DSP, and library.
- Store favorite scanlists.
- EZ scan PC software.
- IF / discriminator output.
- Permits recording by scannable object and saves into a Windows compatible audio file.
- Clock and calendar functions.
- Dedicated SKYWARN® / Weather button.
- Spectrum sweeper.
- Programmable audio and visual alert system.

### TRX-2 Adaptive Digital Trunking Mobile Scanner

HRO Price \$629.95




A multi-system adaptive digital trunking scanner with Motorola P25 Phase I, X2-TDMA, Phase II and DMR, making it capable of monitoring the same unencrypted channels/systems as the TRX-1. The scanner features are same as for the TRX-1.

Development of NXDN monitoring is underway by Whistler and the TRX-1 (Handheld) and TRX-2 (Desktop/Mobile) will include NXDN as a FREE upgrade when available.

## SWL Antennas

### ALPHA DELTA

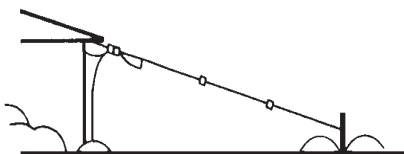

#### DX-SWL

The DX-SWL is tuned for the most popular SWL bands (13, 16, 18, 19, 21, 25, 31, 41, 49, 90 and 120 meters). It can be used as a multi-band transmit antenna with the appropriate antenna tuner. Length is 60 feet. Requires a single support. Standard coax connects antenna to your radio. Feed point is 50 ohms. SO-239 connection. **HRO Price \$124.95**

#### DX-ULTRA

The multi-element DX-ULTRA has extremely low-noise performance. Tapered wing design allows broadband operation. Configure as dipole, inverted vee, or sloper. Covers MW, tropical, SW, government, military, embassy, maritime, aircraft, and commercial frequencies. 80 feet long. Made with ISO-RES inductors and parallel wire elements. Uses the Delta-C center insulator, Delta-CIN end insulators, and 12 gauge solid copper wire with grey PVC insulation. Elements are separated by grey PVC rod. **HRO Price \$159.95**

## Discone Antennas



### MFJ

#### MFJ-1868


Ultra wide-band antenna receives 25-1300 MHz. Perfect for scanners. Transmit 50-1300 MHz. Handles 200 W. Ideal for 2 / 6 meters, 220 / 440 MHz.

Includes SO-239 connector, 50' coax, stainless steel elements and mounting hardware.

### DIAMOND ANTENNA


#### D-130J / D-130NJ Super Wideband Discone

Monitor 25-1300 MHz. Transmit on 50, 144, 430, 1200 MHz. All stainless steel. Input power 200 Watts maximum. Impedance: 50 ohms. VSWR: 1.5:1. Length: 1.7 meters. Mounts on 1" to 2" masts. D-130 UHF and D-130NJ Type-N connector. **HRO Prices: D-130J \$94.95, D-130NJ \$95.95**



## Log Periodic

### CREATE

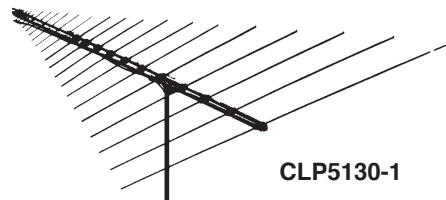

#### CLP5130-1

The CLP5130 antennas are high gain, wide band VHF/UHF log periodic beams for horizontally polarized base station use. Covers amateur bands from 50-1300 MHz, FM broadcasting, scanning, VHF / UHF TV, air band communications, government and business bands.

Forward gain is 10 to 12 dB – 10 to 16 times the gain of a nondirectional discone type antenna. The VSWR is less than 2.0:1 across the band. The high-quality aluminum antennas have a boom design that allows movement of the phasing line. Distortions in the vertical and horizontal planes are minimized and element adjustment is not necessary. The boom-to-mast bracket is made of a lightweight and rugged magnesium alloy.

## Create Antennas

	CLP 5130-1	CLP 5130-2
Frequency	50-1300 MHz	108-1300 MHz
No. Elements	23	19
Power PEP	500W	500W
Forward Gain	10-12 dBi	10-12 dBi
Front/Back	15 db	15 db
Longest element	9' 10"	4' 6"
Boom length	5' 9"	4' 6"
HRO Price	\$459.95	\$369.95

## Wideband Mobile

### SCANNER MASTER

#### Spectrum Force Mag Mount Mobile

This wideband antenna comes with a BNC or SMA connector. Covers 25-1300MHz. Height is 17" including base. BNC fits most scanners.

**HRO Price \$19.95 / BNC**  
**HRO Price \$19.95 / SMA**





## Executive Satellite \$199.95.95 HRO Price Five Decades of Excellence

The Satellit series keeps getting better and better. The latest arrival, the Etón Satellit, is no exception. This latest innovation delivers the best performance in radio reception and audio quality and it's got the looks and style to match. The Executive Satellit receives every radio wavelength—AM (MW), FM with RDS, LW, and Shortwave (SW). Plus, it also receives VHF aircraft band, single sideband (SSB) and includes a PLL tuner so your AM signal is strong and clear. It has a leather case with craftsman stitching for ultimate portability.

- The sync detector improves sound quality by lowering distortion and fading. It's sensitive to pick up weaker signals.
- RDS for FM shows you the station's call letters, style of music, song title, artist and more.
- Uses DSP technology to enhance sensitivity and selectivity.
- 360 degree rotating AM antenna.
- Auto / manual / direct frequency key-in and station memory tuning.
- Mute function.
- 12K AM output socket.
- Auto tuning storage function (ATS) for FM / AM / shortwave.
- 1000 station memories (each band 100 memories, 500 customizable).
- External antenna jacks for both AM and FM.
- Headphone jack. Connect any audio device using the line input.
- Line out socket (transfer radio broadcasting to other devices).
- It features local and world time settings, radio and buzzer alarm clock settings, sleep timer, and time backup. The bright orange LCD display with backlighting makes it easy to keep time...in any zone.
- Dual alarm clock.
- USB (5 V) outlet for MP3 or mobile phone charging function.
- AC/DC 6V power supply included.
- Plug in the AC adapter (included) for full power or use 4 AA batteries (sold separately). The battery strength indicator on the display will let you know when it's time for a change.



## Field BT 129.95 HRO Price

### AM / FM / Shortwave Radio

Field-BT receives almost every radio wavelength—AM (MW), FM, and Shortwave (SW)—at home or abroad. And it's easy to set the station spacing and frequency so your stations come in loud and clear wherever you are.

- High sensitivity, strong anti-interference, low background noise, and even lower distortion.
- Wide/narrow bandwidth selection improves audio fidelity and minimizes noise. Listen out loud or plug in your favorite headphones.
- The Radio Data System (RDS) enables FM broadcasters to deliver more than just an analog audio signal, but also digital data like the station's call letters, style of music, song title, artist and more.
- Local and world time settings, radio and buzzer alarm clock settings, sleep timer and snooze light
- Use 4 D batteries (not included) or plug in the supplied AC adapter into the DC jack.

## FRX5-BT \$94.95 – HRO Price All-Purpose Quad Power Radio



Need a radio that's rugged, rechargeable, and reliable, not to mention solar-powered, splashproof and smart-phone and tablet charging? The FRX5-BT is just the ticket. With a rechargeable lithium battery, super-duper solar panel and hand crank power generator, it's an essential tool for use at home or away.

Stay up to date with this AM / FM digital radio with display and alarm clock. There's an AUX-input to play your own tunes. And, to listen alone, just plug in your favorite headphones.

The FRX5-BT powers up in four ways—via solar panel, hand crank, built-in rechargeable lithium battery, or alkaline batteries. The solar panel will charge the battery fully in 5-6 hours. Crank the hand

turbine for four minutes and you'll produce enough power for 10-15 minutes of music and weather or one minute of talk time. Use the micro-USB cable to charge the built-in rechargeable battery. To charge your smartphone or tablet, plug it into the 5V 2.1A USB port. Power will automatically "dump charge" to your device, just like plugging into the wall. The FRX5-BT will fully charge most smartphones once.

Shine the bright LED flashlight to find your way. Use the glow-in-the-dark locator and illuminated buttons at night. And for big-time emergencies, flash the red emergency beacon.

## Tunable Passive AM Radio Loop Antenna 520 KHz -1,510 KHz

### AN-200

\$24.95 – HRO Price




Use with external antenna capable radios. Plug the AN200 into the antenna input of your radio or place loop as close to the sound system as possible for better reception. First, tune the radio frequency, then fine-tune by adjusting the control knob on the AN200. Move the loop around to find the best reception. 8.5" x 2.9" x 10.25" (W x H x D)

## Scanner Books

### Two-Way Radios & Scanners for Dummies

HRO Price \$21.99

**HRO stocks many books with frequencies for localities around the country. Contact your nearest HRO for details.**







# SDRplay



## SDRduo Dual Tuner 14-bit SDR

**\$279.95** HRO Discount Price

The SDRplay RSPduo is a dual-tuner wideband full featured 14-bit SDR which covers the entire RF spectrum from 1 kHz to 2 GHz giving 10 MHz of spectrum visibility. Combined with the power of SDRUno software for Windows, you can simultaneously monitor two completely separate 2 MHz bands of spectrum anywhere between 1 kHz and 2 GHz. The RSPduo provides three software selectable antenna inputs, and clocking features ideally suited to industrial, scientific and educational applications. All it needs is a PC and an antenna to provide excellent communications receiver functionality. A documented API allows developers to create new demodulators or applications around the platform.

- Dual tuner gives independent coverage from 1 kHz - 2 GHz using 2 antenna ports simultaneously.
- 14-bit ADC silicon technology (not another 8 bit dongle!).
- Up to 10 MHz visible bandwidth (single tuner mode) or 2 slices of 2 MHz spectrum (dual mode).
- 3 software-selectable antenna ports (2 x 50 Ohms and 1 x 1k Ohms high impedance balanced/unbalanced input).
- High impedance antenna port (1 kHz to 30 MHz) with selectable MW notch filter and choice of 2 pre-selection filters.



## SDR Receiver RSP1A Radio Spectrum Processor

**\$119.95** HRO Discount Price

The SDRplay RSP1A is a major upgrade to the popular RSP1—it is a powerful wideband full featured 14 bit SDR which covers the RF spectrum from 1 kHz to 2 GHz. All it needs is a PC and an antenna to provide excellent communications receiver functionality. Combined with the power of readily available SDR receiver software (including 'SDRuno' supplied by SDRplay) you can monitor up to 10 MHz of spectrum at a time. Documented API allows developers to create new demodulators or applications around the platform.

- Continuous coverage from 1 kHz to 2 GHz
- Up to 10 MHz visible bandwidth.
- Powers via USB cable with a type B socket.
- 14-bit ADC silicon technology (not another 8 bit dongle!).
- 11 high-selectivity, built in front-end filters.
- Software selectable AM / FM and DAB broadcast band notch filters.
- Software selectable multi-level low noise pre-amplifier.
- Bias -T power supply for powering antenna-mounted LNA.
- RF shielding layer inside case.
- SDRUno—world class Windows SDR software.
- Documented API for new apps development.
- Single SMA antenna socket covering entire frequency range.



## SDR Receiver RSP2 / RSP2 pro Radio Spectrum Processor

**RSP2 – \$169.95**

**RSP2Pro – \$192.95**

HRO Discount Prices

The RSP2 is a wideband full-featured SDR covering all frequencies from 1 kHz up to 2 GHz. This enhanced version of the RSP1 provides three software selectable antenna inputs, and new stability and clocking features. Combined with the power of SDRUno receiver software, this receiver can monitor up to 10 MHz of spectrum at a time. The RSP2 is available in two versions—the standard RSP2 is housed in an RF shielded plastic case and the RSP2pro is in a black painted steel case for industrial users.

- Low noise floor.
- 10 built-in front-end pre-selection filters, with substantially enhanced selectivity.
- Frequency coverage to 1 KHz.
- Software selectable variable gain Low Noise Pre-amplifier.
- 2 x SMA Software Selectable 50Ω RF ports (1.5 MHz – 2 GHz).
- One x high impedance RF port (1 kHz–30 MHz).
- Built in selectable MW / FM notch filters.
- Highly stable 0.5 PPM TCXO trimmable to 0.01 PPM.
- 24 MHz reference clock input / output connections.
- 4.7 V Bias-T option (on one of the software selectable antenna inputs).
- RF screening within a strong plastic case for the standard RSP2.
- A rugged metal box version – the RSP2pro.

**Now available, new SDRUno, RSP compatible version of Studio 1.**

The benefits of using the RSP2 with SDRUno software include:

- Highly integrated native support for the RSP2 professional grade software based upon class-leading Studio 1. Free of charge.
- Calibrated S-Meter including support for IARU S-meter standard.
- Calibrated RF power meter with in excess of 100 dB of usable range.
- Best in class audio quality.

## SWL Guides



## Worldwide Listening Guide 8th Edition by John Figlio

The expanded 8th Edition WLG explains radio listening in all of today's formats – "live," on-demand, WiFi, podcast, terrestrial, satellite, internet, digital, and, of course, AM, FM and SW. Includes a comprehensive program guide to what can be heard how, when, and where. Spiral bound to open in a flat, easy-to-use format. **HRO Price \$29.95**



## Nifty!

### Radio Monitoring Guide

Covering 0.5 to 500 MHz, this reference to shortwave, police, fire, aviation, marine radio and more, combines shortwave listening and VHF / UHF scanning into one guide. Use it as a tuning guide, and for programming the scanning capabilities of your radio. Has information

useful for monitoring radio services including International space station frequencies and NASA re-broadcasting. Amateur radio HF DX propagation beacons, plus Maritime and other popular emergency and communication nets are covered. Web Page URL's are provided to sites offering current broadcast schedules. **HRO Price \$15.95**

## Farallon Electronics



### PACTOR-4 DR-7400

HRO Price \$1498.00

The DR-7400 offers a lower priced entry to the P4dragon modem class. The DR-7400 has been optimized for use with the new high-end data transmission mode PACTOR-4.

The DR-7400 is software compatible to the PTC-II series and to the DR-7800 so that existing PACTOR software (AirMail, RMS Express, Alpha etc.) can continue to be used.

Due to the plug compatibility of the radio ports, a change from the tried and tested PTC-II technology to the innovative P4dragon technology is very easy. Change over the plugs, turn on, and enjoy PACTOR-4!

- Has many of the same features as the DR-7800.
- Backwards compatible to PACTOR-1/2/3. Automatic negotiation during link setup.
- Noticeably improved reception with PACTOR-2 and PACTOR-3.
- Operating Modes: PACTOR-4, PACTOR-3, PACTOR-2, PACTOR-1, weather-FAX (receive), GPS / RTTY / NAVTEX decoder.



### PACTOR-4 DR-7800

HRO Price \$1849.95

The DR-7800 P4dragon is the no compromise further development of the legendary PTC-II, which was designed for professional use and for the ambitious amateur radio enthusiast. The DR-7800 has been optimized for use with the new high-end data transmission mode PACTOR-4.

The DR-7800 is software compatible to the PTC-II series so that existing PACTOR software (AirMail, RMS Express, Alpha etc.) can continue to be used.

- Operating Modes: PACTOR-4, PACTOR-3, PACTOR-2, PACTOR-1, weather-FAX (Receive), GPS decoder.
- Display: 256 x 64 pixel OLED, blue, high contrast, excellent readability, no viewing angle problems, display of spectrum and much more.

### PACTOR-4

- Max net speed 10500 bps.
- 1.5-3 x faster than P3.
- Backwards compatible.
- 2400 Hz bandwidth.
- Highly adaptive.
- Highly resistant to interference.
- 6 auto notches.
- Adaptive equalizer.



### PTC-IIIusb

HRO Price \$1149.95

As successor to the beloved PTCIIusb it is mainly designed for PACTOR-III, thus allowing worldwide E-mail traffic via shortwave. It is also suitable for all other available modes, e.g. with Packet Radio, RTTY, weather FAX reception or decoding CW.

The PTC-IIIusb is software compatible to the PTC-IIusb so that existing software (AirMail, RMS Express, Alpha etc.) can continue to be used.

The PTC-IIIusb is not only an excellent HF-modem but also a powerful multimode controller. It supports the following modes: PACTOR-I/II/III, PR, (also RPR), RTTY, CW, PSK31, FAX, SSTV, AMTOR, NAVTEX, APRS@-Beacon.

Remote control your transceiver directly from the PTC-IIIusb for really comfortable operation. The PTC-IIIusb TRX interface is compatible with equipment from Icom, Yaesu, SGC, and Kenwood.

### PACTOR-III as standard

- Widespread proven technique (Winlink, SailMail etc.).
- Automatic frequency correction.
- Max. 5200 bps net.
- High adaptivity.
- High interference immunity.
- Max 2400 bandwidth.



## Farallon Cables / Accessories

Model	Description	HRO Price
<b>Miscellaneous</b>		
9001	6' power cable	\$12.95
8120	1200 baud packet cable	\$49.95
8050	9600 baud packet cable	\$49.95
<b>Control Cables</b>		
8080	Modem to Kenwood or Yaesu radio, SCS 13pin DIN to DB9 female, 1.5m.	\$39.95
8081	Modem to Icom radio, SCS 13pin DIN to 3.5mm Mini Phone Plug, 6'.	\$39.95
8083	Modem to Icom or SGC radio, SCS 13pin DIN to male DB9, 5'.	\$39.95
8085	Modem to Yaesu FT847 radio, SCS 13pin DIN to DB9 female, 1.5m	\$39.95
8130	Modem to Yaesu radio, SCS 13pin DIN to 8pin Mini-DIN, 2m.	\$39.95
<b>Audio Cables</b>		
8050	Modem to Yaesu radio SCS 5 pin DIN to 6 pin mimi DIN 9600 baud.	\$49.95
8120	Modem to Yaesu radio, SCS 8pin DIN to Yaesu 6pin Mini-DIN, 2m 1200 baud.	\$49.95
8123	Modem to Yaesu radio, SCS 8pin DIN to Yaesu 5pin DIN, 2m.	\$49.95
8125	Modem to Yaesu radio, SCS 5pin DIN to 1/8" stereo phone plug.	\$49.95
8127	Modem to Yaesu FT847 radio, SCS 5pin DIN to 1/8" stereo phone plug.	\$49.95
9090	Modem to Icom radio, SCS 8pin DIN to Icom 8pin DIN, 1.5m.	\$49.95
9095	Modem to Icom radio, SCS 8pin DIN to Icom 13pin DIN, 1.5m.	\$49.95
9096	Modem to Kenwood radio, SCS 8pin DIN to Kenwood 13pin DIN, 1.5m.	\$49.95
9097	Modem to Kenwood radio, SCS 8pin DIN to Kenwood 13pin DIN, 1.5m.	\$49.95

(see complete cable reference chart at [www.farallon.us](http://www.farallon.us))



## Get on the Air with HF Digital

Explore digital radio below 30 MHz! Here is a step-by-step guide that'll get you started.

Written in an easy to understand, conversational style, this book will show you how to set up and operate your own HF digital station. It's a fun and easy way for beginners to get on the air! **Let's Build an HF Digital Station**

Exploring the three essential components of your station: a radio, a computer and a device that ties them together.

### PSK31, RTTY and JT65

Hands-on instructions to get started with the three most popular HF digital operating modes today.

### MFSK and Olivia

With these two modes you'll still be chatting long after the bands have supposedly gone "dead."

### PACTOR

PACTOR is a great way to get your message through error free,

**Plus** articles from the pages of QST magazine!

**#0833 HRO Price \$19.95**



# PACKET

**Kantronics**



## KAM XL™

### Multi-Mode DSP Controller

HRO Price \$409.95

Kantronics' third generation multi-mode TNC is a state of the art design for operations on HF, VHF and UHF while supporting DSP modems and popular new modes of operation. The unit provides modes of Packet 300, 1200 or 9600 baud, G-TOR, Pactor 1, AMTOR ARQ, PSK31, RTTY, NAVTEX/AMTEX, ASCII, WEFAX and CW. It has a dual port mailbox and remote SYSOP access. It is GPS NMEA-0183 compatible and provides Kantronics Host Mode and KISS.



## KPC-3 Plus 512K USB

### VHF / UHF TNC

HRO Price \$199.95

This compact, low current TNC has become the work horse of packet radio today. It features multiple packet connects, digipeating for APRS® operations, WEFAX reception, a GPS mode for tracking, personal packet mailbox and more.



## KPC-9612 Plus 512K USB

### Dual-Speed Dual-Port TNC

HRO Price \$399.95

This is the rapid delivery model, supporting 9600 baud. It features both 1200 and 9600 packet ports, advanced APRS® digipeating (APRS® is a trademark of Bob Bruninga), (K-Net) networking, amateur beeper (paging), the ability to download EMWIN weather broadcasts and more.

**Fax Numbers  
Pages 120-121**

## MFJ Accessories

**MFJ**



## SDR Transmit / Receive Switch

MFJ-1708SDR

An inexpensive wide-band SDR receiver presents everything on a band like a pan-adapter! If you want to know where the activity is, who's generating splatter, what's in the DX window, how wide your audio is or what frequencies are clear, it's all right there! During receive the MFJ-1708SDR switches your SDR to your antenna letting you see the entire band on your display. On transmit your SDR is switched out and grounded to protect your SDR. PTT and a failsafe RF sense circuit switches MFJ-1708SDR. For HF / VHF / UHF. **HRO Price \$74.95**



## USB to Radio Multimode Interface

MFJ-1204

Sign up for the digital revolution and explore a whole new world of amateur radio excitement using MFJ's universal USB radio interface! The MFJ-1204 is exceptionally easy to setup and use. However, simplicity doesn't mean compromised performance.

- Full USB connectivity.
- Powered by USB port.
- Dedicated on-board sound card.
- Quick plug-and-play connectivity.
- Incredibly easy to adjust and operate.
- Works with all digital modes.
- Dozens of free downloadable programs
- Innovative circuitry eliminates delay control.
- Transmit and receive using traditional modes such as CW, RTTY, SSTV, AMTOR, PSK31, and EchoLink, or explore newer modes like MT-63, WINMOR, WSPR, and WSJT-X. Key-in and station memory tuning.
- Perfect for base station, portable, or "go-kit" applications.

HRO Price 99.95

# RIG CONTROL

## Radio Control Software



HRO Price \$99.95

## HAM RADIO DELUXE SOFTWARE

### The Radio Amateur's Best Asset

*www.HamRadioDeluxe.com*

## Premier Ham Radio Software Suite for:

### RIG CONTROL

Organize buttons, sliders, and drop-downs to toggle radio options, select modes and filter settings, and control level inputs via your computer screen.

### LOGBOOK

A complete DX operations center, Logbook is the ideal shack accessory for everyone. Keep track of all important contact information with the click of a mouse.

### DIGITAL MODES

DM-780 is capable of digital modes, including CW, RTTY, SSTV, PSK31, MT-63, and more. Digital Master interfaces with the popular KIEL WinKeyer.

### SATELLITE TRACKING

Take the guesswork out of satellite operations using the latest orbital mechanics equation and up-to-the-minute Keplerian element information.

### ROTATOR CONTROL


Integrating with Logbook and Satellite Tracking, Rotator Control manages beam headings via any computer interfaced rotator controller.

### Support:

<https://support.Ham-Radio-Deluxe.com>

### Forums:

<https://forums.Ham-Radio-Deluxe.com>



**The  
ABCs of  
Software  
Defined  
Radio**

by Martin Ewing, AA6E

The ABCs of Software Defined Radio is an introductory guide to SDR and Digital Signal Processing (DSP) technologies. Written in a friendly style, it offers a straightforward look inside SDR and provides a foundation for those who want to understand the subject on a more fundamental level. As you read, you'll discover the basic principles of SDR, advantages to SDR technology, and ways to utilize it in Amateur Radio operations...all with a minimum of mathematics!

HRO Price \$19.95

# RADIO REMOTE CONTROL

## REMOTERIG

*The Ultimate in Remote Control*



**Remoterig  
RRC-1258-MkII-S-Set**  
\$489.95 – HRO Price for the Set

The Remoterig RRC-1258-MkII-S-Set was developed to control Amateur Radio stations remotely via the Internet in a user friendly and cost-effective manner.

Remoterig units are used in pairs; one unit is connected to the radio, and the other to the control equipment. The system is unique in that no PC is needed; both voice and data communications are handled by the two units.

The RRC-1258-MkII-S-Set can be configured to work with almost all ham equipment currently available from Icom, Kenwood, Yaesu, and Elecraft. Remoterigs are especially useful in situations where you are (1) not allowed to install antennas at your home location, (2) the noise level is so high that a normal signal exchange is not discernible, (3) you want to build an antenna system too large for your local urban area, or (4) you do not want to be dependent upon a PC for the remote control.


The ultimate functionality of the Remoterig RRC-1258-MkII-S-Set can be experienced when the system is used with radios having detachable front panels such as the Kenwood TS-480, TS-2000, or Icom IC-706 series. Simply replace the cable between the control panel and the radio with the Remoterig system. The Yaesu Twin version and Electric K3 Twin versions are available.

The system also works very well with more traditional remote control situations from PC-based control software, like Ham Radio Deluxe; the Remoterig boxes solve the voice and data problems, but you do need a PC for the control software itself in this particular setup.

**Now with Dual  
(Stereo) Receiver  
and  
Includes 12 V  
Power Supply**

The Remoterig system itself will not introduce any latencies, and those introduced by the Internet will rarely be a noticeable problem. The Remoterig system also includes a unique solution for operating CW over the Internet with, among other things, a built-in CW keyer that uses a standard 3.5 mm stereo plug.

The Remoterig RRC-1258-MkII-S-Set is connected to the Internet primarily via 10 or 100 Mbit Ethernet cable, and fixed connections like DSL, cable, or WLAN. 3G based mobile solutions will also work, although occasionally with reduced performance. The system is portable and can be used from almost any network connection in the world. Session initiation, audio (VoIP), and data are transferred using standardized protocols like SIP, RTP, etc., where you can select different audio qualities depending on available bandwidth. The Remoterig system is easily configured via modern USB and WEB based user interfaces. Stereo (dual receiver) works only with radios with dual receivers.

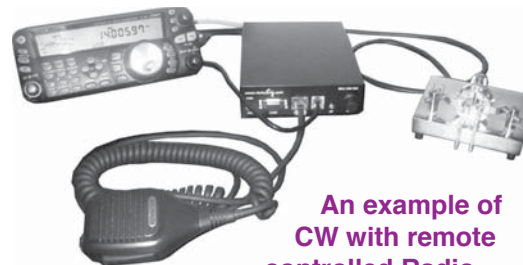


**An example of  
CW with remote  
controlled Radio**  
**CW Keyer**

A CW keyer has been implemented in the RRC-1285S-MkII-S-Set software to make CW operation possible, even with longer Internet latencies and jitter. During normal operation we depend on the radio's sidetone for CW, so the problem of Internet latency is solved by the sidetone being generated locally in the Remoterig box. Remoterig automatically mutes the sidetone generated by the radio for x number of ms after the dot or dash is sent; the delay can be adjusted depending on the latency.

The CW-handler is a kind of adjustable "jitterbuffer" for the CW keyer at the radio end. If the latency of your Internet connection is not constant, the delay (in ms) can be set before the radio is keyed. The CW keyer reconstructs the transmission on the fly before it is sent; a system that is much more tolerant of varying latencies (jitter). Lengthier delay settings may provide higher tolerance against jitter, but will also effectively delay the transmitted CW signal.

### Example: Remote control of Kenwood TS-480

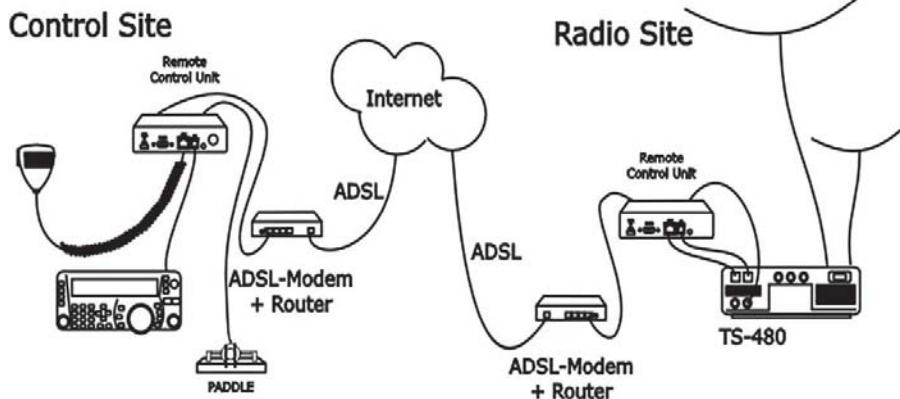

As an example, the diagram shows a TS-480 in use with the RRC-1258-MkII-S-Set. Any of the available radios with detachable front panels, like the IC-706, and TS-2000, will be configured in the same manner. The cable between the front panel and the radio is replaced with two RRC-1258-MkII-S-Set; one connected to

the control panel, and one connected to the radio itself. No PC is necessary in this case.

When the power button is pressed, the radio on the remote side will start up, and all audio and information from the panel travels via the Internet between the pair of RRC-1258-MkII-S-Set units – a very

similar situation to SIP-based IP telephones. All appearances and functions will be as if the front panel and radio were directly connected. Presently, the TS-480 is the simplest to adapt using one additional cable (optional Kenwood E30-3500-05). Connection cables can also be made using the RJ-45 and RJ-11 connections.





**378**


**~~347~~ unique radio Programmers ...**

**HRO Can Now Supply  
Radio Programming Software\*  
for Any Radio Model that  
RT Systems Supports.  
Including Radios From:**

**Alinco  
Anysecu  
AnyTone  
BTech  
Baofeng  
Baojie  
Hesenate  
HYS  
Icom  
JetStream  
Jintom  
Juantai  
Kenwood  
Leixen  
Luiton  
Pofung**

**Puxing  
Quansheng  
QYT  
Radioddity  
Retevis  
Rugged Radios  
SainSonic  
TDXOne  
Tokmate  
Tonfa  
TYT  
VGC  
WLN  
Wouxun  
Yaesu  
Zastone**

Too many models to list.  
Check for your radio model at:  
**[www.rtsystems.com](http://www.rtsystems.com)**

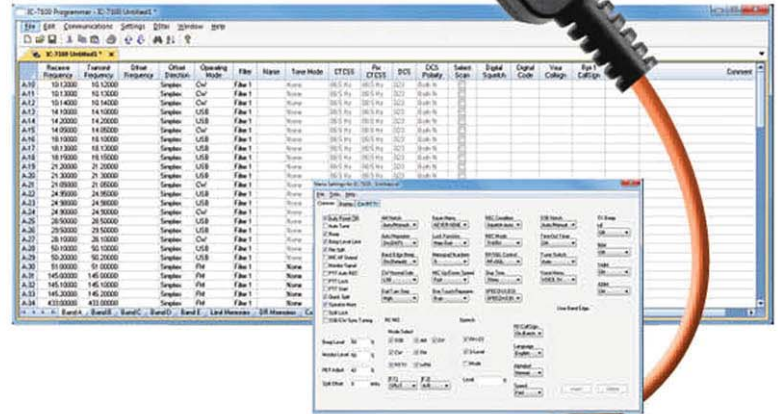

**The Programming  
System that Works!**

*"I spent countless hours trying to program my Chinese radio with their software and USB cable with no success. After purchasing the RT Systems cable and software kit everything worked great!*

*It took more time for my computer to start up than it did to get the software and cable to work."*

**- KD0MDP in Peyton, Colorado**



For More Information:  
[www.rtsystems.com](http://www.rtsystems.com)  
800-921-4834  
Tech Support: 303-586-6510

A RIGblaster is the easiest way to connect your radio to your computer to operate PSK31, RTTY, WinMOR, Olivia, Packet and more! Chase DX easily using advanced JT65-A! Unrivaled simplicity, True FSK, True-keyed CW & CAT/CI-V Control – see why these are the World's Finest Digital Mode Interfaces! Includes DVD with more than 100 popular software programs. All RIGblasters are ground isolated and RF Filtered. Supplied with all the cables you need to get on the air. These models work with more than 2000 radio models. Kits are available for 4-pin round or RJ22 connectors.



## RIGblaster Blue

The West Mountain Radio RIGblaster Blue is a completely integrated Bluetooth wireless interface. Use a Bluetooth headset with your radio. Provides safe, secure hands-free operation. VOX PTT is available in the headset mode. Pair with any compatible laptop or tablet for mobile operation. Use with Yaesu, Kenwood, Icom, Ten-Tec and Elecraft radios. Pairing radio to any compatible smartphone or tablet provides for mobile rig control of digital modes. (Compatible software is required.) Perfect for mixed mode nets plus PSK31, RTTY, WinMOR and Packet. Operate using over 100 popular ham radio sound cards (optional). **HRO Price \$189.95**



## RIGblaster Advantage

The only RIGblaster with a built-in soundcard. It works with any radio using one USB cable to connect to PC. Built-in CAT or CI-V rig control interface. Mic input with PTT override and interrupt. Front panel transmit and receive audio and VOX delay controls. Fully isolated CW / FSK output for keyboard CW and RTTY. Includes (1) 3-ft 8-pin mic cable, (1) 6-ft 1/8" audio cable, USB cable, software programs DVD, and accessory kit. #58012-1288 **HRO Price \$189.95**

## RIGblaster Plug & Play - Radio Versions

Model Number	Description	HRO Price
58011-962	RIGblaster Plug & Play Icom 8 pin ACC1	\$119.95
58011-963	RIGblaster Plug & Play Icom 13 pin Din	\$119.95
58011-964	RIGblaster Plug & Play Yik 6 pin Mini Din	\$119.95
58011-965	RIGblaster Plug & Play Kenwood ACC 13 pin Din	\$119.95

## RIGblaster Accessory Cables


Model Number	Description	HRO Price
#58107-971	Rig Control Cable for Icom CI-V Radios	\$9.95
#58108-972	Rig Control Cable for Yaesu Mini Din-8	\$14.95
#58108-974	Rig Control Cable for Yaesu Din-6	\$13.95
#58120-984	CW Cable Kit for RIGblaster Plus II, Plus, Plug & Play 6 ft.	\$9.95

## RIGblaster Plug & Play



Simple USB Plug and Play installation. One plug to the radio and one USB connection to the computer. Built in USB to serial converter for PTT, CW and CAT or CI-V rig control. USB powered, no additional power needed. Compact: great for mobile or QRP operation. Fully isolated CW keying output for direct keying of your rig's CW. Includes: radio specific 8-ft data jack adapter cable, 12" computer audio and USB cables and software programs DVD. #58009-963 **HRO Price \$119.95**

## RIGblaster Nomic



The RIGblaster Nomic is a small, simple, rugged and inexpensive sound card interface, perfect for Echolink®, portable, or field set-ups. Supplied with both a standard DB9 RS232 serial cable and USB cable interface (supported for Mac (OS9,10), Linux, Windows (98SE – Vista 32 and 64 bit)! May be used with old or new computers with your choice of USB or RS232 DB9 serial. No external power supply necessary so it is great for portable or QRP operation. Simple and inexpensive choice for a dedicated Internet link with the Echo-Link® System. Includes: 3' 8-pin round circular mic cable, 3' RJ45 mic cable, USB to RS232 male adapter, 6' DB9M to DB9F serial cable, (2) 6' 1/8" audio cables, owner's manual, software programs DVD, and accessory kit. #58008-959 **HRO Price \$59.95**

## RIGtalk

### USB Rig Control Interface

Control your radio using your PC. USB to TTL level interface for CI-V control: Icom, Ten-Tec, or Elecraft. CAT control for Yaesu and CI-V radios. Pocket-sized USB dongle. Design tested with most rig control and logging software. Compatible with USB 2.0 or lower. Includes software programs DVD.



Order pre-packaged with radio cable:

**RIGtalk for ICOM CI-V**  
58202-1005 **HRO Price \$56.95**

**RIGtalk for Yaesu Mini Din-8**  
58203-1006 **HRO Price \$61.95**

**RIGtalk for Yaesu Din-6**  
58203-1007 **HRO Price \$64.95**



## Radio Control

### HamLinkUSB™

#### USB Rig Controller Plus

HRO Price \$59.95

*Connect and control your transceiver via USB with Plus option for T-R switch, key, foot-switch input, or user I/O.*



The HamLinkUSB™ Rig Controller Plus is a USB to logic level conversion device for CAT / CI-V enabled transceivers that provides PTT output, keying output, or foot switch input options.

The CAT / CI-V feature provides a logic level serial interface which connects directly with non-RS-232 CAT / CI-V inputs on Kenwood, Icom, Yaesu, Ten-Tec, Elecraft and Alinco models. The controller is compatible with most soundcard and software control programs such as PK-Term 3.0.

#### HamLinkUSB Optional Cable Assemblies

**HLUSB-CIV** CI-V - Icom, Ten-Tec, Elecraft.  
HRO Price \$8.95

**HLUSB-CAT** MiniDIN-8 cable assembly for Yaesu FT-857 / 817 / 100 / 100D  
HRO Price \$13.95

**HLUSB-4CON** 4 conductor with 3.5 mm plug to open end cable.  
HRO Price \$13.95

## Sound Card Modem



### Navigator

The Navigator USB sound card modem has a proven USB audio sound chip, six FTDI USB serial COM ports, a K1EL WinKey keyer, true FSK and rig control connections for every radio. A built-in USB sound card with isolated audio I/O to your radio prevents ground loops. A second audio input lets you use both receivers in a dual receiver radio. The logic level and RS-232 rig control ports support your Icom CI-V, Yaesu CAT, Kenwood and other radios. Front panel controls set both RX audio levels, TX audio output level, audio monitor level, and the CW speed. **HRO Price \$374.95**

## Multimode Data Controller



### PK232SC Multimode Data Controller

HRO Price 599.95

With the addition to the PX-232 of a built-in sound card, rig control, computer isolation, and total USB connectivity, the PK-232SC brings a new level of performance with sharp, accurate DSP filters for all its internal data modes and dual transformer isolation for sound card data modes. Weak signals magically appear from the noise and QRM bounces off the new DSP filters for cleaner copy with fewer errors than the old analog filters.

#### More Filters, Better Filters, Automatic Selection

The PK-232SC brickwall filters have tighter bandwidth and steeper skirts for improved noise and QRM rejection. New firmware (version 7.2) allows a wider selection of filters than the original PK-232, so the filter can match the mode. The correct DSP filter is automatically selected when you choose an internal mode. In RTTY, Timewave's proven twin peak filters pluck the mark and space tones from the noise and QRM for great copy. In PACTOR, the filter bandwidth automatically changes when the baud rate shifts in response to the error rate of the link. In Morse (CW), the operator can preset either 100 Hz or 200 Hz bandwidth. The PK-232SC is compatible with all Windows XP, Vista, and Windows 7 software terminal programs for the PK-232.

#### Sound Card Interface and Rig Control

For maximum flexibility, Sound Card / TNC switching is both software and panel switch controlled; sound card mode selection is software controlled. For example, when operating with Radio Operating Center software, changing to PSK31 from Pactor or MT63 is a simple menu click. The single USB cable from your PC also moves your logic level Kenwood RX / TX / RTS / CTS, Yaesu CAT, and Icom CIV and USB rig control interface to the back panel of your PK-232SC.

#### All the Proven Modes + All Sound Card Modes

PK-232SC supports all new sound card modes in addition to all of the existing PK-232 modes: Pactor, VHF/HF packet, AMTOR/SITOR, Baudot, ASCII, Morse, HF Weather FAX, TDM, and NAVTEX.

The PK-232 / PSK comes with a complete cable and connector set in addition to Timewave's on-line and telephone support. As always, you can upgrade any PK-232 ever built to the latest PK-232SC!

- Digital signal processor.
- 18 DSP filters.
- Twin peak RTTY filters; adaptive PACTOR filters.
- Works with all sound card modes.
- USB sound card audio.
- Rig control for Icom, Yaesu, and Kenwood transceivers.
- Single USB computer connection.
- Galvanic computer isolation.

## Digital Processor



### DSP-599zx

#### All Mode Noise Filter / RTTY Modem

This powerful noise and QRM filter surpasses the newest "DSP" radios with its flexible features. Continuous filter tuning up to 5 kHz opens up wider bandwidth modes like shortwave, AM broadcast, and VHF / UHF FM. Heterodynes disappear, weak signals pop up from the noise, and the sharp filters slice away QRM.

The DSP RTTY modem (w/optional DSP-RTTY software) pulls out solid copy when you can barely hear a signal. Filter settings are easy-to-read on the backlit alphanumeric LCD display. Pushbuttons select noise reduction, memories, voice, CW, and data modes. Optical encoders tune the filters.

- Hyperspeed DSP - 27 ns, 36.8 MIPS.
- 2 selectable channels with multiple memories.
- Front panel programmable input sensitivity and line output level.
- AC line noise AM filter.
- Calibrated audio volt meter & generator.
- 13 preset data filters plus two user presets.

**DSP-599zx HRO Price \$399.95; AC-8 P.S. \$24.95**

## Noise Canceler

### ANC-4

The ANC-4 RF device eliminates or reduces power line noise, computer noise, TV generated interference, and other types of electrical noise. Attach the unit directly to the antenna connector of the receiver or transceiver to cancel locally generated noise before it affects the receiver AGC circuits. Reception of signals well below the noise level of the local interference is possible.

To cancel locally generated interference, the ANC-4 detects the interfering signal and adjusts its phase and magnitude so that it matches the offending interference at the receiver input, but is 180 degrees out of phase. Front panel controls allow adjustment of both phase and magnitude.

Connect the ANC-4 between the main station antenna and the receiver antenna connector. A second antenna connects to the ANC-4 to pick up noise. A short wire antenna or short collapsible whip is generally satisfactory for eliminating noises generated around the operating position or in the house, but an external antenna works better to eliminate noises generated outside the home. Any noise antenna that works, including combinations of horizontal and vertically polarized antennas, is satisfactory.

The ANC-4 operates as an active antenna by using the noise antenna and the NOISE GAIN control to amplify the antenna output. The unit can also be used as a diversity combiner to peak weak signals or null interfering signals. **HRO Price 189.95**



## SignalLink™ USB

### Integrated USB Sound Card

SignalLink™ USB combines the legendary performance of our SL-1+ with a state of the art "built-in" low-noise USB sound card. The unit delivers optimum performance while eliminating the need to attach to your computer's existing sound card. Convenient front panel controls and simplified installation make this one of the most user-friendly interfaces on the market.

ALL sound card digital and voice modes are supported by the SignalLink™ USB including traditional modes such as RTTY, SSTV, CW, PSK31, MT-63 and EchoLink®. Performance on all modes has been optimized by the use of special low-noise parts and careful design techniques. Front panel controls let you adjust your transmit audio, receive audio and transmit delay "on the fly."

The SignalLink™ USB works with ALL radios and can be attached to the mic jack, data port or accessory port (see table below.) A wide selection of fully assembled radio cables is available for common base and mobile radios. A special unterminated radio cable is available for handhelds and radios that use a non-standard connector.

The SignalLink™ USB comes fully assembled and tested. No external power required; power is from the USB port. The unit comes with a USB cable. Specify which cable is to be included by using the table below. Also included: mono cable, jumper wires, allen wrench, software CD, documentation. Supports Windows, Mac OS9.1 or later and Linux. FCC certified to comply as a Class B digital device. Unit prices including the radio cable are shown in the table below. **HRO Price \$114.95 each**

### Microphone Connectors

SLUSB4R	For 4-pin round mic connector
SLUSB8R	For 8-pin round mic connector
SLUSBRJ11	For RJ-11 mic connector
SLUSBRJ45	For RJ-45 mic connector
SLUSBKX3	For Elecraft KX3

### Accessory Port Connectors

SLUSB5PD	For 5-pin DIN data / accessory port
SLUSB8PD	For 8-pin DIN data / accessory port
SLUSB6PM	For 6-pin mini DIN data / acc.port
SLUSBK3	For Elecraft K3
SLUSB13I	For Icom 13-pin DIN accessory port
SLUSB13K	For Kenwood 13-pin DIN acc. port



*West Mountain Radio audio products contain ClearSpeech® noise reduction/digital signal processing that provides extremely effective noise reduction for voice and CW. Reduces or eliminates atmospheric noise, hum, hiss, heterodynes & static. Greatly improves the signal-to-noise ratio and thus the readability of all QSOs.*



## Noise Reduction Processor

### CLRdsp ClearSpeech® DSP

Speaker and headphone amplifier with Clear-Speech® adaptive DSP noise reduction for voice and CW. Recognizes intermittent nature of CW and allows it to pass noise free. Continuously adjustable noise reduction. Contains 11 watt (into 4 ohms) power amplifier. Sturdy aluminum case. Ideal for mobile operation as well as home station. Plugs into the speaker or headphone output on the radio. Powerpoles® plug into any 12V supply. #58407-949 **HRO Price \$199.95**

## VHF & UHF Bandpass Filters



Get rid of unwanted noise and give your 2 m and/or 440 MHz receiver the best front end sensitivity. Reduce the squawks and squeals of intermod and protect from lightning. Good passband loss and out-of-band attenuation with excellent SWR. These filters are made to be transmitted through (tested to 160 Watts) and are available with UHF or Type "N" connectors. **HRO Prices: VHF \$159.95; UHF \$219.95.**

## High Power 15 Watt Speaker



### PWRspkr 15W

RMS linear power amplifier minimizes distortion at high sound levels. Sharp bandpass filter with 300 Hz to 3.2 kHz pass band attenuates unneeded bass and treble sounds. Adjustable gain control. Plugs into radio's speaker or headphone jack. Ideal for use in truck or car for improved communication in noisy environment. Power cable fitted with Powerpole® connector. #58406-947 **HRO Price \$75.95**

## Noise Reduction Speaker

### CLRspkr ClearSpeech®DSP



Amplified loudspeaker with ClearSpeech® adaptive DSP noise reduction for voice and CW. Recognizes intermittent nature of CW and allows it to pass noise free. Continuously variable adaptive filter noise reduction. Contains 4-in. loudspeaker with 7.5 Watts RMS maximum amplifier. Volume control knob for adjustment of internal speaker sound level. Front mounted 1/8 - inch stereo output jack for powered speakers or 16 ohm (or higher) headphones. #58407-948 **HRO Price \$199.95**

## RF Immune Computer Speakers

### COMspkr

Eliminate HAM radio station interference. Replaces RF interference prone computer speakers. Amplified speaker system optimized for operation in close range of any radio transmitter. Exceptionally high rejection of radio frequency interference from 1 to 1000 MHz. Stereo high fidelity response for use with voice or music. High 3-Watts per channel acoustic power output can be heard clearly in noisy environments. Built-in amplifier assures compatibility with most computers and/or two way radios. #58409-950 **HRO Price \$39.95 per pair**





## Noise Canceller



### Signal Enhancer MFJ-1026

An adjustable antenna network that combines two antenna signals to give various directional patterns. Null out strong interfering signals or peak weak signals at the push of a button. Use external or built in active noise antenna. Works on all modes from BC to low VHF. Eliminate severe line noise from many sources before it ever gets into your receiver. Can run off 12 VDC or 110 VAC using MFJ-1312D.



### MFJ-1025

Similar to the MFJ-1026 without the active antenna.

## Noise Filter



### AC Line Filter MFJ-1164

Filters AC line RFI, surges, noise, transients, hash 30 dB. Four 15 A / 120 VAC outlets.

## SSB Speech Refined



### MFJ-616

Speech Intelligibility enhancer extraordinaire. An amazing difference in understandability of SSB speech. No hissing, ringing, or other strange effects, making a dramatic improvement.

**MFJ-618** has separate adjustable channels for each ear.

## Speakers / Headphones



### Headphones MFJ-392B

MFJ's communication headphones are perfect for amateur radio and shortwave listening. All modes, each earphone with separate volume control. Super padding. 9' cord. Padded headband and comfort cushion ear pads. Mono / stereo adaptor included..



### MFJ-393 (K,I,Y)

Professional boom mic / headphones for contesting, DXing, traffic nets. Comfortable padding seals out noise. Frequency tailored mic. Adjustable boom.



### Speaker MFJ-281

MFJ ClearTone™ restores the broadcast quality sound of shortwave listening. Makes copying easier, enhances speech, improves intelligibility, reduces noise, static, hum. 3-inch speaker handles 8 Watts. 8 ohm impedance. 6 foot cord.

## Microphones



### MFJ-299

Desk microphone, tailored for SSB. Adjustable 11 inch boom. Graphic equalizer, compressor, VU meter, on-air indicator, PTT / lock switch.



### MFJ-297

A basic SSB boom mic with PTT switch.



### MFJ-1263

Microphone control center allows instant switching of microphones to different transceivers. Use PTT footswitch, headset-boom mic, phones, speaker, audio-in jack.

## KISS Mode TNC



### MFJ-1270X

A universal self-contained KISS mode TNC that works with every packet software program that supports KISS mode. Perfect for APRS. Fully compatible with WinLink 2000. Works with Windows, MAC OS X and Linux. Active audio filter cleans up analog signals. Small, inexpensive, low power consumption, expandable.



## HM-10XD



The HM-10 XD features our new HC-5X and HC-4X elements. The narrow response of the HC-4X is ideal for DX work and the full response of the HC-5X is great for everyday rag chew. It comes equipped with a microphone clip and a foam windscreen. CC-1 adapter required. **HRO Price \$CALL**



## HM-12

### Designed for Hams

The high output full range "Genesis" dynamic element in the HM-12 is designed to work with just about every amateur radio low impedance transmitter. The element is mounted in a unique internal shock mount and exhibits nearly -35 dB of rear rejection, reducing background and ambient noise from the transmitted signal. The "soft touch" PTT switch is wired to pins 3 and 4 for transmitter control with the microphone signal fed to pins 1 and 2 of the 4 pin XLR. The Heil HM-12 uses Heil CC-1 connecting cables. This microphone has a unique internal windscreen

plus an external foam windscreen. It has the 5/8" X 27 microphone clip designed for our booms and stands. Frequency response: 80 Hz-14 kHz @ -55 dB. Satin black finish. **HRO Price \$CALL**



## PR-77D PR-77DP

Available in Black or Purple

Use this professional quality dynamic microphone for commercial broadcast, recording, podcasts and any application that requires a smooth flat response over a wide frequency range, excellent transient response, great speech articulation and low IMD. With rear rejection of over -40 dB, it also features a two position switch allowing the selection of the best characteristics for voice or music. **HRO Price \$CALL**



## PR-781 / PR-781G

These professional quality dynamic cardioid microphones for amateur radio provide a wide frequency response, great articulation, and a -40 dB of rear rejection with ample output to drive most amateur radio microphone inputs. The PR-781G is specifically designed for use with most makes of Elite transceivers by Kenwood, Flex, Elecraft, Yaesu, Ten Tec and Icom.

The PR-781G is the same great design and performance as the PR-781 but now with a beautiful gold screen. Both models come with the SM-3 mount. **PR-781 HRO Price \$CALL; PR-781G HRO Price \$CALL**



## The Fin™

The Fin™ utilizes the PR-20 element so popular in the professional audio realm. It is housed in a gorgeous high-gloss chrome finish. If phantom power (not compatible with Icom transceivers) is provided to The Fin™, the blue wind screen (also available in red or white) becomes illuminated by 4 embedded LEDs. Now also available in satin black with red, white or blue LEDs/foam. CC-1 XLR required. **HRO Price \$CALL**



## Handi-Mics

### HM-IC

The Handi Mic is an ultra-compact hand microphone utilizing a special internal shock mount, yielding superior audio compared to the standard microphones offered by the radio manufacturers. The Handi Mic is available with the "iC" element designed for Icom rigs. A special "Pro" version is also available, with a wide-frequency

"broadcast" element that sounds great on FM mobile rigs. **HRO Price CALL**



Model	Element	PTT
HM-IC	Electret for most Icom	Yes
HM-PRO	Wide range broadcast	Yes

## iCM / ICM BG

### Salvation for Icom Users!

Also available in Black and Gold

The iCM is a high-quality microphone for early iCOM transceivers that comes in an all platinum colored finish or a matte black with gold grill. It features a high-gain condenser element that provides full-bodied audio with plenty of drive to match up with the low-gain audio systems of the earlier iCOM rigs. It also works well with the higher-gain "Pro" radios and IC-7800. It comes with an attached, shielded 8' cable terminating in an 8-pin mic plug and a 1/4" PTT pigtail. **HRO Price \$CALL**



## Pro Connector Cables

This 8 ft long cable connects The Fin and PR Series microphones to your 8-pin Kenwood, Yaesu, or iCOM transceiver. Made with Heil-wire to help reduce RFI and noise. Pig tail easily connects to HS-2, FS-2 or FS-3.

CC-1 XLR BAL	FT-950, FTdx9000	\$40
CC-1 XLR I	Icom cable	\$40
CC-1XLR K	Kenwood cable	\$40

# MICROPHONES

## The Heritage HHG

The Heritage is a dynamic microphone with a vintage chrome look. It utilizes the PR 20 element and has a lockable on/off switch. It is available in chrome or black matte with blue foam windscreen. **HRO Price \$CALL**



## Heil PR30

The PR 30 was designed for commercial broadcast, live sound and recording. It has comparable sound to the finest condenser microphones because of its wide frequency response, excellent transient response and low IMD. The PR 30 comes standard with the SM-3 5/8" X27 mount. All the PR series microphones

require a CC-1 XLR cable to interface with your transceiver. Available in black or champagne. **HRO Price \$CALL**



## Heil PR40

The PR 40 was designed for commercial broadcast, live sound and recording. It features the Heil dynamic element with a perfectly flat response from 28 Hz all the way up to 18 kHz and has gorgeous articulation. The PR 40 is shipped with the SM-3 5/8" X27 mount and a padded leatherette carrying case and is available in champagne, chrome, gold, and matte black with gold grill finish. All the PR series microphones require a CC-1 XLR cable to interface with your transceiver. **HRO Price \$CALL**



## PR-10

### Mic Package

Small in stature, mighty in performance, the PR 10 combines a desk stand, boom and the latest microphone offering from Heil Sound.



The integrated mic exhibits outstanding speech articulation with perfect balance of highs and lows. Works well on most all transceivers. Requires a CC-1 XLR series cable to interface with your transceiver. Also available as the PR-10 Red with the LB-1R. **HRO Price \$CALL**





# MICROPHONE ACCESSORIES

## Mounts

### SM-1 Shock Mount

microphone not included

The ultimate suspension mount for your Heil hand microphones. This shock mount can be used on all Heil stands or booms with 5/8" x 27 standard threads. **HRO Price \$81.00**

### PRSM Shock Mount

This flexible support system helps suppress low-frequency rumble by dampening vibrations. The PRSM fits large-diameter microphones including the PR 30/40/781 and can be used on all booms or stands with 5/8" threading. **PRSM-B** black finish. **HRO Price \$CALL**  
**PRSM-C** champagne finish. **HRO Price \$CALL**

## Switches

### HS-2 PTT Hand Switch

Heil's high quality hand switch made for P.T.T. operation is shaped to fit your hand naturally and comfortably. Comes with a 6 foot cable that plugs into the AD-1 or CC-1 adapter. **HRO Price \$33**

### FS-3 Single Circuit Footswitch

Use the FS-3 to control the transmit function of your amateur radio. A 6-foot shielded cable is terminated with a commercial 1/4" plug that connects into the Heil CC-1 and AD-1 cable system. **HRO Price \$27**

### FS-2 Dual Footswitch

This unique dual-action foot-switch provides two sequenced micro-switches, one each for connection to your transmitter and your linear amplifier; when you press down on the footswitch, the amplifier's switch is engaged first, followed immediately by the switch for the radio, and when you let up the reverse sequencing takes place. This provides safe T/R switching for both radio and amplifier without need for a control cable between the two units. **HRO Price \$46.00**

## Illuminated Bases

### LB-1R Red finish with white light



### LB-1B Black finish with blue light



Heil Sound's fun light up bases have an oversized PTT with the Heil logo and LED lights that can be illuminated in 2 different ways. It has standard 5/8"-27 brass threading to work with any Heil Sound microphone accessories. This weighted base features a high strength plastic covering and great looks. **HRO Price \$CALL**

### CB-1 PTT Classic Base



This beautiful reproduction of a 1930 RCA microphone base has stainless trim and features a PTT with a 4" riser that accepts 5/8" x 27 hardware. **HRO Price \$77.00**

### FL-2 Flange Mount

With brass insert. Fits the PL-2T, SB-2, HB-1.

**HRO Price \$29**



### DT-1 Desktop Flush Mount



Allows PL-2T, SB-2 and HB-1 to slip into 1-1/2" hole drilled into desktop. **HRO Price \$36.00**


### WM-1 Vertical Surface Mount

The WM-1 is a unique mount for the Heil booms that allows them to be mounted on a vertical surface. The brass insert of the WM-1 ensures smooth, perfect fit with PL-2T and HB-1. **HRO Price \$23**



## Booms

### PL-2T Studio Boom



The PL-2T "Topless" boom is a unique articulated boom that lets you tuck your microphone cable away for a professional appearance. It accepts all Heil Sound 5/8" x 27 threading microphone mounting clips. Includes a C-Clamp. It can support a total weight of 2.5 lbs. **HRO Price \$121.00**

### SB-2 Small Boom



This compact, adjustable boom accepts standard 5/8 x 27 threading and comes with a C-Clamp. It is compatible with all Heil Sound hardware. **HRO Price \$64.00**

### HB-1 Economy Microphone Boom



The HB-1 is an articulated boom balanced by four external springs. It is capable of supporting microphones weighing up to 2.5 lbs. and any standard 5/8 x 27 threaded microphone hardware. The HB-1 is shipped with a C-Clamp mount that accepts up to a 1.5" thick cable and is compatible with all Heil Sound hardware. **HRO Price \$71.00**

### RS-1 Riser

This 12" riser allows you to mount any Heil Sound boom behind your transmitter or console. **HRO Price \$28**



## Wireless Adaptor

### HBA Wireless Connector

We bring to you a pair of simple wireless devices one connecting into any of our 3 pin balanced XLR microphones (PR 20, PR 22, PR 781, etc) and the receiver connected to the microphone input of any Heil AD-1 headphone adapter. It has a range of about 40'. The stations you work can not tell that you are using a wireless adaptor instead of a wired mic cable. A PTT is required. **HRO Price \$CALL**





## Pro-7



The Pro 7 is a stereo headset featuring an audio balance control allowing the user to adjust levels between speakers. It also features the Heil Sound Phase Reversal Switch, which allows the user to "move" the incoming signal to significantly improve copy in a tough DX pile up. The mic boom can be rotated for use on either the right or left ear. The Pro 7 is available in black, red, and blue. It can be outfitted with the HC-7 dynamic element or the iC electret element, the HC 74 Element for DX is available separately. Compatible with current AD-1 series adapter cables. **HRO Price \$CALL**



## Pro Set 3 Stereo Headphones

Pro Set 3 stereo headphones are professional and lightweight designed for music recordings, internet, commercial radio, and ham radio. They ship with 3 detachable cables: a 1.8 M flexible straight cable, a 1.8 M straight cable with 3.5mm plug, and a 3 M coiled cable. All cables feature a twist lock terminating in a 1/8" (3.5mm) professional gold plated screw-on 1/4" (6.3mm) adapter. The Pro Set 3 features the Heil Sound Phase Reversal Switch, which allows the user to "move" the incoming signal to significantly improve copy in a tough DX pile up. **HRO Price \$CALL**

## Pro Set Elite



The Pro Set Elite utilizes the HC-6 wide response microphone element. It has dual side, high efficiency speakers on acoustically tuned chambers for high rejection of outside noise. The unit folds up for easy transportation and storage.

The **Pro Set Elite** is available with the HC6 element for commercial broadcast applications (requires AD-1 adapter) or the iC electret condenser designed for low mic inputs used on many iCOM transceivers. The **Pro Set Elite iC** requires 5 volts of DC phantom power (provided by all iCOM rigs) and includes AD-1 iC adapter. **HRO Price \$CALL**

## Pro Sets

**CALL for  
HRO Prices**



Pro Sets are lightweight, versatile boomsets featuring the Heil Sound Phase Reversal Switch, allowing the user to "move" the incoming signal to significantly improve copy in a tough DX pile up. The Pro Set is available in three versions:

**Pro Set Media Pro** for computer is supplied with a high-level condenser element and two 1/8" plugs for applications requiring connection of a headset / boom mic to a computer's sound card.

**Pro Set 6** for commercial broadcast applications utilizes the HC-6 dynamic element. Requires AD-1 adapter.

**Pro Set iC** with electret condenser designed for low mic inputs used on many iCOM transceivers. The iC requires 5 volts of DC phantom power (provided by all Icom rigs) and includes AD-1 iC adapter.

### Pro Set Accessories:

**BAG -1** Leatherette travel bag for all Heil Sound headsets. **HRO Price \$29**

# HEADSETS

## Lightweight

### Handie Talkie Headset Single-sided or Dual-sided

**HTH, HTHD**

**NEW!**



These HTH single-sided and HTHD dual sided lightweight headsets are designed for use with popular handheld transceivers featuring an in-line PTT.

**Single (HTH)- or  
Dual-sided (HTHD)  
Models  
HRO Price \$CALL**

**HTH-i, HTHD-i** Works with 2-pin Icom.

**HTH-K, HTHD-K** Works with 2-pin Kenwood, Baofeng, and Wouxun.

**HTH-Y, HTHD-Y\*** Works with TRRS Yaesu / Vertex.

\*For weather resistant Yaesu / Vertex, use the HTH-Y and HTH-ADY adapter.

## BM-10

The BM-10 headset is a lightweight (only 3 oz), articulate boomset that is ideal for DXpeditions, mobile, and general rag chewing. The speakers are extremely sensitive and don't require much AF drive from the transceiver.

The frequency response is 60 Hz - 12 kHz with very low distortion. The ear pads are replaceable acoustic foam. The BM-10 comes in two versions, a BM-10-Dynamic and a BM-10-iC (electret), to accommodate many radios on the market today.

Ad-1 cable required. **HRO Price \$CALL**



## BM-17

The BM-17 is a new, lightweight headset designed for emergency communications available as either a single-side or dual-side model, with either a BM-17-Dynamic element or a BM-17-iC Electret element.



**BM-17 Dynamic Dual  
BM-17 Dynamic Single  
BM-17 ICOM Dual  
BM-17 ICOM Single**

**HRO Price \$CALL  
HRO Price \$CALL  
HRO Price \$CALL  
HRO Price \$CALL**





## Handheld Microphone

HMM-Dyn / HMM-iC

### Hand Microphone

The HMM brings new technology to the hand microphone. When you place a microphone element inside a clam shell, the result is a hollow muffled sound. To solve this problem, we installed a grill on the top of the microphone that de-tunes the internal resonance of the housing.

We came up with a very special, full-range microphone element with great speech articulation. A very flexible but sturdy coil cable terminates as all of our headsets with 1/8" male for the microphone and a 1/4" male for the PTT control. **HMM-Dyn (Dynamic) – HRO Price \$CALL**

Also offered with the iC electret element as **HMM-iC**. AD-1 cable required. **HMM-iC – HRO Price \$CALL**



## Receiver Audio Adjuster



### Parametric Receive Audio System (PRAS)



The PRAS allows radio operators to modify, shape, and improve their receiver audio using three separate equalization controls. The package comes with the HPS-5 Powered Speaker featuring a 5" driver and a 24-watt amplifier. Both the speaker and the Parametric Receive Audio System have been specifically tuned for amateur radio use. The PRAS and HPS-5 come with an XLR to XLR cable, 12-volt Y-Power Supply, 1/8" stereo to 1/8" stereo source cable, and 1/4" to 1/8" stereo adapter. **HRO Price \$CALL**

## High Performance Headsets

### Pro Micro PMD-6 Dual-sided


The lightweight Pro Micro headsets are designed for commercial broadcast applications. They are available in single sided or dual sided models. **HRO Price \$CALL**

**Pro Micro 6** is equipped with HC-6 element (AD-1 adapter required).

**Pro Micro iC** has an electret condenser designed for low mic inputs used on many Icom transceivers. The

iC requires 5 volts of DC phantom power (provided by all Icom rigs) and includes an AD-1 iC adapter.

### Pro Micro PMS-6 Single-sided



# WEATHER STATIONS

## DAVIS

Wireless Weather Stations

### Vantage Pro2™ HRO Price \$489.95

The Vantage Pro2™ weather station has a versatile sensor suite that combines our rain collector, temperature and humidity sensors, and anemometer into one package. Customize by adding consoles or special-purpose options. Available in both wireless and cabled versions.



This is the first and only weather station in its class to use frequency hopping spread spectrum radio technology to transmit weather data wirelessly up to 1,000 ft (300 m) outdoors, line of sight. Typical range through walls under most conditions is 200 to 400 feet (60 to 120 m). Add wireless repeaters for distances up to 1.7 miles (2.7 km).

- Large, backlit 3.5" x 6" (9 x 15 cm) LCD screen.
- Updates every 2.5 seconds.
- Options are available for UV/

solar, soil moisture, short and long-range repeaters, and much more.

- Optional WeatherLink data logger and software offer additional analyses.
- Electronic components are housed in a weather-resistant shelter.
- Power the console with the included power adapter or with three C batteries (not included).
- Comes with mounting hardware. Add optional #07717 Mounting Pole or #07716 Mounting Tripod.

### Vantage Vue® HRO Price \$389.95

This wireless weather station provides accurate, reliable weather monitoring in a self-contained, easy-to-install system. Includes outdoor sensor array and LCD console.



- Vantage Vue radio-compatible with our flagship Vantage Pro2 professional stations so you can mix-and-match most components.
- Station includes temperature, wind, humidity, and rain sensors; console; and mounting hardware (mounting pole sold separately).
- Console shows: time and date, moon phase, forecast icons, temperature, humidity, barometric trends, heat index, and wind chill.
- Rain totals and rain rate are updated every 20 seconds for the last 25 hours, days, months.
- Domed buttons are easy to sense and press. They glow-in-the-dark.
- Set 22 simultaneous, different alarms to warn of high winds,

freezing temperatures, rain rate, flood warning, and more.

- Track daily highs and lows, temperature and barometric changes by the hour.
- Graph the last 25 hours, days or months. View up to 50 graphs including temperature, rain, rain rate, wind and barometric pressure—all on the console.
- Windspeed updates every 2.5 seconds. Displays in miles per hour, meters per second, kilometers per hour and knots. Measures wind direction in compass points or degrees.
- Frequency-hopping spread spectrum radio ensures consistent transmission up to 1,000 ft. (300 m) from integrated sensor suite to console.

## Dummy Loads

### MFJ-9218



### QRP Wattmeter + Dummy Load

QRP Wattmeter / Dummy Load, rig protection circuit. Handles 5 Watts.

4 W x 1.5 H x 2.75 D inches. **HRO Price \$49.95**

### MFJ-267

### SWR Wattmeter + Dummy Load

Dry Dummy Load / SWR / Wattmeter combination. Three-inch cross-needle SWR meter, 1500 Watt dry load. 1.8 to 30 MHz. Perforated metal.



### MFJ-264

HF / VHF dry dummy load covers up to 650 MHz, usable to 750 MHz. Rated 1.5 kW for ten seconds, 100 Watts continuous. Perforated metal cabinet. SO-239.

### MFJ-260C

HF / VHF Dry Load is similar to MFJ-264, but handles 300 Watts for 30 seconds. Has derating curve. SO-239.



### MFJ-263

300 W dry dummy load, good to 3 GHz! Mounted on large, heavy-duty air-cooled heatsink. Handles 125 W continuous, 300 W for 10 seconds. Teflon® N connector.



### MFJ-250

1 kW Dummy Load, 50-Ohm. Oil filled, low SWR to 400 MHz. Rated 1 kW CW or 2 kW PEP for 10 minutes. One half rating for 20 minutes. 200 Watts CW or 400 Watts PEP continuous. Includes industrial transformer grade oil (no PCB).



### MFJ-812B

VHF SWR Wattmeter, 2 / 220 MHz, built-in field strength meter. Fwd / ref power in two 30 / 300 W ranges.



### MFJ-815D

Lighted 3 inch cross-needle meter, 1.8-60 MHz, 300 / 3000 W fwd, 60 / 600 W ref. True peak.

## Giants



### MFJ-891

Peak-reading giant 4.5 inch cross-needle SWR / Wattmeter. 20 / 200 / 2000 W ranges. Super bright LED backlight. DC grounded antenna connections. SO-239 connectors. 7.25 W x 4.5 H x 4.5 D.



### MFJ-868

Giant SWR / Wattmeter measures 6.5 inches diagonally across face. Covers 1.8 to 30 MHz. Has 20 / 200 / 2000 W ranges for accurate QRP or QRO operation. MFJ Wattmeter Power Saver™ circuit turns on meter only when RF power is being measured. Covers 1.8-54 MHz. Uses 9 V battery or 12 VDC or 110 VAC with MFJ-1312D.



### MFJ-867

Giant 144 / 220 / 440 MHz Wattmeter. Same size as MFJ-868.



### MFJ-864

Lighted Cross-Needle SWR / Watts, 1.8-60 / 144 / 440 MHz, 30 / 300 Fwd, 6 / 60 Ref. Features separate HF and VHF / UHF directional couplers to connect and monitor separate HF and VHF/UHF transceivers simultaneously.

### MFJ-822

Covers 1.8-200 MHz, 30 or 300 Watts. Cross-needle SWR / Wattmeter for HF / VHF and VHF / UHF (MFJ-842) read forward / reflected power and SWR simultaneously on the huge 3" meter. Perfect for mobile or portable operation. Two selectable power ranges, built-in meter light (+12 VDC). SO-239 connectors. 3-1/4 W x 3-1/4 H x 3-1/4 D inches.



MFJ-860

MFJ-862

MFJ-864

### MFJ-862

Covers 144 / 220 / 440 MHz. 30 / 300 Watts forward, 6 / 60 Watts reflected ranges. 5.64 W x 2.5 H x 2.25 D inches. Has one sensor for all three bands.

## Digital Wattmeter



### MFJ-826B

MFJ's high accuracy digital SWR / Wattmeter / frequency counter measures to 1.5 kW at 1.8-54 MHz. True peak or average forward and reflected Watts, SWR and frequency can be simultaneously displayed. You get three high-resolution forward / reflected power ranges that are automatically selected: a true QRP range (25 Watt full scale), a mid-range (250 Watts full scale) and a high-range (1500 Watts full scale). Each range has excellent resolution. Use 12 VDC or 110 VAC with optional MFJ-1312D. Attractive cabinet measures 6-1/2 W x 2-5/8 H x 6 D inches.



# SWR / WATT METERS

## DIAMOND

### SWR / Watt Meters

Diamond RF SWR / Watt meters cover the full range of amateur applications. The SX-20C and SX-40C are the newest models. The SX-40C can be used on 220 MHz with a correction factor.



**SX-40C**



**SX-1100**

**SX-240**



All models:

- Illuminated meters.
- Require 12 volts DC.
- Low insertion loss generally less than 0.2 dB in HF range and 0.3 dB at higher frequencies.
- Power measurement accuracy generally  $\pm 10\%$  on higher power ranges and  $\pm 5\%$  on the lower.
- Low loss SO-239 connectors are used except for the high frequencies as noted in the table.
- Measurements are forward power, reflected power, SWR and, on selected frequencies, PEP monitor.

### Diamond Meters

Model	Freq MHz	Power Ranges	Con- nector	HRO Price
SX-20C	3.5-30 50-54 130-150	30/ 300 W	SO-239	\$89.95
SX-40C	144-470	30/ 300 W	SO-239	\$79.95
SX-100	1.6-60	30/ 300/ 3KW	SO-239	\$124.95
SX-200	1.8-200	5/ 20/ 200 W	SO-239	\$89.95
SX-240	3.5-30 50-54 130-150 430-450	30/ 300/ 3KW	30/ 300/ 3KW	\$299.95
SX-400	140-525	5/ 20/ 200 W	SO-239	\$109.95
SX-600	1.8-160 140-525	5/ 20/ 200 W	SO-239	\$179.95
SX-1100	1.8-160 430-450 800-930 1230-1300	5/ 20/ 200 W	SO-239 Type N Type N Type N	\$249.95

## Palstar

### PM2000A Wattmeter



The PM2000A measures and displays forward power (up to 2000 W), reflected power, and SWR simultaneously on its dual movement meter system in the frequency range of 1.8 MHz to 60 MHz. Accuracy of the readings is assured because the PM2000A features a true shielded directional coupler. The backlit meter can display either peak or average power readings with a Peak Hold function, and has 300 and 2000 Watt range settings. **PM-2000A HRO Price \$189.95**

The **PM2000AM** mobile version has a remote coupler that can be mounted up to 14' from the display head.

- PL259 coax connector.
- 115 VAC to 12 VDC adapter included.
- Size: 4.5" x 3.25" x 3.25" deep.
- Weight 1.2 lbs. / 0.55 Kg.

### 24 Hour FAX Order Numbers

Anaheim	714-533-9485
Atlanta	770-263-9548
Burbank	818-842-5283
Denver	303-745-7394
Milwaukee	414-358-3337
New Castle	302-322-8808
Oakland	510-534-0729
Phoenix	602-395-1244
Plano	972-424-4969
Portland	503-684-0469
Salem	603-898-1041
San Diego	858-560-1705
Woodbridge	703-494-3679



## DAIWA

### CN-501H

- Cross needle design reads forward, reverse and VSWR simultaneously, no calibration required.
- Easy to read meter.
- PEP monitor function.
- Illuminated meter, 12 VDC plug provided.



	CN-501H
Frequency	1.8 - 150 MHz
Power Range	15 / 150 / 1.5 kW
Power Rating	1.5 kW (1.8-60 MHz) 1 kW (144 MHz)
SWR Detection	4 W minimum
HRO Price	\$99.95



### CN-901HP3 Professional Series

**HRO Price \$189.95**

- Easy to read, illuminated, extra large meter face with mirrored graph in .5 watt increments.
- Cross needle design reads forward, reverse and VSWR simultaneously, no calibration required.
- CN-901HP3 is the new 3000 Watt version.
- 12 VDC plug provided.

### Daiwa 901 Meters

	CN-901 HP3	CN-901 V	CN-801 S-II
Frequency	1.8-200 MHz	140-525 MHz	900- 2500 MHz
Power Range FWD	20 / 200 / 2 kW	20 / 200 W	2 / 20 W
Impedance	50Ω	50Ω	50Ω
Connectors	SO-239	SO-239	N-Type
SWR Detection	5 W minimum	5 W minimum	0.5 W minimum
HRO Prices	\$189.95	\$149.95	\$239.95

## SWR Analyzers



**MFJ-259C**

SWR Analyzer™ with impedance meter reads antenna SWR, complex RF impedance, resistance (R) and reactance (X) or magnitude (Z) and phase (degrees), coax cable loss in dB, coax cable length and distance to fault, return loss, reflection coefficient, inductance and capacitance. Tells battery voltage. Has huge LCD digital readout with built-in frequency counter, side-by-side SWR and RF impedance meters, Ni-Cd / Ni-MH internal battery charger, battery saver feature, low battery warning, and easy-access batteries. Has smooth, reduction drive tuning. Truly portable. Uses 10 alkaline, Ni-Cd or Ni-MH batteries (not included) or 110 VAC with optional MFJ-1312D.



**MFJ-269C**

Covers 530 kHz to 230 MHz plus 415 to 470 MHz HF / VHF / UHF. Has all of the features of the MFJ-259B plus a 12-bit A/D converter (gives much better accuracy and resolution), CoaxCalculator™ (calculates coax line length in feet given

coax length in electrical degrees and vice versa) and coaxial characteristic impedance input (zero to six hundred ohms).

**MFJ-249C**

If digital display is all you need, MFJ-249C does everything MFJ-259C does without analog meters.



## Antenna Analyzers



**MFJ-226  
Antenna  
Expert**

MFJ VNA Antenna Analyzer covers 1 to 230 MHz with 1 Hz resolution. Frequency sweep plots: SWR, Impedance, resistance, reactance, phase angle, complex return loss and Smith Chart. Shows sign of reactance. Features amazing accuracy with OSL (Open-Short-Load) calibration. Easy to read backlit LCD. Fits into your hand perfectly.

**MFJ-266C**

Compact, wide-range analyzer includes the 220 MHz band. Covers 1.5-65 MHz, 104-230 MHz, and 300-490 MHz. Antenna Analyzer mode reads frequency, SWR, complex impedance simultaneously. 500 MHz frequency counter mode has 100 Hz resolution and measures relative field strength/frequency for tracking reference. Signal Generator mode, solid state switching, and electronic tuning. Backlight. N-connector.



**MFJ-223**

1-60 MHz color graphic VNA analyzer. Pocket-sized, with truly accurate SWR, R, X and Z. Vivid TFT multi-color display. Single-frequency and swept-frequency operating modes. Seamless DDS coverage with 100 Hz resolution from 1-60 MHz. Smooth "skip-free" encoder tunes fast or slow without missing a step. Field strength meter measures local signals, detects potential interference. High-lumen output, easy to read in direct sunlight. Easy setup with only four control switches with convenient on-screen soft menus. Personalized ID function programs your call or name onto the display.

Seamless DDS coverage with 100 Hz resolution from 1-60 MHz. Smooth "skip-free" encoder tunes fast or slow without missing a step. Field strength meter measures local signals, detects potential interference. High-lumen output, easy to read in direct sunlight. Easy setup with only four control switches with convenient on-screen soft menus. Personalized ID function programs your call or name onto the display.

# ANALYZERS

## Antenna Analyzer



**CAA500  
MarkII  
1.8-500 MHz  
Antenna  
Analyzer**

Commercial Grade SWR / Impedance Analyzer Range: 1.8 - 500 MHz (including 222 MHz band). Check antenna installations in just seconds. Determine SWR and resonance instantly. New color TFT display permits easy viewing of frequency and band information, even in the dark. Also has a Band Sweep function that allows you to measure SWR across the selected ham band and view it on the display graph.

Makes SWR adjustments quick and easy. Both SWR and impedance measurements are provided simultaneously. Precision analog meter provides SWR / impedance changes in real time. **HRO Price \$439.95**



## Graphic Analyzer



**MFJ-225**

2.5-180 MHz continuous two-port Graphic Analyzer. A compact, completely self-contained handheld graphing analyzer in the field. On the bench, it becomes a full-fledged two-port (S21) desktop machine when teamed up with your PC. Using powerful IG-miniVNA freeware, you can run detailed data analysis and print out stunning color-graphic plots to document your work. Built-in back-lighted 3-inch LCD graphic display. Full screen, easy-to-view SWR bargraph, capture vivid swept displays for SWR, impedance, return loss, phase angle, and more. DDS generator.

**Questions? Call a  
Friendly Ham at HRO.**



## RigExpert ANTENNA ANALYZERS & TRANSCEIVER INTERFACES



### RigExpert AA-55 ZOOM Option Bluetooth Your laboratory in a field!

New AntScope application for Android and new AntScope2 for Netbook allow you to:

- Operate the analyzer remotely
- See the characteristics of your antenna in more detail
- Locate cable faults in TDR mode
- Galvanically isolate the analyzer from the computer
- Share measurement results through social networks



### RigExpert USB Transceiver Interfaces for CW, SSB and Digital modes.

#### Main features:

CAT system; FSK, PTT and CW outputs;  
CW keyer (WinKey); voice recording  
and playback.



**Best  
for FT8!**



Family of RigExpert Antenna Analyzers  
to assemble and test your antennas and cables.

All specifications and features are subject to change without notice or obligation.

[WWW.RIGEXPERT.COM](http://WWW.RIGEXPERT.COM)

## DC Power Strips



**MFJ-1118**

High current multiple DC outlet. Use for two HF and / or VHF transceivers and six or more accessories from your transceiver's main 12 VDC power supply.



**MFJ-1117**

To power four HF / VHF radios (two at 35 amps each and two at 35 combined) simultaneously.



**MFJ-1116**

Deluxe multiple DC power outlet. 8 outlets for powering accessories.



**MFJ-1112** is like the MFJ-1116 without on / off switch, voltmeter and fuse. 6 pair outlets.



**MFJ-1129**

Get the best of both connectors. Has Anderson Powerpoles® and high-current binding posts. Outlets 1, 2, 4-8 are Powerpoles®, outlet 3 is a 35 A high current binding post. Includes 7 pairs of Powerpole® 35A contacts, ten fuses.



**MFJ-1128**

12 outlets, factory installed fuses, handles 20 amps total.



**MFJ-1126**

8 outlets. (12) 35A contacts.



**MFJ-1124**

6 outlets. (8) 35A contacts.

## DC Power Distribution Box



**MFJ-1107**

Four sets of PowerPole® outputs, a total of 40A, one binding post input, 40A. Two 2.1 mm center positive power plugs for accessories. PowerPole® mating connectors included. 4 W x 1.5 H x 2.75 D inches. **HRO Price \$49.95**



## Rig Protection



**MFJ-4402  
for Mobiles**

Protect your mobile rig from many unseen operating problems found in vehicles today. A built in surge protection diode reduces the chance a high voltage spike will damage your rig, and has reverse polarity protection.

MFJ-4402 will shut down your rig if the voltage gets too low for proper vehicle operation. A delay timer, which is controlled off the ignition sense line ensures your rig does not turn on until normal voltage is reached.

MFJ-4402 connects to your rig with Anderson PowerPoles® for high-current lines and a bayonet lug to the ignition sense line. A 30A fuse protects for over-current or reverse voltages. Fits nicely into a vehicle installation with its compact size of 2-7/8 W x 4 H x 1-1/2 D inches.



**MFJ-4403**

Transceiver voltage conditioner provides reverse, over-voltage, voltage transient, and short circuit protections. Gives superb noise and ripple filtering and power supply buffering for your base, portable, or mobile transceiver. MFJ-4403 protects against accidental reverse voltage connection, alerting with a bright warning LED. Once DC polarity is corrected, MFJ-4403 recovers and operates normally.

Heavy duty transient suppressor handles peak currents up to 200A. Four farads of ultra high value capacitors filter off virtually all power supply noise and ripple, and provide power supply buffering. For temporary mobile operation like a rental car, run your transceiver a full 100 W SSB from your 10-15 A cigarette lighter socket. Standard Anderson PowerPole® connectors are used for the DC input and output. Compact 4 W x 3 H x 2 D inches.



**MFJ-4422**

## Volt / Amp Panel Meter

4.5-30 VDC / 30 A Digital Volt / Amp Panel Meter with built in Current Shunt. Connect inline to monitor voltage and current of your mobile radio or accessory. Displays voltage and current simultaneously with dual .28 inch red / blue LED digits. Input / output with Anderson PowerPoles®. Handles up to 30 A. Reverse polarity protected. 3 W x 2 H x 1 D inches.



**MFJ-4424**

## Wattmeter / Power Analyzer

High Precision Wattmeter / Power Analyzer displays Amps, Volts, and Watts continuously from 4.8-60V. Measure current, peak current, power and peak power. Input / output with Anderson PowerPoles®. Backlit LCD display. 3.25 W x 1.75 H inches.

## Mobile Digital DC Voltage Monitors



**MFJ-4431**



**MFJ-4432**

MFJ's new voltage monitors show car battery voltage at all times. Three 3/8" tall bright red LEDs are easily seen day or night. Plug into a cigarette lighter and you are ready to monitor. Use 12 V or 24 V batteries, 8-30 VDC. Built-in fuse. MFJ-4431 comes with a mounted display, adhesive, plug with 2 foot wire. Module is a compact 2-5/8 W x 1-3/8 H x 2-1/4 D. MFJ-4432 is an all-in-one plug/module, 1-1/2 W x 1 H x 4 D.



## MFJ-105D

This is the world's most popular ham radio wall clock! True 24 hour quartz movement. Huge 12-inch black face with large white numerals gives excellent visibility across room. Attractive gold colored hour, minute and seconds hands looks great on any hamshack or other wall! **HRO Price \$24.95**



## MFJ-131RC

Large 12-inch diameter analog atomic wall clock. 12 / 24 hour formats displayed under real glass face. **HRO Price \$39.95**



## MFJ-115

Set this 24 hour Quartz clock to UTC/GMT and you can determine the time in any zone of the world at any time of the day. Premier world cities encircle its colorful world map face to indicate time zone. 12" face is easy to see across room. Seconds hand. **HRO Price \$24.95**

## MFJ-133RC

Dual time zone LCD Atomic Clock lets you read any two time zones in 24 or 12 hour format. Super compact, attractive silver clock folds up and slides in a shirt pocket. **HRO Price \$34.95**



## MFJ-123B

24 / 12 atomic. 2-inch digits. True UTC. Day, date, indoor temperature. Solar powered. 9.5" W x 6.25" H x 1" D. **HRO Price \$49.95**

## MFJ-112B

World map clock, shows 12 or 24 hour time anywhere in the world. Also shows day of week, month, date, and year. Time displays hour / minute / second. Daylight savings time feature. **HRO Price \$29.95**



## Jumbos



## MFJ-139RC

This jumbo LCD clock display boasts giant 4 inch digits. The whole display is 15-3/4 W x 10-3/4 H x 3/4 D inches. Place it on a desk with its convenient flip stand or hang on your wall. You never need batteries for this solar-powered clock. Use 24 or 12 hour time format with MFJ exclusive TrueUTC™ time, including Hawaii and Puerto Rico. Select GMT or other time zone on the map. Turn daylight savings time on or off. Includes an indoor thermometer and hygrometer to read indoor humidity. It displays the month, date and day of the week in one simultaneous look at this handsome clock. Beautiful metallic tan color and bright LCD display. **HRO Price \$74.95**



## MFJ-117

12 / 24 Hour jumbo red LED wall clock. Runs off 110 VAC with 9 V battery time backup. Hour / minute set buttons on front panel. **HRO Price \$39.95**



## MFJ-113

Switchable 12 / 24 hour display with HUGE 1.8" red LEDs. Absolutely shines from across the room. Super compact 3-1/2 H x 9 W x 2-1/2 D in. Nine minute ID timer, alarm, 9 V battery back-up. Use 110 VAC, 60 Hz. Great for the sight impaired! **HRO Price \$19.95**



## MFJ-130BRC

12 / 24 hour wall or desk mount atomic clock. Almost 2 inch high digits can be read from across the room. DST can be disabled to accurately read UTC consistently. Running seconds, month, date, day, and indoor temperature are all displayed. **HRO Price \$24.95**

## Dual Displays



## Radio controlled 24 / 12

## MFJ-148RC

Especially designed clock for amateur radio. this model has two independent atomic 24 / 12 hour clocks with exclusive UTC time zone and a dedicated station ten minute ID timer. A single time base keeps both clocks perfectly synchronized. It is radio controlled so it keeps perfect time. Set each clock independently for 12 or 24 hour display, time zone, and DST on / off. Built-in 10 minute station ID timer with LED and buzzer alerts. Timer resets by a simple press of a switch. Huge 5 W x 1.5 H LCD display with LED backlights. Flip stand for desk display and mounting hole for wall mount. Uses two AA batteries (not included). Sexy black hard plastic cabinet is 6.5 W x 3.5 H x 3/4 D inches. **HRO Price \$59.95**



## 24 / 12 Hour Clock

## MFJ-108B

Dual clock has separate 24 / 12 hour displays. Read UTC and local time simultaneously. Features huge high-contrast 5/8-inch LCD numerals that makes it easy to read across the room. Mounted in attractive solid brushed aluminum frame with sloped face for easy viewing. Synchronize to UTC for split-second timing. Quartz controlled for excellent accuracy. Long life button battery included. 4 1/2 W x 1 D x 2 H". MFJ one year limited warranty. **HRO Price \$21.95**



## MFJ-121B

Read both UTC and local time at a single glance with this dual atomic clock. Displays 24 / 12 hour time simultaneously – set each independently. Automatic backlight lights up every day at your preset time for 8 hours. Mounted in a handsome silver-metallic, hard-plastic frame, it has HUGE, easy-to-see 1 W by 2 H inch LCD numerals, an exclusive UTC zone and running seconds display. 11-3/8 W x 7-1/4 H x 1 D mounts on wall or desk mount. Daylight savings time can be disabled independently in each clock display. Uses four AA batteries. **HRO Price \$69.95**

## Morse Practice



### MFJ-554

The world's finest code practice oscillator is designed for demanding classroom use and abuse. It produces a true pure sine wave side tone with no trace of harsh key clicks. You'll hear the clearest, sweetest sounding CW you have ever heard. Delivers full 1 Watt into built-in 3" speaker – fills an entire room. Low distortion – less than .2% total harmonic distortion from its BTL (Bridge-Tied-Load) amplifier. Volume control, 400-1000 Hz tone control, on/off switch, power on LED, 1/4 inch key jack, 3.5mm external speaker jack uses 12 VDC. All metal enclosure. **HRO Price \$99.95**



### Morse Reader MFJ-461

Decodes and displays Morse code on two-line high-contrast LCD. Just hold close to receiver. 3-60 WPM. Use 9V, not included. **HRO Price \$79.95.**



### Morse Tutor MFJ-418

Morse Code Tutor has all of the practice you will ever need built into a microprocessor. Work from a beginner to master! 3-60 WPM. Use 9V, not included. **HRO Price \$89.95.**



### Code Oscillator MFJ-557

Practice sending Morse code. Telegraph key, code oscillator, speaker on heavy non-skid steel base. Volume / tone controls. Use 9V battery. **HRO Price \$39.95.**

## Keyers



### MFJ-434B

A microprocessor-controlled voice keyer that sends your call and does contest exchanges in your own natural voice. Store frequently used phrases, repeat messages continuously, use 8-pin modular or 8-pin round microphone plug. Record and play back off-air signals. **HRO Price \$189.95**



### MFJ-464

Keyer / Reader. They won't know you never passed the code test! Sends / reads 5-99 WPM. Auto speed tracking. 2-line LCD. Use paddle or keyboard. Easy menu operation. Front panel speed, volume controls. **HRO Price \$174.95**



### MFJ-495

The MFJ-495 Memory Keyer is a full-featured memory keyer combining dual microprocessors and a nonvolatile EEPROM chip for a full featured, low cost, high reliability design. Unlike other keyers, it uses a LCD display to set keyer functions and show the sending message. The MFJ-495 keys CW from a paddle, a keyboard and a serial computer interface. All code parameters are changed with an easy to use menu interface shown on the LCD display. **HRO Price \$169.95**

## Lambic Paddles / Keys



### MFJ-564 Chrome MFJ-564B Black

Chrome lambic paddle features a full range of adjustments in tension and contact spacing, self-adjusting nylon and steel bearings, contact points that almost never need cleaning, precision machine frame and non-skid feet on heavy base. **HRO Price \$84.95 each**



### MFJ-561

Miniature, light-weight lambic paddle fits into an Altoid® tin! Precision formed, perfect for traveling. **HRO Price \$24.95**

## Straight Key



### MFJ-553

Deluxe wood base features a Morse code straight key on a non-skid, beautifully stained wood base. A steel under-plated bottom makes it stay on your table. 3' cable with 3.5 mm plug. Handsome. **HRO Price \$29.95**

*Ham Radio Outlet carries  
many more MFJ items which can be found  
throughout this catalog and on our website at  
[www.hamradio.com](http://www.hamradio.com)*




*Quality and Pride Throughout*

## "Vibrokeyer"

The Vibrokeyer is designed for those who prefer a non-iambic paddle. The single lever paddle imitates the automatic dots and dashes of the electronic keyer with the same motion used to operate the "Bug."

**Vibrokeyer Deluxe:** Highly polished decorative chrome base with bright chrome top parts. Silky smooth movements are jeweled as in fine Swiss watches. **HRO Price \$189.95**


**Vibrokeyer Standard:** A neat, crisp black textured finish base with bright decorative chrome parts. Non-jeweled movement. **HRO Price \$154.95**

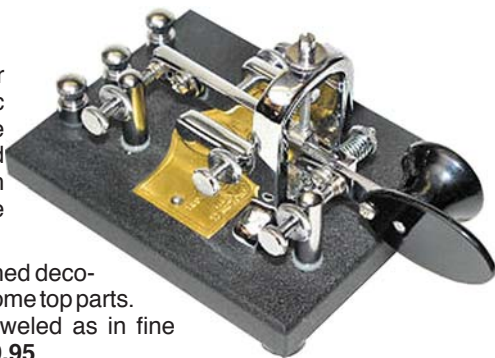

## "Original"

The Original Vibroplex is a genuine piece of history. First patented in 1894, the Original is still manufactured today using tools and dies very similar to those used by its inventor, Horace G. Martin. Modern-day operators can put their fist to the same equipment as the Western Union and railroad operators of old.

**Original Deluxe** pictured: **HRO Price \$249.95**

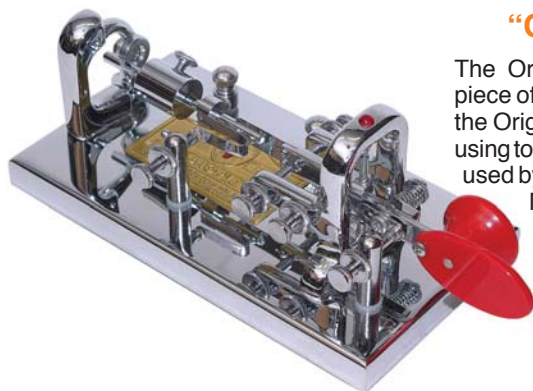


## "Iambic"

This is the modern descendant of the Original. It incorporates the traditional Vibroplex look for use with modern electronic keyers.

**Iambic Deluxe:** Same as Presentation but without the 24K gold plated brass plate. **HRO Price \$199.95**

**Iambic Standard:** A neat, crisp black textured finish base with bright decorative chrome top parts. **HRO Price \$159.95**

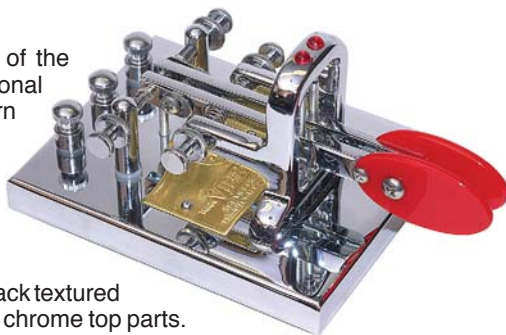

## "Straight Keys"

Vibroplex® offers a STRAIGHT key with a unique mechanical action, unlike any other straight key that has ever been manufactured.

**Straight Key Deluxe:** Highly polished chrome base with decorative chrome top parts. **HRO Price \$189.95**

**Straight Key Standard:** A neat, crisp black textured finish base with bright chrome top parts. **HRO Price \$149.95**



## "Vibrocube"



The Vibrocube registers just under 6 pounds on the scale. It is a large paddle that stays in place on the desk and accommodates a large hand comfortably. The base is USA-forged cold-rolled steel, upper components are zinc, steel and brass. The finger pieces are hard red acrylic. Instead of magnetic tensioning, we use a spring loaded method which provides a greater range of possible tension settings than magnets allow.

**Vibrocube Standard:** **HRO Price \$189.95**

**Vibrocube Deluxe:** Like the Standard version with jeweled upper and lower trunion screws, an all-chrome base and all-chrome top components **HRO Price \$289.95**

## "Code Warrior Jr"



The Code Warrior Jr. is a small footprint, steel base key with brass top parts and silver tipped copper contacts. Practical for home or portable use. Magnetic return action for wide range of tension adjustment. Weighs just 1 lb 10 oz. Budget priced. Available with black or blue base.

**Code Warrior Jr:** **HRO Price \$99.95**

## "Chrome Warrior Jr"




The Chrome Warrior Jr. is identical to the Code Warrior Jr. but has a decorative bright chrome polished steel base.

**Chrome Warrior Jr:** **HRO Price \$139.95**

## VIBROPLEX®

The high-quality **Bencher** product line is now part of the oldest name in Ham Radio, Vibroplex.

### RJ Series Hand Keys

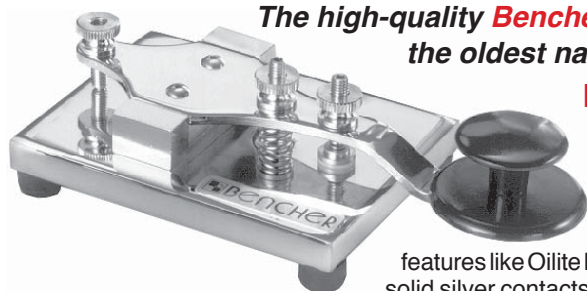

The "RJ" hand keys have an advanced American-style design derived from the telegraph keys that won the west, yet with modern

features like Oilite bearings, a solid navy knob, gold-plated solid silver contacts, full locking adjustments of all tension

and spacing parameters, and Bencher quality materials throughout. These keys are ideal for the new amateur just mastering code as well as the old time brass pounder anxious to "clear the hook." This key offers the Morse code operator an investment that will bring years of pride and satisfaction. Try the Bencher "RJ" hand key at your nearby HRO. You will be convinced there is no better key available. **HRO Prices: RJ-1 Black \$139.95; RJ-2 Chrome \$159.95**



### Hex Key


Gold plated silver contacts. Molded acrylic finger paddles. Polished chromium parts. Magnetic tension adjustment and adjustable contact spacing. Black powder coated steel base. **HRO Price \$299.95**

### ST Series Single Lever Paddles

Superb Bencher features and construction for the ham who prefers single lever operation.

**HRO Prices:**

ST-1	Black	\$139.95
ST-2	Chrome	\$154.95

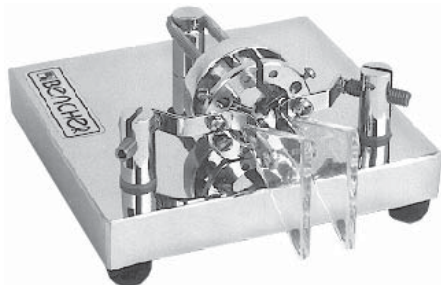

### BY Series Iambic Paddles


You will enjoy the smooth, precise action of a Bencher paddle with any iambic keyer. These paddles feature a heavy steel base, gold plated silver contact points, non-skid feet, stainless steel adjustable spring, self-adjusting needle bearings, and large acrylic finger paddles.

**HRO Prices:**

BY-1	Black	\$164.95
BY-2	Chrome	\$199.95


## KENT

### Paddles



Kent paddles offer a smooth feel with sealed ball bearings.


Precise gap adjustments with knurled heads on fine pitched screws and locking nuts. Made from solid brass within a permanent brass housing.



Twin Paddle	(TP-1)	\$164.95
Single Paddle	(SP-1)	\$159.95

### Straight Key

Straight Key	(SK-1)	\$154.95
--------------	--------	----------

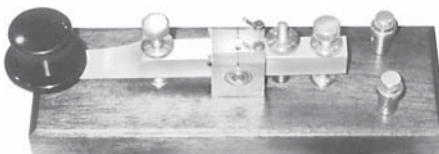

**Call HRO Toll Free  
for Quotes  
and Specials**

## SCANNER MASTER

(Radios not included)



**DESK-MT-BASE-4**  
Desk mount for 4 base scanners.  
**HRO Price \$79.95**

### DESK-MT-BASE-3

Desk mount for three base scanners.

**HRO Price \$69.95**



**DESK-MT-BASE-2**  
Desk mount for two base scanners.

**HRO Price \$59.95**

### DESK-MT-PORT-3

Desk mount

for three portable scanners. **HRO Price \$59.95**



### DESK-MT-PORT-2

Desk mount

for two portable scanners. **HRO Price \$49.95**



**DESK-MT-PORT-1**  
Desk mount for one portable scanner.  
**HRO Price \$39.95**





# EQUIPMENT MOUNTS

# DESK STANDS



Radios are NOT included. They are shown for illustration purposes only.

## The BUG Mount LM-900

shown with optional radio

The BUG is a mount for securing small, narrow profile radio control heads for Satellite radios, (both XM and Sirius); VHF radios, HAM radios and more. **HRO Price \$19.95**



## Floor Mount LM-300

This mount has a 15" Gooseneck Swivel Mounting Pedestal, allowing you to place your device in the perfect position for optimal viewing. Just loosen the passenger seat bolt, slide the mount bracket under the bolt, tighten the bolt. The mount comes with a 4 hole AMPS plate to mount remote heads. **HRO Price \$26.95**

## Bean Bag Dash / Windshield Mount w / Side Grip Holder LM-2500H

The bean bag mount weighs 2 pounds and has a non-skid surface on one side. On the other side is a plate designed for the LM-500 mount suction cup to attach to. The Gripomatic side grip holder has padded arms that hold your transceiver. **HRO Price \$39.95**



## Bean Bag Dash Mount

LM-25

The bean bag includes a safety loop and plastic hook to ensure stability of the weighted friction dash mount. The open design in the front of the mount allows for viewing your entire GPS. **HRO Price \$19.95**



## Adapter for Yaesu FTM-350 LM-AD1

Adapter kit for the FTM-350 remote display head and similar (including Icom) remote display heads that use the camera style threaded socket to hold the display head to the mount. The kit is



sold separately and attaches to all the Lido Mounts. **HRO Price \$8.95**

## Vent Mount LM-100

The vent mount has a 4 hole AMPS pattern that can be attached to Alinco, Icom, Kenwood and Yaesu remote head brackets. Swivel 360 degrees for optimal viewing. The vent mount can be installed or removed in seconds. Fits most horizontal vent louvers. It does not work on the large circular vents like those found in Mustangs and PT Cruisers. **HRO Price \$14.95**



## Vent Mount w/ Side Grip Holder LM-100H

The vent mount includes a side grip holder for some Kenwood and Icom remote heads. The grip has padded arms and can handle devices from 1 7/8 inches to 4 1/4 inches in height. Easily remove your device to store out of sight when you reach your destination. For use with horizontal air vent louvers. **HRO Price \$24.95**



## Cup Holder Mount LM- 801EXP

The Cup Holder mount works for either an HT or a remote radio head. A flywheel control on the top of the base allows the user to adjust the mount to just about any size cup holder. The mount stands 5 1/2 inches tall and can be installed or removed in seconds. **HRO Price \$24.95**



## UltiMount LM-700

The UltiMount installs in seconds and can be swiveled, rotated and adjusted to virtually any position. Secured with a flexible pad that has 3M automotive adhesive on the back, the UltiMount can be removed without leaving any residue. **HRO Price \$24.95**

# Nifty!

## Desk Stands



Radio not included

The HT Desk Stand sports a glossy jet black finish. Main support plate and shelf are made of tough, durable polycarbonate and the steel base has a heavy-duty powder coat finish. This thing looks great! Adjustable to fit all hand held radios. Provides solid stable support, holding the radio at a convenient viewing and operating angle. **HRO Price \$35.95**



Our Universal Wire Bale Stand can be used with any radio equipped with a foldable wire stand, providing an ideal angle for viewing the display and working the controls. It can be used with any radio having a foldable wire stand, including the FT-991, IC-7300, IC-7000, IC-718, TS-2000, TS-590, K3, K3S, DX-SR8T **HRO Price \$19.95**



Radio not included




Desk Stands are custom designed to perfectly fit your radio, providing an ideal angle for viewing the display, and stable support for touching buttons on the screen and working the controls. Your radio securely attaches to the stand using two thumbscrews for the mounting holes at the back of the control head. An additional four rubber feet are provided for use with the main body of the radio allowing it to also be placed on the desk top.

<b>HRO Price</b>	Icom ID-5100	<b>\$25.95</b>
<b>HRO Price</b>	Icom IC-2730	<b>\$25.95</b>
<b>HRO Price</b>	Elecraft PX3	<b>\$23.95</b>
<b>HRO Price</b>	Yaesu FTM-400DR	<b>\$24.95</b>

## Radio Manuals

### Nifty Mini-Manuals

Mini-Manuals are fully laminated, spiral bound booklets, 4.25 x 8 inches, providing simplified step-by-step instructions for all your radio's features. These short-form manuals are smaller, more durable, and easier to use than manuals normally supplied with a radio.



#### Kenwood


Model	Mini-Manual Description	HRO Price
NIFTY-TH-D72A	Mini Man + Ref Card	\$24.95
NIFTY-TH-K20/K40	Ref Card TH-K20/40	\$6.95
NIFTY-TH-D74A	Mini Man + Ref Card	\$24.95
NIFTY-TM-D710A	Mini Manual TM-D710A	\$19.95
NIFTY-TM-V71A	Mini Manual TM-V71A	\$18.95
NIFTY-TS-2000	Mini Manual TS-2000	\$18.95
NIFTY-TS-480S/HX	Mini Manual TS-480	\$18.95
NIFTY-TS-590S/G	Mini Manual TS-590S/G	\$19.95

#### MFJ

Model	Mini-Manual Description	HRO Price
NIFTY-MFJ259C	Mini Manual MFJ-259C	\$12.95
NIFTY-MFJ269/C	Mini Manual MFJ-269/C	\$12.95

#### Miscellaneous

Model	Mini-Manual Description	HRO Price
NIFTY-MM-BandPlan	Amateur Radio Band Plan	\$10.95
NIFTY-D-STAR-BOOK	E-Z Guide to D-Star Operations Book	\$15.95
NIFTY-DXGUIDE	DX Field Guide Book	\$17.95
NIFTY-PSK31-BOOK	E-Z Guide to PSK31 Operations	\$14.95
NIFTY-RADIOMG	Radio Monitoring Guide	\$15.95
NIFTY-ECHOLINK-BOOK	Guide to Echolink	\$15.95
NIFTY-K3	Mini Manual Elecraft K3	\$22.95
NIFTY-KX2	Mini Manual Elecraft KX2	\$20.95
NIFTY-KX3	Mini Manual Elecraft KX3	\$22.95
NIFTY-P3	Mini Manual Elecraft P3	\$10.95



### CQ DX World Guide

by Franz Lagner, DJ9ZB

The third edition is the first using color throughout and the first to be entirely in English. It has entries for more than 300 DX "entities." Information includes geographical location, WAZ and ITU zones, ITU callign allocations, and amateur prefixes. Each listing also has a map and flag, plus information on the country's licensing agency and national amateur radio society. Listings also include call areas, IOTA information and representative QSL cards. The Guide will be available in both print and digital (CD) formats. HRO Price \$39.95 in print and \$22.95 on CD.

#### Yaesu / Wouxun

Model	Mini-Manual Description	HRO Price
NIFTY-FT450D	Mini Manual FT-450D	\$20.95
NIFTY-FT857/D	Mini Manual FT-857	\$16.95
NIFTY-FT991A	Mini Manual FT991A	\$22.95
NIFTY-FTdx1200	Mini Manual FTdx-1200	\$22.95
NIFTY-FT2DR	Mini Manual FT-2DR	\$24.95
NIFTY-FTdx3000	Mini Manual FTdx-3000	\$22.95
NIFTY-FTdx5000/DMP	Mini Manual FTdx-5000	\$22.95
NIFTY-FTM-100DR	Mini Manual FTM-100DR	\$22.95
NIFTY-FTM-3200DR	Mini Manual FT-3200DR	\$16.95
NIFTY-FT7900R	Mini Manual FT-7900	\$16.95
NIFTY-FT8900R	Mini Manual FT-8900	\$16.95
NIFTY-FT60R	Ref Card FT-60R	\$6.95
NIFTY-FT250R	Ref Card FT-250R	\$5.95
NIFTY-FT270R	Ref Card FT-270R	\$6.95
NIFTY-FTM400DR	Mini Manual FTM-400DR	\$22.95
NIFTY-VX6R	Mini Manual + Ref Card VX6R	\$20.95
NIFTY-KGUV3	Ref Card KGUV 1/2/3	\$6.95
NIFTY-KGUV6 Amateur	Ref Card KGUV6 series	\$6.95
NIFTY-KGUV8	Dual Card Set KGUV8	\$7.95

#### Alinco

Model	Mini-Manual Description	HRO Price
NIFTY-DJ-500T	Ref Card DJ-500T	\$5.95
NIFTY-DJ-G7T	Mini Manual DJ-G7T	\$22.95
NIFTY-DX-SR8	Mini Manual DX-SR8T	\$16.95
NIFTY-DR-135/235/435	Ref Card DR-135/235/435	\$6.95
NIFTY-DR-635T	Mini Manual DR-635T	\$19.95

#### Icom

Model	Mini-Manual Description	HRO Price
NIFTY-IC-T70A	Ref Card IC-T70A	\$6.95
NIFTY-IC-2820H	Mini Manual IC-2820H	\$20.95
NIFTY-IC-718	Mini Manual IC-718	\$16.95
NIFTY-IC-7300	Mini Manual IC-7300	\$22.95
NIFTY-IC-7200	Mini Manual IC-7200	\$16.95
NIFTY-IC-7100	Mini Manual IC-7100	\$26.95
NIFTY-IC-7600	Mini Manual IC-7600	\$24.95
NIFTY-IC-7610	Mini Manual IC-7610	\$24.95
NIFTY-IC-7800	Mini Manual IC-7800	\$24.95
NIFTY-IC-9100	Mini Manual IC-9100	\$22.95
NIFTY-ID-31A	Mini Manual + Card ID-31A	\$24.95
NIFTY-ID-51A Plus 2	Mini Manual + Ref Card	\$24.95
NIFTY-ID-4100	Mini Manual ID-4100	\$25.95
NIFTY-ID-5100	Mini Manual ID-5100	\$24.95



## Gordon West

### Study with the Best!

Part Number	Description	HRO Price
-------------	-------------	-----------

#### Study Manuals

GWTM	Technician Class Book	\$24.95
GWTW	Technician Audio Theory Course on 4 CDs	29.95
NCS	Tech Book plus Software Package	34.95
GWGM	General Class Book	24.95
GWGW	General Audio Theory Course on 4 CDs	29.95
GWEM	Extra Class Book	29.95
GWEW	Extra Audio Theory Course on 6 CDs	44.95
ECS	Extra Book plus Software Package	44.95
HOS	W5YI Ham Operator Software – no books	29.95
HOSB	W5YI Ham Operator Software plus 3 books	99.95
GUS	General Book + software	29.95

#### Morse Code Study Materials

GW05	Morse Code 0-5 wpm 8 CDs	39.95
GW13	Morse Code 6-16 wpm 8 CDs	39.95
GW20	Morse Code 10-28 wpm 8 CDs	39.95
GWCT	CW Refresher Course 0-5 wpm, 2 audio CDs	14.95

#### Other Books

GSE	Getting Started in Electronics	19.95
MINI-1	Mini Notebook, Vol. 1: timer, op amps, optoelectronic circuits and projects	12.95
MINI-2	Mini Notebook, Vol. 2: science and communication circuits and projects	12.95
MINI-3	Mini Notebook, Vol. 3: electronic sensor circuits and projects	12.95
MINI-4	Mini Notebook, Vol. 4: electronic formulas, symbols and circuits	12.95
BELC	Basic Electronics	19.95
BDE	Basic Digital Electronics	17.95
BCE	Basic Communications (analog) Electronics	17.95
GROL	Get Your Commercial Radio License – Book	49.95
GRSP	Get Your Commercial Radio License – Book plus W5YI Study Software Package	79.95



## Nifty E-Z Guide to EchoLink Operation



Full featured Repeater Linking  
EchoLink Mode Tests  
Call Sign, Software Installation and Configuration  
Setting up Repeater Links and Transmitters  
Using the Console Computer and Transmitter  
Setting up Repeater DTMF EchoLink Controls  
Establishing Your Own Simplex and Repeater Nodes  
Link Transmitters and PC Interfacing Methods

Bernie Lafreniere, N6FN

## Nifty E-Z Guide to EchoLink™ Operation

This ideal reference for those getting into EchoLink shows how to make contacts using your computer or DTMF equipped transceivers.

- Straight forward, simple explanations for both beginning & experienced users.
- Voice over Internet technology.
- EchoLink computer users, simplex links, and repeaters.
- Installing and using EchoLink software.
- Call sign validation and authentication.
- RF Link transceiver requirements.
- Establish RF EchoLink simplex and repeater nodes.
- Create a node by interfacing your transceiver to a computer.
- Configure EchoLink's sysop setup menus.
- Add EchoLink capability to a repeater.
- Numerous clear illustrations.

HRO Price \$15.95

## QSL Holders

### QuickView

HRO Price: \$14.95



### International

HRO Price: \$14.95



## Flash Cards

### Flash-and-Pass

Study for your license exams with these easy-to-use Flash and Pass study cards.

#### Technician Class Flash Cards

Flash-TECH HRO Price \$29.95

#### General Class Flash Cards

Flash-GEN HRO Price \$39.95

#### Extra Class Flash Cards

Flash-EXTRA HRO Price \$39.95



## U.S. Repeater Map Book 17th edition USRG



The PERFECT traveling companion. Road maps show major highways and cities in every state. Amateur radio repeater frequencies are included. This is a must for truckers and travelers. Enhanced maps provide great highway detail. **HRO Price \$17.95**

## Ham Adventures

### The Road Home by Andrew Baze



Do you love an adventure? Especially when it includes ham radio in emergency communications, disasters and peril? Do you know any young adults who might be interested in radio? Would you like to learn more about disaster preparedness? Entertaining and informative for young and old alike, this well-reviewed book will hook you from the beginning and take you on a boy and father's trek back from the wilderness to the broken city where the rest of the family waits, unaware of the other danger lurking on their doorstep. **HRO Price \$12.99**

## Personal Emergency Communications

by Andrew Baze



Do you want to be prepared for the next power outage or a natural disaster? This book is written for everyone — no radio expertise required! It will tell you how to make your own realistic, simple emergency communication plan. When the chips are down, what will you do if your cell phone, land-line, and the Internet don't work? This book has the answer! **HRO Price: \$14.99**

## Ham Radio For Dummies

Hams do cool things like talking to folks around the world and helping with communications during emergencies. If hamming it up sounds like fun, here's the scoop, including licensing requirements and how to set up a station. And if you're already licensed, this book will help you start sounding (and feeling) like a pro!


### The Dummies Way

- "Get in, get out" information.
- Explanations in plain English.
- A dash of humor and fun.
- Cheat sheet.
- Icons and other navigational aids.
- Top ten lists.

### Discover how to:

- Set up a radio shack.
- Learn ham jargon.
- Be a ham on the go.
- Prepare for the license exam.
- Communicate on air.
- Help in an emergency or natural disaster.


HRO Price \$21.99



## Tower Guide

### Up the Tower

*The Complete Guide to Tower Construction*  
by Steve Morris, K7LXC



This is the first tower book of its type ever published. It includes abundant information on all aspects of tower construction, use, and care from the foundation to the antenna installation. Steve Morris gathered this collection of invaluable information during his years as a professional installer of amateur and commercial towers. Read about regulatory concerns, guy wires, safety equipment, and more. **HRO Price: \$32.00**

## Ham Magazines

CQ  
QST

CQ Monthly  
QST Monthly


## CQ Publications

**ARC2019** Amateur Radio Calendar 2019  
**UBAUBAU** Understanding Building & Using Baluns & Ununs  
**LMOA** Lew McCoy on Antennas  
**DXWG** DX World Guide  
**HFANTHB** HF Antenna Handbook



# ARRL BOOKS

## The ARRL Handbook for Radio Amateurs



The ARRL Handbook is the most widely used one-stop-reference and guide to radio technology principles and practices. Now in its 96th edition The Handbook continues to advance the pursuit of experimentation and innovation by radio amateurs and professionals. Each edition contains new and useful material to support Amateur Radio activity from the traditional short- and long-wave frequencies through microwaves!

### New Projects

- Simple SLA float charger.
- Amateur Radio data platforms.
- Latest information on WSJT-X digital modes by the WSJT team.
- Filter and circuit design software.
- Update on solar cycle 24.
- Designing dual-band loaded dipoles.

Softcover #0710 HRO Price \$49.95



## Handbook Boxed Set

### Limited Edition

The 2019 Handbook divided into six volumes and presented in a hard slip case.

HRO Price \$64.95



## Operating Manual

### 11th Edition

Everything you need to know about ham radio operating. Four sections: Basic Station and Operating Techniques; Radio Clubs and Public Service;

On-Air Activities and Radiosport; Resources for the Active Ham. #0598 HRO Price: \$24.95



## ARRL MAPS

- Map North America Azimuthal #7717
- Map North America Robinson #8804
- Map North America #8977
- GRID ATLAS Grid Locator Atlas #2944
- GRID MAP Grid Locator Map #1290


## ARRL LISTINGS

- DXCC LIST Official ARRL DXCC List #0840
- LB Log Book #1250
- RD Repeater Directory #0758

## Study With ARRL

### Use ARRL License Manuals with ARRL Online Exam Review for Ham Radio

## Ham Radio License Manual



Includes the latest complete question pool with answer key and explanations for use to pass the 35-question license test. Designed for self-study or classroom use. Take as many


randomly-generated practice exams as you want. Discover the unique mix of technology, public service, convenience, and fun that make up ham radio. A new spiral bound edition is available separately.

#0871 HRO Price \$29.95

#0826 Spiral Bound \$32.95

## General Class Ham Course

### The fastest way to General Class License 8th Edition




Covers all material you need to pass the General Class License exam. Each topic is divided into bite-sized lessons with colorful illustrations covering procedures, practices, regulations, components, circuits, equipment, propagation, electrical safety and more. Go to ARRL's online service to review topics and take practice exams with the same number and variety of questions that you'll encounter on exam day. A new spiral bound edition is available separately.

#0307 HRO Price \$29.95

#1904 Spiral Bound \$29.95

## Extra Class License Manual Revised 11th Edition



Our expert instruction leads you through all the knowledge needed to pass the 50-question Extra Class exam: rules, specific operating skills and more advanced electronics theory. To upgrade you must already hold a General Class license then pass a written examination. A new spiral bound edition is available separately.


#0451 HRO Price \$29.95

#0550 Spiral Bound HRO Price \$29.95

## Tech Q&A

Take a quick, easy path to your first ham license. Pass the 35-question Technician class examination by studying this question pool with brief, clear explanations.


7th Edition \$17.95



EXTRA Q&A \$17.95

GENERAL Q&A (5th ed) \$17.95

FRAR FCC Rules & Regs \$7.95




## Radios to Go!

There is a wealth of features in the latest handhelds. Many of the features are hidden and it is not easy to get full benefit from your investment. This publication is


an essential guide. #3077 HRO Price: \$15.95

## Your First Amateur Radio HF Station

Here is practical advice on choosing your first radio, antenna, computer, software, and accessories. Explains the best way to set them up, how to safely hook up to power while protecting your gear. Explains where to put your priorities. #0079 HRO Price: \$19.95



## Morse Code Operating for Amateur Radio



### Don't Just Learn Morse Code, Master It!

If you are new to Amateur Radio or high frequency (HF) operation, or even if you've been operating HF phone and RTTY but were reluctant to try Morse code, this book is especially for you. It is your



introduction into the fascinating world of radio communication by Morse code, now simply called "CW." It discusses how to get started in the hobby, the advantages of using Morse code, how to set up your station for CW and how to adjust your Morse code key. Learn the protocols and techniques unique to CW operating and gain the confidence to try out your new skills on the air! #0004 HRO Price \$17.95



# ARRL BOOKS FOR AMATEURS

## Understanding Your Antenna Analyzer

A radio amateur's guide to understanding antenna analyzers. #2889  
HRO Price \$22.95



## Hands On Radio Experiments

These experiments, devised by H. Ward Silver, NOAX, first appeared in QST's "Hands-On Radio" column

from 2003-2012. This book combines the original Volumes 1 and 2—covering a wealth of topics designed to educate today's radio experimenters, and inspire others who want to learn what makes their radios work. Even seasoned experts will encounter new approaches to practical methods, new explanations for familiar topics, and new ideas that will enhance your understanding of the radio art. #0857 HRO Price \$29.95

## MORE TECHNICAL BOOKS

EMRFD Experimental Methods in RF Design  
HK Hints and Kinks (18th ed.)  
LBD Low Band DXing (5th ed.)  
RFE RF Exposure and You  
RFI Radio Frequency Interference



## More Arduino Projects for Ham Radio

This book includes 15 completely new practical and functional Arduino projects. Each project is complete and functional as-is, but room has been

left for you to add personal touches and enhancements. That's part of the fun of the Arduino and Open Source communities—building on the work of others and sharing your designs for others to learn, modify, and improve.

Some projects include:

- Auto on/off mobile power control.
- Station power monitor.
- AC current monitor.
- Load tester.
- Voice memory keyer.
- Wireless remote coax switch.
- Wireless remote telemetry.
- Yaesu rotator controller modification.
- 1 to 30 MHz DDS VFO.
- Antenna SWR analyzer.
- 40 Meter QRP CW transceiver.
- 40 Meter QRP JT65 transceiver.



#0703 HRO Price \$34.95

## Antennas

### Antenna Book

23rd Edition

The ARRL Antenna Book describes hundreds of antenna designs: wire, vertical, portable and mobile, and new high-performance VHF/UHF Yagi designs. Radio amateurs continue to make contributions to the state of the art in antenna design and construction. Includes all of the fully searchable text and illustrations in the printed book, plus utility programs and supplemental content from expert contributors. Includes New Projects and new information. #0444 HRO Price \$49.95




## Portable Antenna Classics

For amateurs who are unable to install permanent outdoor antennas at home, portable installations are often the only way they can get on the air. There are also

amateurs who simply enjoy operating outdoors, in nature. For them, portable antennas are necessities #0345 HRO Price: \$19.95

## Antenna Compendium

Volume 8




Inside are 60 articles from QST magazine featuring practical ideas, tips, and some of the best antenna projects. You'll find designs such as the Handy Yagi Antenna, Compact 40 Meter HF Loop, 20 and 40 Meter

verticals on "autopilot," and much more. #0991 HRO Price \$24.95

## Magnetic Loop Antenna

It starts out by providing a theoretical description of magnetic loop antenna (MLA), including a calculation example. Next it describes several types of unique magnetic loop antennas. The final part is devoted to the independent evaluation of magnetic loop antennas. #2002 HRO Price: \$29.95



## MORE ARRL ANTENNA BOOKS

ACVOL5 Antenna Compendium Vol. 5  
ACVOL7 Antenna Compendium Vol. 7  
RSGB-SA Stealth Antenna Book

## Raspberry Pi 2 Workshop Manual




The Raspberry Pi Manual is the perfect introduction to the affordable small computer. Covers the Raspberry Pi 2 (model B). It is aimed at those switching on their Pi for the first time, guiding them through the full process of setup and configuration.

The manual then introduces various aspects of computing and programming, and provides a variety of recipes to demonstrate the acclaimed versatility of the Raspberry Pi's hardware and software. #1022 HRO Price \$28.95

## Best of The Doctor Is In

In Volume 1 of this series, we've gathered the most frequently asked questions, as well as Joel's detailed answers, on the topic of antenna systems. Many answers include comprehensive illustrations. #0741


HRO Price: \$19.95



## Get On The Air with HF Digital

This is a step-by-step guide that'll get you started in the fascinating world of HF digital technology. This book will show you how to set up and operate your own HF digital station. It's a fun and easy way for beginners to get on the air!

#0833 HRO Price: \$19.95




## Work The World with JT65 and JT9

Explore a New World of Digital Communication. You don't need high power or large antennas with JT65 or JT9. Shows you how to assemble an effective station and configure the software. #0437 HRO Price: \$15.95




## Portable Operating for Amateur Radio



A new generation of compact, full-featured, portable radios combines with modern battery technology to make it easier than ever to set up your station

#0802 HRO Price: \$19.95

# FIND A REPEATER



## ARRL 2018-19 Repeater Directory



The 2018 Repeater Directory is the second edition to include "crowdsourced" listings contributed by users, repeater owners, and volunteer frequency coordinators. This means more listings updated more often.

- Updated 31,000 entries with listings for US and Canada.
- Digital repeaters including FM, FUSION, D-DTAR, DMR, NXDN and P25 systems.
- VHF / UHF and microwave band plans included.
- \* Spiral "lay flat" binding. #0758 **HRO Price: \$17.95**

## ARRL Periodicals DVD



## Periodicals DVD Sets

**NEW!**

ARRL's popular journals are available on a compact, fully searchable DVD. Every word and photo published through 2017 is included.

- **QST** The official membership journal of ARRL.
- **NCJ** National Contest Journal.
- **QEX** Forum for Communications Experimenters.

Search the full text of every article by entering titles, call signs, names - almost every word. SEE every word, photo (including color images), drawing and table in technical and general-interest features, columns and product reviews, plus all advertisements. Print what you see or copy to other applications. Requires Adobe Acrobat™ Reader a free download from [www.adobe.com](http://www.adobe.com). For Windows and Macintosh systems. **HRO Price \$24.95**

Software is sold on a non-returnable basis. Any software problems will be resolved under the terms of the manufacturer's warranty.

## Catalog Prices

HRO discount prices shown are current as of September 1, 2018, when this catalog was assembled.

Prices change both up and down. Please be sure to call one of our toll-free numbers or check our Web page for the latest prices. We at HRO strive to offer the most competitive prices in the industry on a full line of quality ham radio products.

Many manufacturers offer "coupons" or similar promotions. Call or check our Secure Web Page at <http://www.hamradio.com> for the latest promotions.


# BUCKMASTER INTERNATIONAL, LLC

## HamCall™ DVD


**HRO Price \$49.95**

The first and only database with more than 2,320,000 callsigns; it is the most complete callsign database available. Includes 6 months of internet updates and HamCall.net Gold Password for full access to HamCall.net website including callsign search, advanced search, and DX Spots.

- More than 2,300,00 US and international listings.
- 174,000 e-mail addresses, 7,500 photos and QSL cards, 134,000 vanity calls and 157,000 QSL managers.
- Includes callsign, class, name, address, license issue and expiration dates, birth date, lat/long, grid square, county, time zone, area code.
- Calculates heading and distance, short and long path.



- Install to hard drive or run from DVD.
- Country flag & map for each call sign.
- Search by callsign, class, name, street address, city, state, postal code, county, country, or QSL manager.
- Double click on e-mail address to send email or a web address to visit it.
- Interactive world map display.
- Prints mailing labels or all information.
- Supported by more than 40 logging programs and software packages.



## Radio Amateur Callbook CD-ROM 2019

**#0043-S HRO Price \$49.95**

The Radio Amateur Callbook on CD-ROM contains the callsign and address information of the Amateurs Radio stations all over the world. With more than 1,600,000 licensed radio amateurs, it lets you find the data you are looking for in a fast and easy manner. The Callbook is divided in two databases: The U.S. and the international database. In the U.S. database, you can search by different fields (call, name, city, ZIP or county). In addition, there is a text search facility. Use the Search menu to start the search. In the international database, you can search by call sign or by text string.

**BONUS USB drive version!** The widely popular Radio Amateur Callbook is now available on a 1 GB flash drive. This bamboo, eco-friendly flash drive features a magnetic cap. Perfect for Amateur Radio operators who use net books or other portable devices which don't have a CD-ROM drive. Free with CD-ROM purchase. System Requirements: Windows XP, Vista, 7 or 8.

## HRO Extended Warranty Program

HRO's Optional Extended Warranty Program extends the original manufacturer's limited warranty on most Amateur Radios, but not for attendant accessories (like batteries, microphones, speakers, etc.) A period of one (1) or two (2) additional years can be selected, and all limitations, exceptions, and exclusions of the original manufacturer's warranty apply during this extended period.

The HRO Extended Warranty Program must be purchased within 30 days of the date the original product(s) was purchased, and is only available to the original

purchaser of the relevant product(s). Neither the benefits nor coverage of this program are assignable or transferable, and verification that the Extended Warranty Program was purchased, product purchase date and serial numbers may be required of the buyer.

The HRO Extended Warranty Program starts at the conclusion of the new product original warranty period, and all Extended Warranty claims must be processed by HRO directly via any one of our store locations.

Further details are available online at [www.hamradio.com](http://www.hamradio.com).




# Easily Program all the Features of Your Radio...

with the RT Systems Programmer\* designed specifically for it.

Your radio does more than just memories. So does this software.

- Options you struggle to set from the face of the radio can be set up and saved in the Programmer.
- Explore all your radio can do by seeing the features on the computer screen.
- So much more than just Memory Management.
- Links to repeater data built-in.

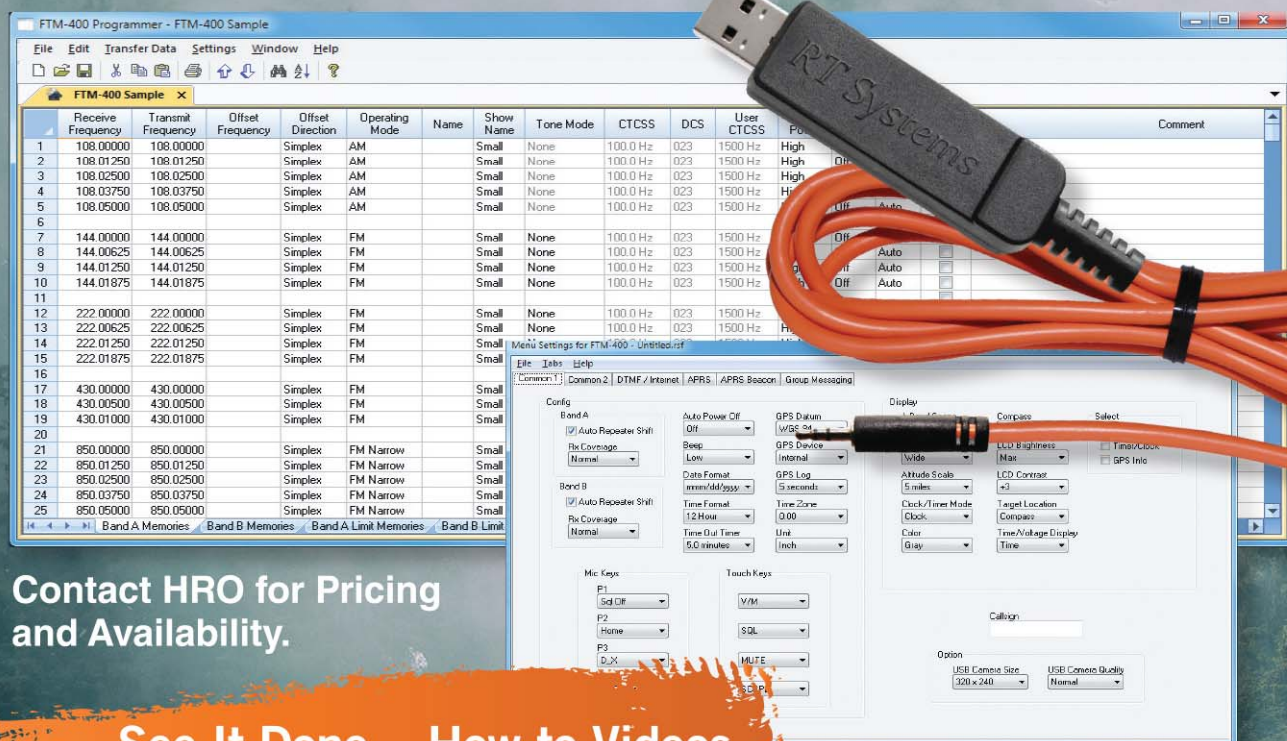

Contact HRO for Pricing  
and Availability.

See It Done... How-to Videos  
at [www.rtsystems.com](http://www.rtsystems.com)

378 unique radio Programmers... and growing. Check for your radio model at: [www.rtsystems.com](http://www.rtsystems.com)

## Available for Radios From A to Z

Alinco ■ Anysecu ■ AnyTone ■ B-Tech ■ Baofeng ■ Baojie ■ HYS ■ Icom  
Hesenate ■ HYS ■ JetStream ■ Jintom ■ Juentai ■ Kenwood ■ Leixen  
Luiton ■ PofungPuxing ■ Quansheng ■ QYT ■ Radioddity ■ Retevis  
Rugged Radios ■ SainSonic ■ TDXOne ■ TokmateTonfa ■ TYT ■ VGC  
WLN ■ Wouxun ■ Yaesu ■ Zastone

For More Information Before You Buy: [www.rtsystems.com](http://www.rtsystems.com) | [websales@rtsystemsinc.com](mailto:websales@rtsystemsinc.com) | 800-921-4834



**Study with the best!**  
**License Study Materials by**

# Gordon West, WB6NOA & the W5YI Group



## NEW! TECHNICIAN CLASS



**Technician Class book for the 2018-2022 entry level exam!** Gordo reorganizes the Q&A into logical topic groups for easy learning! Key words are highlighted in his explanations to help you understand the material for test success. Web addresses for more than 125 helpful, educational sites.

Includes **On The Air CD**  
demonstrating Tech privileges. W5Y GWTM-18 \$24.95

### Tech Book & Software Package

Gordo's book with W5YI software allows you to study at your computer and take practice exams. Explanations from Gordo's book are on the software – answer a question wrong and his explanation appears to reinforce your learning. Includes free Part 97 Rule Book. W5Y NCS-18 \$34.95

### Tech Audio Course on CD

**Welcome to Gordo's classroom!** Technician audio theory course recorded by Gordo talks you through the Element 2 question pool. Follows the order of his *Technician Class* book, and is full of the sounds of ham radio operating excitement! An excellent study aid if you spend a lot of time in your car or pick-up! On 4 audio CDs. W5Y GWTW-18 \$29.95

## GROL + RADAR



**Get your FCC commercial radio licenses and add valuable credentials to your resume!**

**GROL+RADAR** includes the new FCC Element 1 question pool for the Marine Radio Operator Permit (MROP), the Element 3 pool for the General Radiotelephone Operator License (GROL), and the Element

8 pool for the RADAR Endorsement. Many employers require these licenses for jobs in marine, aero, safety, and municipal positions. Gordo and his team have written clear explanations for all the Q&A to make studying for these exams educational and fun. If you're an Extra Class ham, many of the technical/math questions will look familiar to you. Fully-illustrated to aid your learning. Book includes a searchable CD-ROM with all FCC Rules for Parts 2, 13, 23, 73, 80 and 87. W5Y GROL-09 \$49.95

### GROL+RADAR book & software package

Enhance your learning experience using our practice exam software along with the **GROL+RADAR** book. Software includes answer explanations from the book – when you select a wrong answer, the explanation from the book appears to reinforce your learning. W5Y GRSP-09 \$79.95

## GENERAL CLASS



**General Class book Upgrade to the HF bands with Gordo & W5YI!** Gordo's manual for 2015-2019 reorganizes all the questions into logical topic groups for easier learning. His explanations include highlighted key words to help you remember the material for test success. Companion CD is full of great operating tips!

W5Y GWGM-15 \$24.95


### General Book & Software Package

Study at your computer and take practice exams. Software includes explanations from Gordo's book, scores your results and highlights areas that need further study. Includes free Part 97 Rule Book. W5Y GUS-15 \$34.95

### General Audio Course on CD

General Theory Course recorded by Gordo is full of the sounds that bring ham radio to life! He talks you through the Element 3 theory to help you understand the material and get you ready for your upcoming exam. On 4 audio CDs. W5Y GWGW-15 \$29.95

### Ham Operator Software has All Exams



**Want to study at your computer without tying up your internet connection?** This value pack includes the Tech, General and Extra class exams (Elements 2, 3, and 4) along with a free Part 97 Rule Book. Software includes Gordo's answer explanations from his books! Everything you need to go all the way to the top!

Software only W5Y HOS-18 \$29.95  
Software with all 3 West Books W5Y HOSB-18 \$94.95

### Learn Morse Code for HF Fun!

**In-depth CD audio courses recorded by Gordo:**

0-5 wpm on 8 audio CDs W5Y GW05 \$39.95  
0-5 wpm CW refresher course on 2 audio CDs W5Y GWCT \$14.95  
5-13 wpm on 8 audio CDs W5Y GW13 \$39.95  
10-28 wpm on 8 audio CDs W5Y GW20 \$39.95  
**GW13 & 20 Special Order Only!**

### Learn all about electronics with our Basic books

**Basic Electronics** W5Y BELC \$19.95  
**Basic Digital Electronics** W5Y BDIG \$19.95  
**Basic Communications Electronics** W5Y BCOM \$19.95

## EXTRA CLASS



**Extra Class book Go to the top with Gordo!** 2016-2020 book includes all Element 4 Q&A reorganized into logical topic groups. Gordo's fun, educational explanations with highlighted keywords, and great memory tricks for those tough theory questions! Wait 'til you meet "Eli the Ice Man!"

W5Y GWEM-16 \$29.95


### Extra Book & Software Package

Study at your computer and take practice exams as the W5YI software scores your results and highlights areas that need further study. Includes explanations from Gordo's book. Free Part 97 Rule Book. W5Y ECS-16 \$44.95

### Extra Audio Course on CD

Extra Class Theory Course recorded by Gordo talks you through the difficult Element 4 theory to help you understand the material and get you ready for your upgrade to the top. On 6 audio CDs. W5Y GWEW-16 \$44.95

### Getting Started in Electronics



**by Forrest M. Mims**  
This is a complete electronics course in 128 pages! This famous electronics inventor teaches you the basics, takes you on a tour of analog and digital components, explains how they work, and shows how they are combined for various applications. Includes circuit assembly tips and 100 electronic circuits you can build and test. Forrest has written dozens of books, hundreds of articles, invented scientific devices and travelled to the Amazon for NASA, and loves to share his knowledge with eager students!

W5Y GSTD \$19.95

### Engineer's Mini Notebooks



These Mims classics teach you hands-on electronics! Study and build 100s of practical circuits and fun projects. Each volume contains several of his famous Mini Notebooks. Terrific ideas for science fair projects and a great way to learn about electronics!

Useful reference guides for your workbench!

**Vol. 1: Timer, Op Amp, & Optoelectronic Circuits & Projects** W5Y MINI-1 \$12.95  
**Vol. 2: Science & Communications Circuits & Projects** W5Y MINI-2 \$12.95  
**Vol. 3: Electronic Sensor Circuits & Projects** W5Y MINI-3 \$12.95  
**Vol. 4: Electronic Formulas, Symbols & Circuits** W5Y MINI-4 \$12.95

**All W5YI software products are compatible with Windows operating systems.**



# KENWOOD

## Performance Exceeding Expectations.

The most happy and sublime encounters happen in the worst circumstances and under the harshest conditions.

There are enthusiasts who know this all too well because of their love of HF radio.

Results born of certainty and not circumstance. Delivered through impeccable performance. This is our offering to you.



HF/50MHz TRANSCEIVER

# TS-890S

**NEW**

### Top-class receiving performance

3 kinds of dynamic range make for top-class performance.

- ▶ Third order intermodulation Dynamic Range (3rd IMDR) 110dB\*
- ▶ Reciprocal Mixing Dynamic Range (RMDR) 114dB\*
- ▶ Blocking Dynamic Range (BDR) 150dB\*

\*Values are measured examples. (2kHz spacing: 14.1 MHz, CW, BW 500 Hz, Pre Amp OFF)

- ▶ Full Down Conversion RX
- ▶ High Carrier to Noise Ratio 1st LO
- ▶ H-mode mixer

### 4 kinds of built-in roofing filters

500Hz / 2.7kHz / 6kHz / 15kHz (270Hz Option)

### 7 inch Color TFT Display

- ▶ Roofing frequency sampling band scope
- ▶ Band scope auto-scroll mode
- ▶ Multi-information display including filter scope

### Clean and tough 100W output

Built-in high-speed automatic antenna tuner

32-bit floating-point DSP for RX / TX and BandScope

Customer Support: (310) 639-4200



[www.kenwood.com/usa](http://www.kenwood.com/usa)



ADS#30018


# The Most Complete Reference and Guide for Radio Communications...

The 2019 ARRL Handbook advances your pursuit of radio experimentation, discovery, and achievement. Use it to support your ham radio interests from short- and long-wave frequencies through microwaves!

## Key Topics

- Radio electronics theory and principles
- Circuit design and equipment
- Radio signal transmission and propagation
- Digital and analog modulation and protocols
- Antennas and transmission lines
- Construction practices

**Always Updated!** View a list of new projects and content at [www.arrl.org/arrl-handbook-2019](http://www.arrl.org/arrl-handbook-2019)

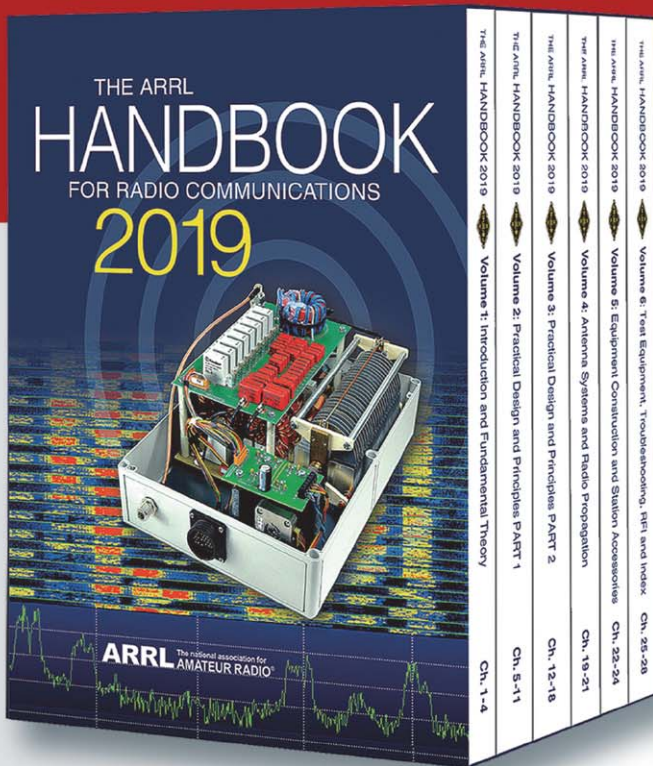

**Plus eBook and Supplemental Download Included!**

## ...in a Convenient Six-Volume Ultimate Boxed Set

The 2019 ARRL Handbook is divided into multiple volumes. All six volumes are included in a handsome, hard slipcase, for easy storage and access. Each volume is more manageable to read and browse.

### Volume 1

**Introduction and Fundamental Theory**  
What is Amateur (Ham) Radio?  
Electrical Fundamentals  
Radio Fundamentals  
Circuits and Components

### Volume 2

**Practical Design and Principles PART 1**  
RF Techniques  
Computer-Aided Circuit Design  
Power Sources  
DSP and SDR Fundamentals  
Oscillators and Synthesizers  
Analog and Digital Filtering  
Modulation

### Volume 3

**Practical Design and Principles PART 2**  
Receiving  
Transmitting  
Transceiver Design Topics  
Digital Protocols and Modes  
Amateur Radio Data Platforms  
RF Power Amplifiers  
Repeaters

### Volume 4

**Antenna Systems and Radio Propagation**  
Propagation of Radio Signals  
Transmission Lines  
Antennas

### Volume 5

**Equipment Construction and Station Accessories**  
Component Data and References  
Construction Techniques  
Assembling a Station

### Volume 6

**Test Equipment, Troubleshooting, RFI, and Index**  
Test Equipment and Measurements  
Troubleshooting and Maintenance  
RF Interference  
Safety

## The ARRL Handbook 2019 Edition

**Six-Volume Boxed Set**  
**Retail \$64.95**

**Softcover**  
**Retail \$49.95**



**ARRL** The national association for AMATEUR RADIO®





**HF**

## IC-7851

The Ultimate HF / 6M Transceiver



## IC-7610

HF / 6M SDR Transceiver



## IC-7300

HF / 6M SDR Transceiver

**RX**

## IC-R8600

10 kHz - 3 GHz Wideband SDR Receiver



### Information & Downloads

[AMATEUR TOOL KIT](#) | [COMIC BOOKS](#) | [VIDEOS](#) | [WWW.ICOMAMERICA.COM](http://WWW.ICOMAMERICA.COM)

Electronic advertisements feature active links.

\*Frequency coverage may vary. Refer to owner's manual for exact specifications.

©2018 Icom America Inc. The Icom logo is a registered trademark of Icom Inc. All other trademarks remain the property of their respective owners. All specifications are subject to change without notice or obligation. 31196

**ICOM®**



# ANALOG



**IC-V80 HD**  
2M Portable



**IC-T70A HD**  
2M / 70CM Portable



**IC-2300H**  
2M Mobile



**IC-2730A**  
2M / 70CM Mobile

## Information & Downloads

[AMATEUR TOOL KIT](#) | [COMIC BOOKS](#) | [VIDEOS](#) | [WWW.ICOMAMERICA.COM](http://WWW.ICOMAMERICA.COM)

Electronic advertisements feature active links.

\*Frequency coverage may vary. Refer to owner's manual for exact specifications.

©2018 Icom America Inc. The Icom logo is a registered trademark of Icom Inc. All other trademarks remain the property of their respective owners. All specifications are subject to change without notice or obligation. 31196

The ICOM logo, featuring a red circle with a white dot inside, followed by the word 'ICOM' in a bold, black, sans-serif font.





# D-STAR



## IC-7100

HF / 6M / 2M / 70CM



## ID-4100A

2M / 70CM Analog/Digital  
Terminal and Access Point Modes



## ID-5100A

2M / 70CM Analog/Digital



## ID-51A PLUS2

2M / 70CM Analog/Digital  
Terminal and Access Point Modes



## ID-31A PLUS

70CM Analog/Digital  
Terminal and Access Point Modes

# *Superior RF Performance*



HF/50 MHz Transceiver

## ***FT DX 5000MP Limited***

200 W / Class-A 75 W

### **Best Performance for the Serious DX'er**

- Narrow IF Down-Conversion Receiver
- Equipped with Extra Sharp Crystal Roofing Filters (300 Hz, 600 Hz and 3 kHz)
- Astounding 112 dB IDR & +40dBm IP3
- Provides ultra-high-Q RF preselection selectivity

HF/50 MHz Transceiver

## ***FT DX 3000D***

100 W

### **Achieving the Highest Ideal of HF Transceivers**

- Narrow IF Down-Conversion Receiver
- Equipped with Extra Sharp Crystal Roofing Filters (600 Hz and 3 kHz)
- Yaesu IF DSP provides powerful and effective QRM rejection
- High dynamic range and IP3 performance



HF/50 MHz Transceiver

## ***FT DX 1200***

100 W

### **Best in Class Performance and Supreme Operability**

- 3 kHz, 6 kHz and 15 kHz Roofing Filters included
- Yaesu IF DSP provides powerful and effective QRM rejection
- 40MHz 1st IF produces excellent shape factor



*The radio... **YAESU***

# *True RF Legend* *True Performance*

## ***FT DX 5000MP Limited***



RF  $\mu$ -Tuning Unit  
(Optional)

- Provides ultra-high-Q RF preselection selectivity

## *Congratulations*



*We congratulate WRTC 2018 Y81N Winning Team from Lithuania*

The winners of the World Radio Team Championship 2018  
Gedas Lucinskas (LY9A) and Mindis Jukna (LY4L)

Rig used: 2 x FTDX5000MP

**YAESU**

**PRIME  
SPONSOR**



**YAESU**  
*The radio*

**YAESU USA**  
6125 Phyllis Drive, Cypress,  
CA 90630 (714) 827-7600

For the latest Yaesu news, visit us on the Internet: <http://www.yaesu.com>

Specifications subject to change without notice. Some accessories and/or options may be standard in certain areas. Frequency coverage may differ in some countries. Check with your local Yaesu Dealer for specific details.

HF/50 MHz 100 W Transceiver

# FTDX3000

New Crystal Roofing Filters provide ultimate weak signal receiver performance in crowded, strong signal environments



## [New Feature] Waterfall Display with High Speed Spectrum Scope

Easily find your way around on today's busy bands with Yaesu's FTD3000D spectrum scope display.

## Amazing Crystal Roofing Filter performance

Down conversion 9 MHz 1st IF frequency construction allows for very tight narrow 300 Hz (option), 600 Hz and 3 kHz bandwidth roofing filters.

## Outstanding receiver performance, the heritage of the FTDX5000!

High dynamic range IP3 performance originally designed for and proven in the FTDX5000.

## IF DSP provides effective and optimized QRM rejection

Outstanding performance during challenging crowded band situations like DXing and Contesting.



## Independent Frequency display

The newly developed LCD has a wider viewing angle and higher contrast.

## 4.3-inch Large and wide color LCD display with high resolution

Easy to read with many functions to chose from.

## AF SCOPE display and RTTY/PSK encoder/decoder

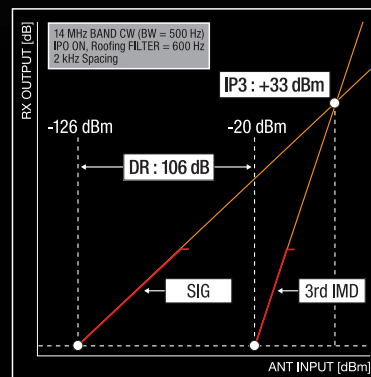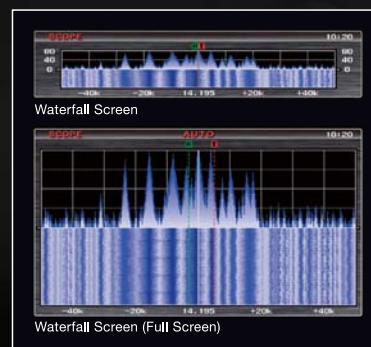

3rd Order Dynamic Range / IP3 (2kHz Spacing)



HF/50MHz 100W Transceiver

# FTDX 1200

This medium-price HF Transceiver Excels on all fronts. The High Frequency Design Technology it has inherited, ensures "Best in Class Performance".  
The Outstanding Operability is Perfect for the DX Scene.



## [New Feature] Waterfall Display with High Speed Spectrum Scope

The Waterfall display shows the flow of signal strength through the use of color shading, enabling easy viewing of weak signals and temporal variation of signals.

## A superior triple conversion method is used with the 1st IF frequency set at 40 MHz

The receiving circuit has inherited the design concept of the FTD series, assuring the best-in-class receiving performance.

## Roofing filters with respective bandwidths of 3 kHz, 6 kHz, and 15 kHz are equipped as standard

Nearby interfering signals can be adequately eliminated by the narrow-band roofing filter.

## YAESU IF DSP provides powerful, versatile, and effective performance


Well-proven QRM rejection features such as WIDTH, SHIFT, CONTOUR, NOTCH, and APF are included.

## An optional built-in FFT-1 supports advanced functionality

Advanced functionality including AF-FFT Scope, RTTY/PSK31 Encode/Decode, CW Decode, and CW Auto Zero-in are supported.



The Full Color 4.3 inch TFT display  
(Optional FFT-1 is required for AF-FFT Scope display.)

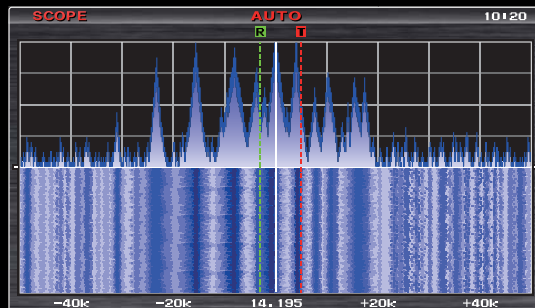

Waterfall display (Full Screen display)

# Exciting New Yaesu Field Gear

HF/50 MHz 100 W All Mode Transceiver

## FT-891



Actual Size

## An Innovative Multi-band, Multi-mode Transceiver within an Ultra Compact Body

- Rugged construction in a Compact Mobile Package (6.1"W x 2.0"H x 8.6"D)
- Stable 100 Watts of RF Power Output with efficient Dual Internal Fans
- Legendary Yaesu Receiver Performance
- Triple conversion receiver with a 1st IF frequency of 69.450 MHz
- 3 kHz Roofing Filter (equipped as standard)
- Detachable Front Panel permits convenient mounting and operation
- Large dot matrix LCD display with Rapid Spectrum Scope
- Enhanced Operating Features:
  - Large diameter Main Tuning Dial (1.6") with Torque adjustment
  - Pop-up Menus for quick and easy operation
  - Large Transmit/Receive indicator
  - Three Programmable Front Panel Function Keys
- Especially designed FC-50 External Antenna Tuner (option)

**YAESU**

*60th Anniversary*

**YAESU USA**

6125 Phyllis Drive, Cypress,  
CA 90630 (714) 827-7600

For the latest Yaesu news, visit us on the Internet: <http://www.yaesu.com>

Specifications subject to change without notice. Some accessories and/or options may be standard in certain areas. Frequency coverage may differ in some countries. Check with your local Yaesu Dealer for specific details.



# FTM-100DR


C4FM/FM 144/430 MHz DUAL BAND DIGITAL TRANSCEIVER



## A Digital Mobile Transceiver for a New Age

Advanced C4FM Technology Makes Possible  
a Wide Variety of Mobile Operations

- Easy-to-read graphical interface for user-friendly operation
- C4FM Digital with FM Friendly AMS
- Bright multi-colored Mode/Status Indicator to visibly and clearly inform the current state of the transceiver
- Powerful 50 Watts RF output for VHF/UHF Amateur bands
- Supports WIRES-X internet linking and worldwide communication system for amateur radio
- Establish an internet WIRES-X node station (Requires optional HRI-200)

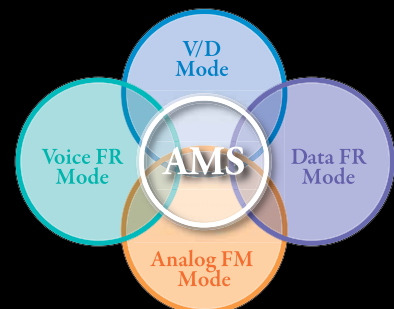

**YAESU**  
The radio

**YAESU USA**  
6125 Phyllis Drive, Cypress,  
CA 90630 (714) 827-7600

For latest Yaesu news, visit us on the Internet: <http://www.yaesu.com>

Specifications subject to change without notice. Some accessories and/or options may be standard in certain areas. Frequency coverage may differ in some countries. Check with your local Yaesu Dealer for specific details.

# High Performance Commercial Grade Specifications

*High Performance with Many Supportive Features  
Packaged in a Compact Body*



《Actual Size》

**VHF 5W Single Band  
FM Handheld Transceiver**

## FT-25R

**VHF / UHF 5W Dual Band  
FM Handheld Transceiver**

## FT-65R

**Commercial Grade Specifications**  
compact, rugged construction  
(IP-54/MIL-STD-810C, D and E)

**Large Front Speaker**  
One Full Watt of Crisp, Clear Audio

**5 Watts of Reliable RF Power,**  
Three Selectable TX Power Settings  
(5 W / 2.5 W / 0.5 W)

**QRK (Quick Recall Key) :**  
Four User Programmable Keys  
provide Quick Access to favorite functions

**Included 1,950mAh Li-ion Battery Pack**  
capable of over 9 hours of operation

**VOX Operation Available**  
with the optional Earpiece Microphone

**Emergency Signaling :**  
Bright white LED Flashlight, Audible Alarm  
and Immediate HOME Channel Access

### Useful Features:

- Versatile scanning capabilities
- WX Channels with "Severe Weather" Alert
- FM Broadcast Receiver
- PC Programming
- Transceiver-to-Transceiver Cloning



**YAESU**  
The radio



《Actual Size》

**C4FM/FM 144/430MHz DUAL BAND  
5W DIGITAL TRANSCEIVER**

**FT-70DR**

**C4FM**  
Digital Communication  
Clear and Crisp Voice Technology

**AMS**  
Automatic Mode Select

## The Perfect Choice Sophisticated Dual Band Digital Transceiver

**Built to Commercial Grade Specifications**

**Advanced C4FM Digital**

**System Fusion Compatible**

**Combines FM and Digital Communications  
with AMS (Automatic Mode Select)**

**Coordinated Group Operation  
with Digital Group ID**

**700 mW of Loud, Clear Voice, Audio Output**

**5 Watts of Reliable RF Power  
from a Compact Handheld Unit**

**Wide Band Receive Coverage 108 - 579.995 MHz**

**Rugged Construction  
Meets IP54 (Dust & Water protection)**

**Large Multi-Color Operating Mode Indicator**

**Huge 1,105 Channel Memory**

**YAESU**  
The radio

**YAESU USA**  
6125 Phyllis Drive, Cypress,  
CA 90630 (714) 827-7600

For the latest Yaesu news, visit us on the Internet: <http://www.yaesu.com>

Specifications subject to change without notice. Some accessories and/or options may be standard in certain areas. Frequency coverage may differ in some countries. Check with your local Yaesu Dealer for specific details.





All products listed are in stock at all Ham Radio Outlet Stores.  
Please visit [www.hamradio.com](http://www.hamradio.com) for pricing and product details.



Scan with your Android™ or Apple® device to download the ABR app

## Buy With Confidence

ABR Industries manufactures all assemblies in our Houston facility, guaranteeing quality control from start to finish. Being a critical component of your system or station, it's important to know where and how your coax cable assemblies are built.

**Not All Cable Assemblies are Created Equal... See the ABR Difference.**



### 2213A RG213/U MIL-SPEC

Non-contaminating Direct-Burial Ultra-Violet Resistant Jacket.  
W/SILVER-TEFLON PL259 & WEATHERPROOF HST each end.

Attenuation per 100ft	Power Rating	Efficiency%
0.6dB @ 10MHz	3.43kW	87%
1.0dB @ 30MHz	1.95kW	79%
1.4dB @ 50MHz	1.5kW	73%
2.4dB @ 150MHz	.83kW	57.1%
4.5dB @ 450MHz	.45kW	35.8%

Part #	Length/Ft
2213A-PL-3	3
2213A-PL-25	25
2213A-PL-50	50
2213A-PL-75	75
2213A-PL-100	100
2213A-PL-150	150



1" Tinned Copper Flat Ground Braid. 7ga 85/Amps  
w/1/4" Stud Ring Terminals. Quick &  
Easy Grounding Terminations.

Part #	Length/Ft
235-5X-20	20
235-5X-10	10
235-5X-5	5
235-5X-3	3



1/2" Tinned Copper Flat Ground Braid. 10ga 53/Amps  
w/#10 Stud Ring Terminals. Quick &  
Easy Grounding Terminations.

Part #	Length/Ft
233/2-G4-12	12
233/2-G4-10	10
233/2-G4-5	5
233/2-G4-3	3
233/2-G4-1	1



233/2-G4-length  
Unique design (Nickel Grommets 4" Spacing) allows  
for easy attachment to a vehicle's body or truck bed  
to create a "ground plane"  
Good option as a buss-bar in the shack  
1/2" wide tinned copper 38x48x8/34 10ga 53 amps

Part#	Length/Ft
233/2-G4-10	10
233/2-G4-5	5
233/2-G4-3	3
233/2-G4-1.5	1.5



### 218XA RG8X (240F) Foil+TC Braid

Non-contaminating Direct-Burial Ultra-Violet Resistant Jacket.  
W/SILVER-TEFLON PL259 & WEATHERPROOF HST each end.

Attenuation per 100ft	Power Rating	Efficiency%
0.9dB @ 10MHz	2.16kW	80%
1.4dB @ 30MHz	1.24kW	69%
2.1dB @ 50MHz	0.96kW	62%
3.6dB @ 150MHz	1.55kW	43.5%
6.3dB @ 450MHz	1.31kW	23.2%

Part #	Length/Ft
218XA-PL-1.5	1.5
218XA-PL-3	3
218XA-PL-6	6
218XA-PL-9	9
218XA-PL-12	12
218XA-PL-18	18
218XA-PL-30	30
218XA-PL-40	40
218XA-PL-50	50
218XA-PL-75	75
218XA-PL-100	100
218XA-PL-125	125
218XA-PL-150	150
218XA-PL-200	200



### RG316/U Teflon® .100" OD

HT jumpers "antenna attachment for better coverage"

Part#	Description	Length/Ft
23316-NM-3	N Male Both ends	3
23316-NM-6	N Male Both Ends	6
23316-SM-SF-3	SMA Male-SMA Female	3
23316-SM-SF-6	SMA Male-SMA Female	6
23316-SM-SF-9	SMA Male-SMA Female	9
23316-SM-SF-12	SMA Male-SMA Female	12
23316-SM-SF-15	SMA Male-SMA Female	15
23316-SM-3	SMA Male Both Ends	3
23316-SM-6	SMA Male Both Ends	6
23316-SM-PL-3	SMA Male-PL259	3
23316-SM-PL-6	SMA Male-PL259	6
23316-SM-SO-3	SMA Male-SO239	3
23316-SM-SO-6	SMA Male-SO239	6



### 25400F 400-FLEX (RG8/U TYPE) FLEXIBLE LOW LOSS

Non-contaminating Direct-Burial Ultra-Violet Resistant Jacket.  
W/SILVER-TEFLON PL259 & WEATHERPROOF HST each end.

Attenuation per 100ft	Power Rating	Efficiency%
0.8dB @ 30MHz	2.77kW	83.0%
1.1dB @ 50MHz	2.14kW	78.5%
1.8dB @ 150MHz	1.22kW	65.4%
3.3dB @ 450MHz	0.69kW	47.3%

Part #	Length/Ft
25400F-PL-1.5	1.5
25400F-PL-3	3
25400F-PL-6	6
25400F-PL-12	12
25400F-PL-18	18
25400F-PL-35	35
25400F-PL-50	50
25400F-PL-75	75
25400F-PL-100	100
25400F-PL-150	150



### 25400F 400-FLEX (RG8/U TYPE) FLEXIBLE LOW LOSS

w/N Male plugs each end. Complete

w/Weatherproof Heat Shrink Tubing (WP-HST)

Attenuation per 100ft	Power Rating	Efficiency%
0.8dB @ 30MHz	2.77kW	83.0%
1.1dB @ 50MHz	2.14kW	78.5%
1.8dB @ 150MHz	1.22kW	65.4%
3.3dB @ 450MHz	0.69kW	47.3%

Part #	Length/Ft
25400F-NM-3	3
25400F-NM-6	6
25400F-NM-12	12
25400F-NM-18	18
25400F-NM-25	25
25400F-NM-35	35
25400F-NM-50	50
25400F-NM-75	75
25400F-NM-100	100
25400F-NM-150	150

## Suggested Applications

**218XATC Series:** Lightweight mobile, Dipole Antennas, as jumpers between equipment in tight places. Very Flexible.

**2213A Series:** Bands below 30MHz w/linear amplifiers. Solid Polyethylene Dielectric is robust and will stand up to HF high power over a long period of time (i.e. corona effect).

**25400F Series:** Great for frequencies 144MHz and higher. Double Shield=Shielding Effectiveness<90dB.

This is a guide only. Exceptions may apply.





**ICOM**



## IC-PW1 w/ Solid State Remote Control Head

**Palstar**



## NEW! LA-1K 1000W HF Solid State Amplifier

We are pleased to announce that the LA-1K far exceeds all standards in FCC testing at a FCC-certified laboratory and received certification for equipment authorization. The LA-1K is now available for purchase.

- Cooling: variable speed fans (3 speed).
- Chassis: .090 gauge aluminium.
- Top cover: .090 gauge aluminium powder coated.
- Dimensions: 12.75" wide x 6.25" high x 16.5" deep.
- Shipping weight: 27 lbs, 12.25 Kg.
- Design concept: full compatibility with the Palstar HF-AUTO autotuner.
- Warranty: Two Years.

### Specifications

- SSB Power: 1000 Watts PEP CW ICAS.
- CW Mode: power levels up to 850 W.
- FM / RTTY: 500 Watts.
- AM: 275 Watts.
- Frequency range: 1.8 to 54 MHz.
- Display: Color TFT touch screen.
- Output: 3 x RF SO-239 or type N.
- ALC: Exciter power control.
- Drive Required: 40-55W (all bands).
- Gain: 13+/-1dB (nominal.)
- RF sensing: auto band switching.
- RF Output: vacuum relay T/R switching.
- Power supply: internal medical grade.
- DC supply: 100 VAC - 260 VAC 50 V @ 42 A.
- Power devices: 2 x 5600 H 600 W LD-MOS.
- Auto-Protect: SWR / short circuit.
- Intermod: low IMD distortion >-35dB.
- Pure signal: sample@+10 dBm (rear panel@1 kW output).

Icom's linear amp provides wide frequency coverage with up to 1kW output requiring only a 100-Watt maximum input. The duty cycle is 100 percent with full break-in operation. It covers amateur bands 160 to 15 meters plus 6 meters. Includes an automatic antenna tuner for all bands. Internal circuitry allows the ALC to be adjusted over a wide range so the PW1 can be used with almost any rig, not just Icom. Operates on 110 or 220 VAC 50 or 60 cycle.

**YAESU**  
The radio

**Quadra System**

Use this linear amp to operate on HF (160-15 meters) and 6 meters. It has automatic band switching with the FT-1000D, FT-1000MP, FT-920, FT-990, FT-991, FTdx1200, FTdx3000, and the FTdx-5000 HF radios. The amp has 8 MRF150 power MOSFet transistors designed into 4 units of 2 transistors in a push-pull circuit at 48 VDC. The separate power supply, the VP-1000, allows easy installation. There are two input voltages, 117 VAC



or 220 VAC. Output power is a function of the power supply voltages. At 220 VAC there is 1000 Watts out on HF and 500 Watts on 6 meters. At 117 VAC the output is reduced to 500 Watts on HF.

The Quadra has a built-in high speed tuner to match the amp to your antennas. It has four antenna outputs and two inputs. The multifunction omni-glow LCD display shows the status of the amplifier. There is automatic system monitoring with VSWR protection.

## Amplifier Specifications

**SCALL for HRO Discount Prices**

	Model	Frequency Range	Modes	Power In	Power Out	Voltage	Current	Pre-amp	Connector	Wgt
Ameritron	AL-1500	160-15 M*	SSB, CW	65 W	1500+ W	220 VAC	15 A	–	SO-239	50 lbs#
	AL-1200	160-15 M*	SSB, CW	100 W	1500 W	220 VAC		–	SO-239	50 lbs#
	ALS-1300	160-15 M*	SSB, CW	90 W	1200 W	220 VAC	15 A	–	SO-239	22 lbs#
	ALS-1306	160-15 M*	SSB, CW	100 W	1200 W	110/220 VAC	25/12 A	–	SO-239	22 lbs \$
	ALS-500M	160-15 M*	SSB, CW	100 W	500 W	13.8 VDC	80 A	–	SO-239	7 lbs
	ALS-600	160-15 M*	SSB, CW	100 W	600 W	110/220 VAC	16 A 110V	–	SO-239	13 lbs#
	ALS-606	160-6 M	All	75 W	600 W	120/220 VAC	12/6 A	–	SO-239	15 lbs
	AL-80B	160-15 M*	SSB, CW	100 W	1000 W	110/220 VAC	15/10 A	–	SO-239	54 lbs
	AL-800	160-15 M*	SSB, CW	100 W	750 W	110 VAC	12 A	–	SO-239	67 lbs
	AL-800H	160-15 M*	SSB, CW	55 W	1500 W	240 VAC	9 A	–	SO-239	69 lbs
	AL-811	160-15 M*	SSB, CW	75 W	600 W	110/220 VAC	8/4 A	–	SO-239	40 lbs
	AL-811H	160-15 M*	SSB, CW	75 W	800W	110/220 VAC	8/4 A	–	SO-239	41 lbs
AL-82	160-15 M*	SSB, CW	100 W	1500 W	220 VAC	15 A	–	SO-239	52 lbs#	
Icom	IC-PW1	160-15 M*	SSB, CW	100 W	1000 W	110/220 VAC	20/15 A	–	SO-240	55 lbs
Mirage	A-1015G	50-54 MHz	All	10 W	150 W	13.8 VDC	23 A	yes	SO-239	5 lbs
	B-34	144-148 MHz	All	2 W	35 W	12-15 VDC	4 A		SO-239	2 lbs
	B-34G	144-148 MHz	All	2W	35 W	12-15 VDC	4 A	yes	SO-239	2 lbs
	BD-35	143-149/430-450	FM	7 W	45 W	12-15 VDC	7 A		SO-239	3 lbs
	B-310G	144-148 MHz	All	4 W	100 W	13.8 VDC	15 A	yes	SO-239	3 lbs
	B-1018G	144-148 MHz	All	10 W	160 W	13.8 VDC	25 A	10 dB	SO-239	5 lbs
	B-2518G	144-148 MHz	All	25 W	160 W	13.8 VDC	25 A	10 dB	SO-239	5 lbs
	B-5018G	144-148 MHz	All	50 W	160 W	13.8 VDC	24 A	yes	SO-239	5 lbs
	D-1010N	430-450 MHz	All	10 W	100 W	13.8 VDC	20 A	–	N type	5 lbs
	D-3010N	430-450 MHz	All	30 W	100 W	13.8 VDC	20 A	–	N type	5 lbs
ACOM	A600S	160-6 M	All	25 W	600 W	110/220 VAC	10 A/6.3 A	–	SO-239	26.5 lbs
	A1000	160-10 M + 6M	SSB, CW	60 W	1000 W	200-240 VAC	2000VA	–	SO-239	48.5 lbs
	A1010	160-10 M	SSB, CW	50 W	500 W	100/240 VAC	1200VA	–	SO-239	39.7 lbs
	A1500	160-10 M + 6M	SSB, CW	60	1200 W	100/240 VAC	3500VA	–	SO-239	65 lbs
	A2000	160-10 M	SSB, CW	50	1500 W	100/240 VAC	3500VA	–	SO-239	96 lbs
Palstar	LA-1K	1.8-54 MHz	All	40-55mW	1000 W SSB	110/260 VAC		–	SO-239	27 lbs
Yaesu	Quadra	160- 15 M* + 6 M	SSB, CW	100 W	1000 W	110/220 VAC	†	–	SO-239	21 lbs

\*Owner modifiable for 10 m #Add 35 pounds. Transformer shipped separately. †VP-1000 power supply inc.  
## Expect long production delays \$ Add 12 pounds. Transformer shipped in separate package.



## Mobile Amp ALS-500M

500 W PEP / 400 W CW mobile amplifier with instant band switching, no tuning, no warm up. SWR / load fault / thermal overload protected. On / Off / Bypass switch. Remote on / off control capable. DC current meter with very quiet fan. 1.5-22 MHz (10 / 12 Meters with Mod-10 M option). Options include ALS-500RC remote head and SPS-75MV 110VAC 75A @ 13.8VDC output power supply for using ALS-500M at home.



## Low-Cost Desktop Amp AL-811H

800 Watt PEP output. This low-cost desktop linear HF amplifier gives plenty of power to burst through QRM. It will plug right into a 120 VAC outlet. Four tough 811A transmitting tubes, heavy-duty power supply, all HF band coverage, operate / stand-by switch, transmit LED, plus more! UPS shippable. The **AL-811** is similar but has three 811A tubes, 600 Watts PEP output.

## Accessories



### ARB-704

**Amp to Rig Interface**  
Protects rig from damage by keying line transients and makes hooking up to your rig easy.



## Stop Voltage Spikes ICP-120

Stops damaging in-rush current by absorbing high-voltage spikes. Works with nearly all linear amps.

## No-Tune Amps



### ALS-1306

## HF+ 6, 1200 W Solid State Amplifier

Covers 1.5-54 MHz with 1200 Watts PEP Output. Features instant automatic band-switching, no tuning and no warm-up. It is SWR protected with quiet variable-speed cooling. Metering includes PEP FWD / REF, PA balance and ALC with a LED Indicator. There are front-panel band / error LEDs. Front-panel ALC control. The ALS-1306 has modular construction for easy servicing, and is powered by a 50 VDC switching power supply. This compact, operator-friendly and attractive desk-top amplifier fits neatly into any station. Just 10 W x 6.5 H x 18.5 D inches and weighs only 22 lbs.



### ALS-1300

1200W solid state FET no-tune amplifier includes most of the features of the ALS-1306 but no auto band switching and no 6 Meters.



### ALS-600

No tuning, no fuss, no worries – just turn on and operate. 600 Watts PEP / 500 W CW, 1.5-22 MHz, instant bandswitching, SWR protected. 120 / 220 VAC. 9-1/2 W x 6 H x 12 D inches. Includes matching transformer power supply.

**ALS-600S** ALS-600 with 10 pound switching power supply.

## Legal Limit Amps



### AL-80B

1 kW PEP output from a compact, desktop linear that plugs into 120 VAC outlet. Classic 3-500G tube, inrush current protection, two year limited warranty.



### AL-82

Full legal limit amplifier using a pair of 3-500G tubes. Super heavy duty Hyper-sil® power transformer allows the tubes to be used to their full potential. Two illuminated meters, including one specifically for monitoring grid current. 220VAC. Ships in 3 boxes.



### AL-1200

Full legal limit amplifier using ham radio's toughest tube, the 3CX1300/Z7. The super heavy duty power supply loads at full legal power.



### AL-1500

Ameritron's most powerful amplifier uses a 3C X 1500 / 8877 ceramic tube. 65 W drive gives full legal output.

**For more Ameritron Amps,  
visit [hamradio.com](http://hamradio.com)**



## ACOM Amplifiers Shown Require No Antenna Tuner for VSWR of 3:1 or Less



### ACOM 1000

The ACOM 1000 HF Linear is the world's best value in an amateur HF amplifier. It gives you a comfortable 1000 Watts output on all amateur bands from 160 through 6 meters.

- Frequency coverage: All amateur bands 1.8-54 MHz. MARS / CAP ready model.
- Power output: 1000W PEP or continuous-carrier, no mode limit.
- Intermodulation distortion: better than 35 dB below rated output.
- Hum and noise: Better than 40 dB below rated output.
- Harmonic output suppression: 1.8-29.7 MHz – better than 50 dB below rated output; 50-54 MHz – better than 66 dB below rated output.
- Input and output impedances:
  - nominal value: 50 Ohm unbalanced, UHF (SO239) type connectors;
  - input circuit: broadband, VSWR less than 1.3:1, 1.8-54 MHz continuously (no tunings, no switching);
  - bypass path VSWR less than 1.1:1, 1.8-54 MHz continuously;
  - output matching capability: better than VSWR 3:1 or greater at reduced output levels.
- RF gain: 12.5 dB typically, frequency response less than 1 dB (50 to 60 W drive power for rated output).
- Primary power: 170-264 V (200, 210, 220, 230 and 240 V nominal taps, 100, 110 & 120 V taps on request, +10%-15% tolerance), 50-60 Hz, single phase, 2000 VA consumption at rated output.
- Complies with CE safety and EMC requirements as well as FCC regulations (6,10 and 12 m bands lock provided).
- Size & weight (operating):
  - WxDxH: 422 x 355 x 182 mm, 22 kg.
  - (16.6 x 14 x 7.2 inches, 48.5 lbs.)
- Operating environments:
  - temperature range: 0...+50 degs. Celsius;
  - humidity: up to 75% @ +35 degs. Celsius.
  - height: up to 3000 m above sea level without output deterioration. **HRO Price \$CALL**



### ACOM 1010

- Frequency coverage: all amateur bands in the 1.8-29.7 MHz frequency range; extensions and / or changes on request.
- Power output: 700 W PEP or 500 W continuous carrier.
- Intermodulation distortion: better than 35 dB below rated output.
- Hum and noise: better than 40 dB below rated output.
- Harmonic output suppression: better than 50 dB below rated output.
- Input and output impedances:
  - nominal value: 50 Ohm unbalanced, UHF (SO239) type connectors;
  - input circuit: broadband, VSWR less than 1.3:1, 1.8-30 MHz continuously (no tunings, no switching);
  - bypass path VSWR less than 1.1:1, 1.8-30 MHz continuously, 200 W maximum;
  - output (antenna) impedance matching capability: VSWR up to 3:1 or higher.
- 50 to 70 W drive power for rated output.
- Primary power: 85-132 V / 170-264 VAC (100, 110, 120, 200, 210, 220, 230 and 240 V nominal taps), +10% -15% tolerance), 50-60 Hz, single phase, 1200 VA.
- Size and weight (operating): W x D x H: 406 x 315 x 150 mm, 18 kg. (16 x 12.4 x 5.9 inches, 39.7 lbs.)
- Antenna matching can be achieved in less than 10 seconds and at a quarter of nominal output power, which produces lower risk of interference to other stations and greater safety to the amplifier components. **HRO Price \$CALL**



### ACOM A600S HF / 6 Meter

- Rated output power: 600 W +/-0.5 dB, PEP or continuous carrier, without mode limitation.
- The final stage uses field effect (MOS-FET) transistors type MRFE6VP6300H.
- Compatible with all transceiver models available on the market – does not need any special signals: “ground on transmit” (PTT) and 30 W of RF drive power.
- Remotely controlled by RS232 interface.
- Broadband input circuit providing a perfect transceiver load with SWR below 1.2:1 without retuning from 1.8 to 54MHz.
- Possibility of automatic control – when connected to a transceiver with a CAT interface. **HRO Price \$CALL**



### ACOM 1500

- Frequency coverage: all amateur bands 1.8-54 MHz; extensions and / or changes on request.
- Power output: 1500 W PEP or 1200 W continuous carrier, no mode limit.
- Intermodulation distortion: better than 35 dB below rated output.
- Input and output impedances:
  - nominal value: 50 Ohm unbalanced, UHF (SO239) type connectors;
  - bypass path VSWR less than 1.1:1, 1.8-54 MHz continuously;
  - output matching capability: better than VSWR 3:1 or greater at reduced output levels.
- 60-85 W drive power for rated output.
- Primary power: 85-132 V and 170-264 V (100, 110, 120, 200, 210, 220, 230 & 240 V nominal taps, +10%-15% tolerance), 50-60 Hz, single phase, 3500 VA consumption at rated output. **HRO Price \$CALL**



### ACOM 2000



- RF output: 1500-2000 W keyed carrier or SSB – no time limit. Constant carrier modes 1500 W RF output – no time limit with auxiliary cooling fan.
- Frequency coverage: All amateur bands 1.8-24.5 MHz. 28 Mhz only with modification.
- Band change / tune up: initial output matching process in less than 3 seconds.
- Tuning memories: Non-volatile for up to 10 antennas per frequency segment.
- Drive power: typically 50 W for 1500 W out.
- Input impedance: 50 ohms nominal. VSWR <1.5:1.
- Output tolerance: up to 3:1 VSWR (2:1 on 160 m) at full rated output.
- T / R and keying: vacuum relay: QSK capable.
- Tubes and circuit: 4CX800A/GU74b tetrodes (2); resistive grid, PI-L output with RF negative feedback.
- ALC: negative going, grid derived, -11 v maximum.
- Metering: comprehensive. Remote control unit provides flexible monitoring of all amplifier parameters. PC interface (RS-232) plus remote phone line interrogation feature.
- No controls on RF unit except ON / OFF. RF unit may be located up to 3 meters (20 m with optional cable) from RCU.

**HRO Price \$CALL**



## Epic PWRgate

**NEW!**

Epic PWRgate is a 12 V uninterruptible power system that can supply up to 40A continuously from either a power supply or a Lead Acid or Lithium battery with almost no voltage loss. It also charges the battery with its high performance charger. A separate solar panel input can be used to charge the battery directly from a solar panel with output less than 30 V. **HRO Price Call**

## Super PWRgate PG40s



12 volt uninterruptible power switch that can supply up to 40 amperes continuously from either a power supply or a battery, and can also charge the battery with its high performance charger. Connected equipment will instantly switch to battery during a power blackout or power supply failure. #58403-1046 **HRO Price \$139.95**



**NEW!**

## ISOprw Plus

ISOprwPlus is a solid-state switch using a high powered FET. It turns on when the car's alternator is running and turns off when it is not. The switching point is 13.5 volts. PWRguard output shut-off when voltage is out of range. Safely handles 40 amperes and is protected with a 40 ampere ATC blade fuse. Includes three sets of Powerpole® connectors. USB port for setting operating thresholds and for monitoring. #58401-1044 **HRO Price \$119.95**

## DC-to-GO with 4007U & Super PWRgate PG40S



Super PWRgate provides easy-to-use portable DC Power. Takes Group 24 Size Battery (sold separately). It includes a RIGrunner 4007U (conveniently mounted to battery box) and Super PWRgate PG40S (conveniently mounted to battery box). Optimized for use with gelled & AGM type batteries, but will keep flooded lead acid and marine type batteries near full charge as well. Solid, durable aluminum construction includes mounting holes for convenient, secure use in mobile units. Uses Anderson Powerpole® connectors. #58513-1577 **HRO Price \$259.95**

## PWRcheck



Provides display of voltage, current flow in either direction, wattage and amp-hours. Measures 0 V to 60 V (less than 8 V requires USB power to PWRcheck), 40 A continuous load. Accurate to within +/- 10 mV, +/- 10 mA. Resolution: 10 mV, 10 mA. Backlit graphics LCD displays data in digital, analog and bar graph formats. USB computer interface for configuration and log data download. Programmable alarm conditions for over-current, over / under voltage, amp hours. Uses Powerpole® connectors. #58430-1286 **HRO Price \$179.95**

## PWRguard Plus



Automatic safety switch turns off if voltage exceeds 15 volts or drops below 11.0 volts. Turns back on when voltage is in safe operating range. Momentary voltage dips below 11.0 volts are ignored to prevent false tripping while transmitting. Rated for 40 A maximum while transmitting, 30 A continuous duty. Soft turn-on / turn-off solid state switch protects radio and reduces inrush current – no relay contact bounce! Remote on / off capability. Indicator LEDs and audible alarm notify user when safety switch turns power off. User may disable buzzer. Uses Anderson Powerpole® connectors #58402-1045 **HRO Price \$114.95**

## RIGrunner Power Distribution Panels

RIGRunners are the most convenient and safest way to connect all your 12 volt equipment. Uses Anderson Powerpole® – ARES, RACES, RSGB standard. Polarized and color keyed. 40 Amps total (8012 is 80 Amps total). Outlets fused with assorted ATC / ATO automotive fuses. Blown fuse LED indicators. For home and mobile installations. 6-foot input cable, #10 AWG with 1/4-inch terminals. (#8 AWG for 8012). "Complete" versions include Powerpole® packs.

**Alternate voltage versions of RIGrunners (24-48 VDC) are available! HRO Price \$CALL**



### RIGrunner 4004U

40 amp, 4 outlets. 2 USB ports with 4 A charge. 6 pairs of 30 A Powerpole® sets. #58315-1043 **HRO Price \$79.95**



### RIGrunner 4005

40 amp, 5 outlets. 6 pairs of 30 A Powerpole® sets. #58312-1039 **HRO Price \$64.95**



### RIGrunner 4005H

40 amp, 5 outlets horizontal. 6 pairs of 30 A Powerpole® sets. #58312-1041 **HRO Price \$69.95**



**RIGrunner 4007U** 40 amp continuous duty. 7 fused outlets. Automatic supply voltage and load current measurement shown on a 3 x 7 segment display. Automatic shut off on high (HVD) or low voltage condition (LVD). Intelligent USB port for charging iPhone, Android and other USB devices. #58313-1561 **HRO Price \$169.95**



**RIGrunner 4008** 40 amp, 8 outlets. LED and audible alarms. 6 pairs of 30 A Powerpole® sets. #58307-1035 **HRO Price \$84.95**



**RIGrunner 4008H** 40 amp, 8 outlets horizontal. 12 pairs of 30 A Powerpole® sets. #58307-1037 **HRO Price \$89.95**



**RIGrunner 4010S+** 40 amp, 10 outlets. One master outlet and nine switched with LED and audible alarms. PWRguard shut off, internal USB port, remote access via USB port to turn on/off. Jumper for power saving mode. 12 pairs of 30 A Powerpole® sets. #58303-1601 **HRO Price \$169.95**



**RIGrunner 8012C** 80 amp, 12 outlets with LED & audible alarms. 12 pairs of 30 A Powerpole® sets. #58301-1028 **HRO Price \$159.95**



### RIGrunner 4005i Remote Control

Remotely monitor and control your DC powered systems from any Internet-ready mobile device or PC. 12 VDC power distribution delivers up to 40 amps total through 5 outlets while transmitting. Each outlet features independent on / off control and user configured current trip point, 1 A to 40 A. RJ45 ethernet port standard. WiFi option available. #58312-1353 **HRO Price \$259.95**



All of Astron's solid-state electronically regulated Power Supplies have fold-back current limiting to protect from excessive current, and a heavy duty heat sink. Output voltage: 13.8 VDC  $\pm$  0.05 volts. 220 V supplies available on special order at slightly higher price.

**RS-A Series** Standard power supply with on / off switch. Adjust voltage internally.

**SL Series** Slim Line design for low-profile looks.

## MODEL RS-35M



**RS-M Series** Power supplies with front meters. One is for voltage and the other current.

**SS Series** High efficiency switching supplies specially filtered for use with communications equipment for all frequencies including HF. Heavy duty design, low profile, light weight and EMI filter.

**VS-M Series** Variable power supplies with separate volt and amp meters. Adjustable output: 2-15 volts.

**RM Series** 19" x 5 1/4" rack-mount power supplies available with or without meters and may be variable. The RM-60 comes with or without meters.

## Power Supplies

Brand	Model	Cont.Duty 13.8 VDC	Intermit Duty	Height in	Width in	Depth in	Weight lbs	HRO Price
Alinco	DM-330MVT	30 A	32 A	2.8	6.1	8.07	3.5	CALL
	DM-430T	20 A	30 A	2.5	5	6.1	3	CALL
Astron	RS-4A	3 A	4 A	3.75	6.5	9	5	CALL
	RS-7A	5 A	7 A	3.75	6.5	9	9	CALL
	RS-10A	7.5 A	10 A	4	7.5	10.75	11	CALL
	RS-12A	9 A	12 A	4.5	8	9	13	CALL
	RS-20A	16 A	20 A	5	9	10.5	18	CALL
	RS-35A	25 A	35 A	5	11	11	27	CALL
	RS-50A	37 A	50 A	6	13.75	11	46	CALL
	RS-70A	57 A	70 A	6	13.75	13.75	48	CALL
	RS-12M	9 A	12 A	4.5	8	9	13	CALL
	RS-20M	16 A	20 A	5	9	10.5	18	CALL
	RS-35M	25 A	35 A	5	11	11	27	CALL
	RS-50M	37 A	50 A	6	13.75	11	46	CALL
	RS-70M	57 A	70 A	6	13.75	12.12	48	CALL
	RM-50A	37 A	50 A	5.25	19	12.5	50	CALL
	RM-60A	50 A	55 A	7	19	12.5	63	CALL
	RM-35M	25 A	35 A	5.25	19	12.5	38	CALL
	RM-50M	37 A	50 A	5.25	19	12.5	50	CALL
	RM-60M	50 A	55 A	7	19	12.5	63	CALL
	VS-20M	16 A	20 A	5	9	10.5	20	CALL
	VS-35M	25 A	35 A	5	11	11	29	CALL
	VS-50M	37 A	50 A	6	13.75	11	46	CALL
	SL-11A	7 A	11 A	2.75	7.62	9.95	11	CALL
	SL-15R	12 A	15 A	2.75	7.62	9.95	14	CALL
	SS-10	7 A	10 A	2.375	6	9	3.2	CALL
	SS-12	10 A	12 A	2.375	6	9	3.4	CALL
	SS-18	15 A	18 A	2.375	6	9	3.6	CALL
	SS-25	20 A	25 A	2.875	7	9.375	4.2	CALL
	SS-30	25 A	30 A	3.75	7	9.625	5	CALL
	SS-50	40 A	50 A	2.875	7	9.375	5	CALL
Diamond	GZV4000	40 A	42 A	4.5	8.25	13	8	CALL
	GZV6000	60 A		4.5	8.25	13	8	CALL
Daiwa	SS-330W	30 A	33 A	4	5	11	4.8	CALL
	SS-505	50 A	55 A	4.3	8.5	11	8.25	CALL
Kenwood	KPS-15	23 A	24 A	2.2	7	8.25	4	CALL
	PS-60	22.5 A	22.5 A	3.75	6.83	8.9	5.5	CALL
Powerwerx	SS-30DV	25 A	30 A	2.5	5	6.1	3	CALL
	SPS-30DM	25 A	28 A	2.5	5	6.1	3.7	CALL
Samlex	SEC1212	10 A	12A	2.2	7	8.25	3	CALL
	SEC1223	23 A	24 A	2.2	7	8.25	4	CALL
	SEC1235M	30 A	35 A	2.4	7.28	8.19	4.5	CALL
Yaesu	FP-1023	23 A	24 A	2.2	7	8.25	4	CALL
	FP-1030A	25 A	30 A	9.8	5.9	9.5	20.9	CALL

\* Internal Supply  
(220 volt versions of some models available at additional cost by special order. Contact HRO for details.)

## Switching Supplies



Daiwa switching power supplies are one-third the weight and one-half the size of conventional supplies. Daiwa models can be used for DC motors that

require peak starting currents and will accept input voltage from 90-130 V. Switching supplies can create pulse noise, but Daiwa engineers have isolated any noise and moved it out of the amateur bands creating a super quiet power supply.

Both models below have adjustable voltage 5-15 V., a built-in automatic cooling fan, a carry handle for portability, and are short-circuit protected.



### SS-330W 30 amp

- Dual meters, amp and voltage.
- Ripple voltage: less than 10 mV.
- 30 amps continuous current (33 peak).
- Weight: ONLY 4 lbs 14 ozs.
- Dimensions: 5" x 4" x 11" (approx).

HRO Price \$169.95



### SS-505 50 amp

- 50 amps continuous current (55 peak).
- 50 amps available at all output voltages.
- Binding posts on back, cigarette-lighter socket, spring loaded connectors on front.
- Voltage fluctuation: less than 1.5%.
- Dual purpose meter – amp and voltage.
- Weight: ONLY 8 lbs 4 ozs.
- Dimensions: 8.5" x 4.3" x 11" (approx).
- Ripple voltage: less than 5 mV.

HRO Price \$349.95

Call for Quotes



## MFJ-4128

Switching power supply delivers 28 A surge, 25 A continuous at 13.8 VDC. Selectable AC input voltage 85-135 and 170-260 VAC. 5-way binding posts, cigarette lighter socket, fan "on" LED indicator. 7 W x 2.25 H x 7.5 D and 4 lbs.



## MFJ-4215MV

15 amp switching power supply, 15A surge and 13A continuous. Variable 4-16 VDC with 1% voltage regulation. Backlighted volt / amp meters. 5-way binding posts for output. 5 W x 3.75 H x 7 D at 2.9 lbs.



## MFJ-4225MV

Similar to MFJ-4125, but adds large 3-inch amp, volt meters and cigarette lighter plug. 5.25 W x 4.5 H x 6 D inches. Weighs 3.7 pounds.

## Transformer Supply



## MFJ-4035MV

19.2 lb transformer delivers 35 A max, 30 A continuous. 1-14 VDC out, 110 VAC in. Highly regulated, 1% load regulation. 5-way binding posts, quick connects. It is a transformer supply, not a switching.



## MFJ-4235MV

Switching power supply gives 35 A surge, 30 A continuous. 4-16 VDC with 1% voltage regulation. AC input 90-125 or 200-240V. 7 W x 4.25 H x 8.75 D and 4 lbs.



## MFJ-4245MV

Similar to MFJ-4225 MV but handles 45 amps surge and 40 amps continuous. 7.5 W x 4.75 H x 9 D inches. Weighs just 5.5 pounds.



## MFJ-4275MV

75 amp switching power supply is great for powering your Ameritron ALS-500M amplifier. 75 A maximum and 70 A continuous. 110 / 220 VAC switchable. Highly regulated with load regulation better than 1%. Ripple voltage is less than 12 mV peak-to-peak at rated load. No RF hash. Short-circuit, overload, and over-temperature protection systems. Front panel adjustable voltage 4-16 VDC. Battery charging feature provides charging current of 20 A continuous, 30 mA trickle charge. 9-3/4 W x 5-1/2 H x 9-1/2 D inches.

## Super Tiny Supply



## MFJ-4115

Ultra-compact 15 amp switching power supply weighs just 1-1/2 pounds and is 3-3/4 W x 2-1/4 H x 7-3/4 D inches. Has overvoltage and over current protection. 17 A surge, 15 A continuous.

## Adjustable DC Output



## MFJ-4218MV

Ham radio's only adjustable 0-24 VDC output switching power supply! 18 A at 13.8 VDC, 9 A at 24 VDC. Backlighted volt / amp meters, 5-way binding posts. LED load fault indicator. 6 W x 2.25 H x 6.75 D and 2.2 lbs.

## Available with PowerPole Connectors



## MightyLite™

## MFJ-4125

Switching Power Supply. 25 amps surge, 22 amps continuous. No RF hash! Low ripple, highly regulated. Great review by QST magazine. Over-voltage and over-current protection circuits. Switchable AC input voltage, works from 85 to 135 VAC or 170 to 260 VAC. Replaceable fuse. Tiny 5.5 W x 2.5 H x 5.75 D inches. Weighs just 3.5 lbs.



## MFJ-4125P

This version available with 2 pair of Power-Poles® and 5-way binding posts on front panel, and quick connects on back




## MFJ-4230MV

30 amp switching power supply with switchable amp / volt meter. Super compact 5 W x 2-1/2 H x 6 D inches. 120 / 240 VAC switchable. Gives 25 amps continuous or 30 amps surge at 13.8 VDC. Front panel voltage adjustable 4 to 16 VDC.

MFJ-4230MVP is similar to MFJ-4230MV but adds a pair of PowerPoles™ on back.





# samlexamerica

**Samlex is THE power supply choice for radio manufacturers around the world. On the market for more than 20 years, these compact switching power supplies offer reliable power at a price consumers can afford.**

**ALL SAMLEX POWER SUPPLIES CARRY A 3-YEAR WARRANTY**

## For Base Stations



**SEC-1223 & SEC-1212**

The perfect lightweight companion for 100 Watt transceivers. Input 100-130 VAC; Output: 13.8 VDC @ 23 Amps; UL approved. Also works on 200-240 VAC input with a simple jumper change. Safety features: Current limiting; Short circuit protection; Overvoltage protection; Quiet temperature controlled cooling fan. The SEC-1212 has the same form factor as the SEC-1223 with output of 13.8VDC @ 12 amps.

• 3 year warranty - "no questions asked."

• Dim 7" w x 2.1" h x 7.1" d; 4.5 lbs.

**HRO Price SEC-1223 \$126.95**

**HRO Price SEC-1212 \$94.95**



**SEC-1235M**

This unit includes built-in volt and amp meters. 100-130 VAC, 13.8 VDC.

- Best power supply value available.
- Advanced switch-mode technology.
- Reliable power at minimum weight & size.
- Circuit innovations minimize output voltage ripple and RFI.
- Input voltage can be set at 120 VAC or 240 VAC (internal jumper setting).
- Front panel ammeter and voltmeter.
- Detachable power supply cord.
- UL listed to both USA & Canadian safety standards; FCC compliant **HRO Price \$129.95**



**SEC-1223BBM**

Samlex has combined the reliability of the SEC-1223 with the reassurance of the BBM-1225 battery backup module. The SEC-1223 23-amp unit automatically provides uninterrupted DC power from an external backup battery to your critical load in the event of an AC power outage. Once AC power is restored, the SEC-1223BBM will continue to seamlessly supply DC power to the load while providing a current-limited charge to the backup battery. Input: 100 - 130 VAC. Output: 13.8 VDC. **HRO Price \$144.95**

## Battery Backup



**BBM-1225 25 Amp**

**BBM-12100 100 Amp**

- Uninterrupted DC power in association with a power supply and battery.
- Instantaneous transfer of load between power supply and battery.
- Pre-set for 12 V power supply.
- Minor modifications for 24 V power supply.
- Use with any Samlex or other 12 V or 24 V DC power supply.

**HRO Price BBM-1225 \$49.95**

**HRO Price BBM-12100 \$129.95**

## Radio Cabinets



(SEC1212 shown)

### Base Station Radio Cabinets

Integrate your mobile radio with any Samlex desktop switching power supply to create an attractive and functional desktop base station unit. Cabinets are specifically designed for use with specific mobile radio models. **HRO Price \$42.95**

**SEC 1212** (radio not included)

**Samlex 12250** for Kenwood TM-281A.

**Samlex 12200** for Icom ID-880H-05, IC-2820H.

**Samlex 12333** for Yaesu FT-2900A.

# SOLAR POWER

## DC to AC Inverters



**PST-150-12 150 Watt**

**PST-300-12 300 Watt**

**PST-600-12 600 Watt**

**HRO Prices - CALL**

The PST series provides clean pure sine wave power. PST's commercial grade design is suitable for heavy duty loads, long periods of continuous operation and for reliable AC power.

- Quiet Operation with temperature controlled fan reduces energy consumption.
- Extremely low interference with other devices. Pre-set for 12 V power supply. GFCI protected outlets.
- Suitable for heavy duty loads, long periods of continuous operation & for emergency back up.
- Wide operating DC input range compatible with new high voltage alternators.
- Universal Protection Circuit: low voltage, over voltage, over temp, over load and short circuit.
- Safety certified to UL & CSA standards, FCC compliant.
- 2 year warranty.

## Solar Power



### Portable Kits

**MSK-90 90 Watt**

**MSK-135 135 Watt**

Whether you need to charge your 12V batteries during field emergencies or to get extended remote run-times for your equipment, always have the Samlex MSK Portable Solar Charging kit at your ready. Available in 90 and 135 Watt models, these MSK kits include a built-in, three-stage 10 Amp charge controller to protect batteries and prevent overcharging. Kits fold easily and compactly in a protective carry case for transport and storage and come with pre-wired battery clamps on a 16' cable. 2 year warranty.

**HRO Price MSK-90 CALL**

**HRO Price MSK-135 CALL**

# POWER SUPPLIES



## DM-430T Switching Power Supply

Compact, lightweight design features 9-15 VDC variable output up to 20 amps continuous and 30 amps peak. The noise offset circuit lets you move any switching noise to another frequency. Features large illuminated digital Volt / Amp meter, rear panel (30 A peak) binding posts, front panel quick terminals (5 A), banana poles for E, Anderson power poles for T, short circuit, over temperature, and current limiting protection. Front panel adjustable. **HRO Price \$Call**



## DM-330MVT

Super compact, lightweight power supply is great for portable operations. Provides 32 A peak, 30A continuous. Variable output 5-15 VDC. Preset voltage function. Patent pending noise offset circuit removes pulse noise. Short circuit protection. Convenient front panel connections. Cigarette plug socket. **HRO Price \$Call**



## DIAMOND



## Switching Mode DC Power Supply

## GZV4000 40 Amp

The GZV4000 switching mode DC power supply has a 40 amp continuous rating at 100% duty cycle. The supply has variable voltage from 5-15 VDC using a voltage control knob with a center detent at 13.5 VDC. There is overload and short circuit protection with current feedback at approximately 42 amps and temperature protection with a variable speed fan. An AC line filter gives EMI protection. The meter selector allows monitoring of voltage and current. Power and overload indicators included. Front panel DC terminals, a cigarette lighter jack, and an in-

ternal 8 ohm speaker. Operates on 120 VAC  $\pm 20\%$ , 50-60 Hz. Ripple and noise is less than 8 mV rms. 240 VAC models also available for GZV4000. **HRO Price: \$169.95**



## GZV6000 60 Amp

60 amp version. 100V-240V  
**HRO Price: \$369.95**

# BATTERIES



**BIOENNO  
POWER**

## Lithium Iron Phosphate Batteries

Bioenno Power's Lithium Iron Phosphate batteries are designed with ham radio applications in mind, and provide several key advantages:

- Based on advanced Lithium Iron Phosphate (LiFePO<sub>4</sub>) battery chemistry.
- Compatible with every brand (ICOM, Kenwood, Yaesu, Elecraft, etc.).
- Built-in protection-circuit-modules (PCM), which are "micro-computers" that internally balance cells and provide protection from overcharging, over-discharging, over-current, and short circuiting.
- 50% to 70% lighter than SLA (sealed lead acid) batteries.
- Service life of 2000+ charge cycles or 5-10+ years, with a shelf life that far exceeds the service life of many other batteries.
- Powerpole® connectors that are already attached and can connect directly to radios.
- Thermally and chemically stable.
- Dependable and reliable.

Based in Santa Ana, California, Bioenno Power products are currently used in a variety of applications and industries including ham radio, surveillance, avionics, scientific equipment, communications, audio/visual equipment, e-bikes/e-scooters, etc. with capacities ranging from 3 Ah up to 200 Ah.



## Bioenno Power BLF-1203W 12 Volt - 3Ah LFP Battery (PVC, BLF-1203W) - LiFePO<sub>4</sub> **HRO Discount Price: \$49.95**



## Bioenno Power BLF-1206W/A 12V, 6Ah LFP Battery (PVC, BLF-1206W/A) - LiFePO<sub>4</sub> **HRO Discount Price: \$79.95**



## Bioenno Power BLF-1209W/A 12V, 9Ah LFP Battery (PVC, BLF-1209W/A) - LiFePO<sub>4</sub> **HRO Discount Price: \$99.95**

## Bioenno Power BLF-1212W/A 12V, 12Ah LFP Battery (PVC, BLF-1212W/A) - LiFePO<sub>4</sub> **HRO Discount Price: \$124.95**



## Bioenno Power BLF-1215W/A 12V, 15Ah LFP Battery (PVC, BLF-1215W/A) - LiFePO<sub>4</sub> **HRO Discount Price: \$149.95**



## Bioenno Power BLF-1220W/A 12V, 20Ah LFP Battery (PVC, BLF-1220W/A) - LiFePO<sub>4</sub> **HRO Discount Price: \$192.95**



Please note that these batteries should be charged using a LiFePO<sub>4</sub> compatible charger, and not with a charger for SLA batteries.



# CABLE CONNECTORS

## NiMH Rechargeable Batteries



*Maha Energy, the maker of Powerex batteries and power solutions*

### NiMH Rechargeable Battery Cells



Powerex MH-C800S

### Powerex MH-RAA 4 PRO

HRO Price \$14.95

Low self-discharge, optimized for high drain devices. 1.2 Volts (Vdc), capacity 2700 mAh.



## Connectors

Model	Description	HRO Price
BNC-44	BNC to UHF Adapter	\$5.99
N-31	N to UHF Adapter	\$9.99
PL-259ST	PL-259	\$2.69
N-TGS	Type N Male	\$6.99
UHF-08	4 hole SO-239 Chassis Connector	\$4.99
UHF-10	Double Male UHF	\$5.99
UHF-11	UHF Barrel	\$4.99
UG-363-4	Long UHF-UHF Barrel	\$10.99
UHF-15-DGN	RT. Angle Teflon, Gold Pin	\$7.95
UHF-13	UHF "T"	\$5.99
UHF-19	BNC to UHF Adapter	\$6.99
UHF-18	UHF to N Adppter	\$8.99

## Battery Analyzer



### Computerized Battery Analyzer



CBA IV

The CBA is much more than a simple battery voltage tester or a battery load tester. The CBA will test virtually any type or size of battery, any chemistry, any number of cells up to 55 volts. For the first time and for a reasonable price, anyone can do scientific tests of their batteries by letting their computer do all the work. The CBA is capable of higher test rates than other testers: up to 40 amps or 150 Watts, whichever is higher. It not only tests the total amount of energy stored in a battery (capacity in amp-hrs), but it graphically displays and charts voltage versus amphotours. #58250-1014 **HRO Price \$149.95**

## Coax-Seal



Coax-Seal will seal all types of coax fittings, baluns, antenna parts and connectors of any shape. Adheres to most surfaces. Wrap Coax-Seal around the object you want to protect and then mold it into shape. Keeps moisture out of the coax fitting on antenna feed lines. Need to make a change? Just remove it and start over. **HRO Price: \$3.95 / roll**

## Cable Ties

*It's a Wrap!*

# BongoTies™

**Handy Ties for Cables  
and Other Unruly Items**



BongoTies have hundreds of uses around the office, home, garage, studio, and industry. Stop and look at all of those messy wires behind your computer right now! Each pack has 10 BongoTies, so this offer is for a total of 40 BongoTies. Sturdy reclosable bags with zip-lock tops. BongoTies are approx. 5 in. in length, and stretch to approx. 18-20 in. (Not for outdoor use.) **HRO Price \$6.99 for a bag of 10**

## CoaxWrap



CoaxWrap will provide your coax connections with outstanding protection from the weather. Just wrap the connection with the convenient roll. When you need access to the connection, the wrap removes easily. Available in red, white, blue, clear, and black. **Price per roll \$5.99.**

# COAX / ROTATOR CABLE

We have RF cable available from

**ABR Industries**



**BELDEN**

**CABLE X-PERTS**

**DAVIS RF**

**JSC**

**TIMES  
MICROWAVE**

## Coax

Purchase coax in any length up to 500 feet.

### RG8 / U

Standard RG8 /U, #13 stranded copper center conductor, cellular polyethylene insulation, 97% bare copper shield, PVC jacket, 50 ohm impedance, 78% velocity factor and 1.8 dB loss per 100' at 100 MHz. The most popular cable for HF/VHF/UHF. Use when long cable runs are not required.

### RG213 / U

RG-213 / U coax, #13 stranded copper center conductor, solid polyethylene insulation, 97% bare copper shield, non-contaminating PVC jacket, 50 ohm impedance, 66% velocity factor and 2.2 dB loss per 100' at 100 MHz. This RG-8 type cable is best for HF. It may be buried.

### 9913F-7

9913F-7 is RG8/U-type coax, #9.5 stranded copper conductor, foam polyethylene insulation, 100% foil plus 88% braid shield, PVC jacket, 50 ohm impedance, 84% velocity factor and 1.4 dB loss per 100' at 100 MHz. The best cable for VHF and UHF applications.

### RG8X

RG8X is small diameter coax, #16 stranded copper center conductor, cellular polyethylene insulation, 95% bare copper shield, PVC jacket, 50 ohm impedance, 78% velocity factor and 3.7 dB loss per 100' at 100 MHz. Good for short VHF runs and most HF uses.

## Rotator Cable

**8 wire, standard duty** - 8 wire cable using six #22 and two #18 tinned copper conductors. PVC insulation.

**8 wire, heavy duty** - 8 wire cable using 6 - #18 and 2 - #16 tinned copper conductors. PVC insulation; chrome PVC jacket.

### When Ordering Cable

Please order in multiples of 50 feet. Continuous length spools up to 500 feet are available. Call for quotes.

# ABR Industries

Complete Product attenuation information on Page 70

*ABR Industries manufactures coax with a non-contaminating, ultra-violet resistant, and direct burial jacket. Cables are American Made and are fully tested and ready to use.*

## Direct Bury Cable

**218XATC** - lightweight for mobile, dipole antennas, or jumpers between equipment in tight places. RG8X (LMR@240 type) with PL-259 connectors and adhesive lined HST at both ends. Jacket is UV resistant and direct burial.

RG8X-Direct Bury w/PL259		
218XATC-PL-1.5	1.5	\$18.95
218XATC-PL-3	3	\$18.95
218XATC-PL-6	6	\$19.95
218XATC-PL-9	9	\$21.95
218XATC-PL-12	12	\$24.95
218XATC-PL-18	18	\$28.95
218XATC-PL-25	25	\$29.95
218XATC-PL-30	30	\$32.95
218XATC-PL-40	40	\$35.95
218XATC-PL-50	50	\$37.95
218XATC-PL-75	75	\$44.95
218XATC-PL-100	100	\$54.95
218XATC-PL-125	125	\$69.95
218XATC-PL-150	150	\$79.95
218XATC-PL-250	250	\$129.95

## HT Jumpers

ABR Industries now supplies HT jumpers in various short lengths of RG316/U Teflon® .100" OD.

These can be had in 3, 6, 9, 12, and 15 foot lengths of SMA male to SMA female, or 3 and 6 foot lengths of SMA male at both ends, or SMA male to PL259 or SO239.

## Ground Braid

Also available are various lengths of 1-inch or ½-inch Tinned Copper Flat Ground Braid with ¼-inch stud ring terminals

And there are a few different lengths of ½-inch tinned copper with Nickel Grommets at 4" spacing for easy attachment to a vehicle body or truck bed to create a "ground plane" or an option as a buss-bar in the shack.

## Direct Bury Cable

**2213A** - UV resistant, direct bury. RG213/U Mil-Spec w/PL259 connectors and Adhesive lined HST at both ends. Solid polyethylene dielectric, high power, bands below 30MHz with amplifiers.

RG213/U w/PL259		
Part Number	Length (feet)	HRO Price
2213A-PL-1.5	1.5	\$18.95
2213A-PL-3	3	\$21.95
2213A-PL-6	6	\$23.95
2213A-PL-18	18	\$39.95
2213A-PL-25	25	\$44.95
2213A-PL-50	50	\$69.95
2213A-PL-75	75	\$98.95
2213A-PL-100	100	\$124.95
2213A-PL-150	150	\$179.95

**25400F** - (LMR® 400UF) UV resistant, direct-bury, for frequencies above 144 MHz. PL-259 connectors and adhesive lined HST at both ends.

RG8/U Direct Bury w/PL259		
25400F-PL-1.5	1.5	\$18.95
25400F-PL-3	3	\$21.95
25400F-PL-6	6	\$24.95
25400F-PL-12	12	\$27.95
25400F-PL-18	18	\$31.95
25400F-PL-25	25	\$44.95
25400F-PL-50	50	\$69.95
25400F-PL-75	75	\$97.95
25400F-PL-100	100	\$119.95
25400F-PL-150	150	\$174.95

**25400F** - (LMR® 400UF) UV resistant, direct bury, for frequencies above 144 MHz. N male connectors and adhesive lined HST both ends.

RG8/U Direct Bury w/N Male		
25400F-NM-3	3	\$24.95
25400F-NM-6	6	\$29.95
25400F-NM-12	12	\$35.95
25400F-NM-18	18	\$39.95
25400F-NM-25	25	\$49.95
25400F-NM-35	35	\$57.95
25400F-NM-50	50	\$78.95
25400F-NM-75	75	\$108.95
25400F-NM-100	100	\$129.95
25400F-NM-150	150	\$184.95



# CABLE ASSEMBLIES / CONNECTORS

## Cable Assemblies

### CABLE X-PERTS

#### Ready-Made Coax Cable Assemblies

Model	Connector Both Ends	Burial	UV Resistant	Shields	Attenuation dB @ 100 Feet	Best Frequencies
CXP 1318FC	PL259	Yes	Yes	2 (100% bonded foil + 95% TC Braid V/F 84%)	50 MHz 1.1 150MHz 1.9 450MHz 3.3	50-450 MHz
CXP 008C	PL259	No	Yes	1 (95% BC Braid) V/F 78%	10 MHz 0.51 30MHz 0.9 50MHz 1.2	1-50 MHz
CXP 1318FN	"N"	Yes	Yes	2 (100% bonded foil + 95% TC Braid V/F 84%)	150MHz 1.9 450MHz 3.3	150 MHz and Higher
CXP 08XC	PL259	No	Yes	1 (95% BC Braid) V/F 78%	10 MHz 0.98 30MHz 2.0	1 - 30 MHz
CXP 213C	PL259	Yes	Yes	1 (97% BC Braid) V/F 66%	10 MHz 0.62 30MHz 1.2	1 - 30 MHz (High Power)

#### RG213/U w/PL259

Part Number	Length (feet)	HRO Price
CXP213C100	100	\$104.95
CXP213C50	50	\$59.95
CXP213C6	6	\$21.95
CXP213C3	3	\$19.95

#### RG8/U Foam w/PL259

CXP008C100	100	\$99.95
CXP008C50	50	\$54.95
CXP008C25	25	\$38.95
CXP008C12	12	\$21.95
CXP008C6	6	\$16.95
CXP008C3	3	\$15.95

#### RG8X-Mini w/PL259

CXP08XC100	100	\$49.95
CXP08XC75	75	\$39.95
CXP08XC50	50	\$32.95
CXP08XC25	25	\$26.95
CXP08XC18	18	\$21.95
CXP08XC6	6	\$18.95
CXP08XC3	3	\$16.95

#### 9913-type Flexible w/N-Connector

Part Number	Length (feet)	HRO Price
CXP1318FN150	150	\$179.95
CXP1318FN100	100	\$139.95
CXP1318FN50	50	\$69.95
CXP1318FN25	25	\$44.95
CXP1318FN6	6	\$28.95
CXP1318FN3	3	\$20.95

#### 9913-type Flexible w/UHF Connectors

CXP1318FC100	100	\$119.95
CXP1318FC50	50	\$64.95
CXP1318FC6	6	\$21.95
CXP1318FC3	3	\$18.95

#### Tinned Copper Ground Braid

235	1" wide	\$1.89 / foot
2332	1/2" wide	\$0.89 / foot
235RT-5	1" 5' long*	\$14.95
235RT-10	1" 10' long*	\$19.95
2332RT-5	1/2" 5' long	\$12.95
2332RT-10	1/2" 10' long*	\$15.95

\* w/Ring Terminals

Visit HRO on the Web @ [hamradio.com](http://hamradio.com)  
for the Latest in Manufacturer's Specials

## Cable

# TIMES

Call for Low Discount Prices  
on Times Cable

#### LMR-200 – RG58 type

This is a standard RG58 'type' outdoor cable that is ideal for jumper assemblies, short antenna feeder runs, or any application requiring an easily routed, low loss RF cable. It has a solid BC inner conductor, foam polyethylene dielectric, aluminum tape outer conductor, a tinned copper overall braid and black polyethylene jacket. The velocity factor is 83%. It will withstand 1000VDC, a peak power of 2.5 kW, and shielding effectiveness is >90 dB.

#### LMR-240 – RG8X type

This RG8X 'type' outdoor cable has a solid BC inner conductor, foam polyethylene dielectric, aluminum tape outer conductor, a tinned copper overall braid and black polyethylene jacket. The velocity factor is 84%. It will withstand 1500 VDC, a peak power of 5.6 kW, and shielding effectiveness is >90 dB.

#### LMR-400 – RG8 / RG213 type

This is a standard RG8 / RG213 'type' outdoor cable that has a solid BCCA inner conductor, foam polyethylene dielectric, aluminum tape outer conductor, a tinned copper overall braid and black polyethylene jacket. The velocity factor is 85%. It will withstand 2500 VDC, a peak power of 16 kW, and shielding effectiveness is >90 dB.

#### LMR-400-UltraFlex

Similar specs as LMR-400 with TPE jacket.

## Coax & Connectors



Andrew coax and all the matching connectors you will need are available as a special order drop shipment. Contact your nearest HRO store for complete details.

Model #	Cable Type	Diameter Inches	\$/100 feet*
AVA5-50FX	Foam Dielectric	7/8 inch	CALL
FSJ4-50B	Superflex	1/2 inch	CALL

\*Plus Shipping



## AT-5K Antenna Tuner

The AT5K takes power handling to the next level over the AT4K, coming in with a rating of 3500 Watts single tone continuous performance with low losses and wide Z range.

Palstar's AT5K, like its AT4K little brother, has a T-matching network utilizing a 1:1 unbalanced-to-balanced transformer at the INPUT of the network.

- 3500 Watts single tone, high efficiency, low tuner losses and wide Z range.
- 160m to 15m with limited Z range on 10m.
- Balanced output with high power 5 kW Teflon® wire balun at the input of tuner circuit.
- Ferrite 1:1 input balun.
- Custom, large plate variable capacitors (600pF @ 6 kV).
- 10 Amp 7 kV CERAMIC 3.25" body roller inductor (35  $\mu$ H) wound with 10 ga. plated solid copper wire.
- Six-position switchable antenna input switch with 7 kV, 10 Amp contacts.
- Peak and peak hold dual cross-needle metering (1-2 sec hold) with backlighting.
- Fan cooling for extended 100% duty cycle operation.



## AT2KD Antenna Tuner

The AT1500DT and the AT1KP have been combined into a new 2kW tuner. The AT2K has all our features such as: peak and peak-hold; a resonant free roller system to operate from 6m to 160m continuously; new LED lit meter system; and a new compact size.

- Power rating 2000 Watts PEP.
- Frequency tuning 160m to 6m.
- Impedance matching range 20 ohms to 1200 ohms.
- Easy and quick tuning with only two controls.
- Palstar designed ceramic body roller inductor.
- 6 position mode switch for multiple antennas.
- Meter power range 0-300 Watts / 0-3000 Watts.
- Active peak and peak hold dual cross-needle metering (1-2 sec hold) with LED backlighting.
- Differential capacitor tuning with 2 stators and 1 rotor (420 pF - 13pF - 420pF @ 5kV).
- High power ferrite 1:1 or 4:1 current balun (optional) externally installed.
- Size: 12 1/2" x 5 1/2" x 16".
- Weight: 12 lbs.

**Optional 1:1 or 4:1 Current Balun available.**

## AT-2K Antenna Tuner

The smaller roller inductor allows the AT2K to tune 6 meters, while a relay-switched toroid adds the extra

inductance needed for 160 meter coverage. Newly designed capacitors feature lower minimum capacitance for improved high band performance, while maximum capacitance has been increased to 400 pF for better low band performance.

- Power rating 2000 Watts PEP.
- Impedance range 20 to 1500 ohm 160m to 10m (assuming resistive load).
- Low minimum custom variable capacitors (15pF to 400pF at 4.5 kV).
- 10  $\mu$ H relay-switched add-on inductor for 160 meters, roller inductor with turns counter.
- 18  $\mu$ H 5 kV ceramic body roller inductor with turns counter.
- Silver plated inductor wheel shaft and contact wheel.
- Active peak / peak hold cross-needle metering w/ backlighting.
- 6 position ceramic wafer antenna selector switch.

**Optional 1:1 or 4:1 Current Balun available.**



## AT4K Antenna Tuner

The AT4K has a power rating of 2500 Watts single tone continuous.

- Unbalanced / balanced output (switch activated on front panel) with high power balun at the input of tuner circuit.
- T match circuit: impedance matching range 8 - 2000 ohms.
- Custom large value (460pF) variable capacitors at 6 kV.
- Switchable antenna inputs.
- 10 amp edge-wound silver plated ceramic body roller inductors crank handle driven.
- Ferrite 1:1 input balun.
- Peak / peak hold dual cross-needle metering (1-2 sec hold) with backlight.
- Size: 15" x 7" x 16" deep.
- Weight: 20 lbs.



## AT-500 Antenna Tuner

Covering 160 to 6 meters, the AT-500 has a differential tuning capacitor with 2 stators and 1 rotor, a precision ceramic body roller inductor, and a 4:1 ferrite current balun for balanced line feeds.

- Power rating: 600 Watts PEP SSB; 500 Watts CW.
- Output to both balanced and unbalanced lines.
- Impedance matching range 20 ohms to 1500 ohms.
- 6 position mode switch for multiple antennas.
- Active crossneedle peak / peak hold metering with backlighting.
- Meter power range 0-300 Watts / 0-1000 Watts.
- Differential capacitor tuning with 2 stators and 1 rotor (360pF - 14pF - 360pF @ 2.5kV).

## Palstar Products

Model	Description	Price
<b>Amplifier</b>		
LA-1K	1KW solid state amplifier	\$3,795.95
<b>Antenna Tuners</b>		
HF-AUTOTUNE	1500 W Antenna Tuner	\$1,549.95
AT5K	3500 W Antenna Tuner	\$1,195.95
AT4K	2500 W Antenna Tuner	\$899.95
BT1500A	1500 W Balanced Antenna Tuner	\$779.95
AT2K	2000 W Antenna Tuner	\$579.95
AT2KD	1999 W Differential Antenna Tuner	\$579.95
AT500	600 W Antenna Tuner	\$489.95
<b>Wattmeters</b>		
PM2000A	2000 W Wattmeter 1.8Mhz to 60Mhz	\$199.95
PM2000AM	200 W Wattmeter mobile 1.8Mhz to 60Mhz	\$199.95
<b>Shortwave Accessories</b>		
SP30B	Speaker 12 Watts (for R30C/CC)	\$99.95
<b>Dummy Loads</b>		
DL1500	Dummy Load 1500 W - 450 Mhz	\$194.95
DL2.5KHP	Dummy Load 2500 W - 1.8-60 Mhz meter/fan	\$779.95
<b>Baluns</b>		
B4000N 4:1	Balun 4/1 4000W-Current-Hi-Z	\$89.95
B4000N 1:1	Balun 1/1 4000W-Current-Low-Z	\$89.95



*Smartuners™ are the most versatile and reliable antenna couplers available. Working with power levels from 1.5 to 500 Watts and with frequency ranges spanning the HF bands from a single antenna, they provide all-purpose tuning ideal for base, mobile, or portable operation. Just provide 12 V, connect to transceiver, antenna, and ground, and get on the air with minimum SWR. Visit [sgcworld.com](http://sgcworld.com) for a detailed review of the Smartuner family, and find the right one for your needs. Stop tuning, start talking.*

## The Original Smartuner™

**SG-230** 54-14  
**\$499.95**

The SG-230 Smartuner was the first product in the HF market to offer fast, flexible tuning without any user interface. It is built in a rugged, factory sealed ABS enclosure. With this tuner and any single antenna, you will have continuous coverage from 1.8 to 30 MHz and it can be used with any transceiver you'll ever own. The SG-230 can be used in base station, mobile, marine and aviation applications, and has been the "Gold Standard" of automatic antenna tuning for more than a decade.



## The Budget Smartuner™

**SG-239** 54-22  
**\$185.95**



Get quality performance from a low cost package. The SG-239 will operate from 1.8 to 30 MHz with 1.5 to 200 W. Like all Smartuners, it gives you the most flexibility because it will work with any antenna and any transceiver. It also has push buttons for a manual tune option. It weighs only 2 pounds, so you can use it for base or portable.

## HF Antenna Coupler

**SG-235** 54-15  
**\$1099.95**



This fully automatic coupler for 500 Watts will tune an antenna at least 23 feet long for the HF bands. The SG-235 automatically evaluates and switches 64 input and 32 output capacitor combinations plus 256 inductance combinations in a pi network design. The tuner remembers the chosen frequency and tuning values and automatically reselects those values when transmitting on that frequency.

## The General Purpose Smartuner™

**SG-237** 54-18  
**\$299.95**

The SG-237 is the most popular Smartuner. Its rugged construction and small size allow for maximum flexibility. It has a 100 W power rating and expanded coverage to 60 MHz, matching it perfectly with the most popular HF + 6m transceivers. It will work with any balanced or unbalanced antenna including whips, backstays, dipoles, loops and long wires.



## Mobile Tuner



## TARGETuner

#58425-1473 HRO Price **\$234.95**

TARGETuner mobile antenna management system provides a controller with intelligent automatic controls for the tunable mobile screwdriver antenna, and a remote RF module.

- Senses RF signal into the antenna.
- No radio data link required for band selection.
- Direction switch and motor control of speed and direction.
- Programmable for stall current sensing.
- Easy programming and memory capabilities.
- Auto tuning.

## SGC Smartuners

Specifications	SG-230	SG-235	SG237	SG-239
PEP Input (W)	3-200	3-500	3-100	1.5-200
CW Max Input (W)	80	200	40	80
Frequency (MHz)	1.8-30	1.8-30	1.8-60	1.8-30
Input Current (A)	0.9	1.4	0.3	0.23
Antenna Length (<3.3MHz)	8 ft	50 ft	8 ft	40 ft
Antenna Length (>3.3MHz)	23 ft	300 ft	28 ft	100 ft
Dimensions (in)	16x12x3	16x12x3	7x6x1.5	7.5x6x2
Weight (lbs)	8	8	2	2
Water resistant	yes	yes	yes	no
HRO Price	\$499.95	\$1,099.95	\$299.95	\$185.95

## Remote Tuner

**A Technological  
Breakthrough in Remote  
Tuning!**



**RT-600 /  
RC-600**

### Automatic Antenna Tuner / Remote Control

The RT-600 is a 600 watt PEP coax in / coax out remote tuner designed to be placed near the feedpoint of the antenna. If you are worried about power or signal loss due to SWR in your feedline, the RT-600 is the answer. Place the RT-600 near the feedpoint and it will virtually eliminate all feedline loss due to SWR. DC powered over the coax by the RC-600 control unit (included).

- 2000 memories for instantaneous band changing.
- 1.8 to 54.0 MHz coverage. Built-in frequency sensor.
- For dipoles, verticals, Vs, beams or any coax-fed antenna. Optional external balun allows tuning of random length, long wire or ladder line fed antennas.

**HRO Price \$449.95**



**RT-100 / RC-100**

### Automatic Antenna Tuner / Remote Control

Place this 100 watt coax-in / coax-out tuner near the feedpoint of the antenna and it will virtually eliminate all feed line loss due to SWR. The RT-100 is DC powered over the coax, so no extra cables are needed. Add your own DC injection circuit or use the LDG RC-100 to power and control the tuner from your shack.

The RC-100 will provide DC power over the coax as well as control for auto mode, lock, and tune.

**HRO Price \$229.95**



## Yaesu Matching



**YT-1200**

### Desktop Tuner for Yaesu Tranceivers

Seamless integration with FT-450 series, FT-950, FTdx-1200 and FTdx-3000. The YT-1200 includes a CAT/power cable. Just press the button on the tuner and everything else happens automatically. The mode is set to carrier, a tune cycle runs and the radio is returned to its original settings. **HRO Price \$259.95**



**Z-817  
Automatic  
Tuner  
for the  
Yaesu  
FT-817**

The Z-817 automatic tuner, operating on 160 – 6 meters, attaches to the CAT port with the provided cable. Press the One-Touch-Tune button on the tuner and the Z-817 sets mode and power on the radio, tunes, then restores mode and power. Tuning time is 0.2 seconds for recalling one of its 2000 memories, and average time for a full is 2.5 seconds. The Z-817 also works with any QRP radio with output of up to 20 Watts. Press the tune button on the tuner while transmitting a carrier and it finds a match. Includes one foot CAT interface cable. Has CAT-thru port to allow computer control of radio. Tuning range of SWR loads from 6 to 450 ohms. It is powered by four AA batteries (not included). Size is 4.5 x 4.5 x 1.5". **HRO Price \$113.95**

## Rig Matching



**IT-100**

### Especially for Icom Radios

The ideal tuner for IC-7300 and other Icom radios covers all frequencies from 1.8 – 54 MHz and will automatically match your antenna in a flash. Tunes 1 to 125 Watts SSB, CW and digital modes. Has a front panel push button for manual or automatic tune plus a status LED. Tune with the IT-100 or use your radio. Includes more than 2,000 memories. Uses latching relays. Tuning range is 4 – 800 ohms, powered by your radio. Includes Icom interface cable. **HRO Price \$159.95**



**YT-100**

### Auto Tuner for Yaesu Transceivers

The YT-100 includes a cable that connects with your FT-857, FT-897 or FT-100 (including all D models) to make it an integrated tuner powered by the interface. Press the tune button, and everything else happens automatically: mode and power are set, a tune cycle runs, and the radio is returned to its original settings. Handles RF power from 1 to 100 Watts. CAT thru port for radio computer control. 2000 memories. 1.8 – 54 MHz coverage. **HRO Price \$164.95**



**KT-100**

### For Kenwood AT-300 Compatible Transceivers

The KT-100 allows uses the TUNE button on any AT-300 compatible Kenwood transceiver. Front panel LEDs indicate tuning status and show a match in seconds. The KT-100 has 2000 memories for band and frequencies. Using the supplied cable, plug the unit into your transceiver. **HRO Price \$174.95**



(radio not  
included)

**AT-897Plus**

### Auto Tuner for the Yaesu FT-897

The microprocessor controlled AT-897Plus mounts on the side of your FT-897 just like the original equipment. A front panel button initiates the tuning sequence while lowering the RF power to 25 Watts and will bypass the tuner if pressed momentarily. The AT-897 takes power directly from the CAT port of the FT-897 and provides a second CAT port on the back of the tuner. Tunes any coax fed antenna. Use a balun for long wires. **HRO Price \$199.95**

**All LDG products come with  
a Two-Year Transferable Warranty**



## Tune Two Antennas

### AT-1000Proll



The AT-1000Proll features an auto mode that automatically starts a tuning cycle any time the SWR exceeds a limit you set. Tune two antennas and switch between them. 2000 memories store tuning parameters for each antenna. The unit operates at any power level between 5 and 1000 Watts peak RF input. A large, easy-to-read LED bargraph has two selectable ranges. It will tune from 1.8 to 54 MHz matching a wide range of antennas.

**HRO Price: AT-1000Proll \$519.95**



### AT-100Proll

This automatic desktop tuner covers 1.8 – 54 MHz. A two-position antenna switch allows you to switch instantly between two antennas. The AT-100 Proll requires just 1 Watt for operation, but will handle up to 125 Watts, making it suitable for everything from QRP to a typical 100 Watt transceiver. It includes more than 2,000 memories for each antenna, automatically storing tuning configurations for each frequency and band as you use them. Includes antenna and bypass indicators on front panel.

**HRO Price AT-100Proll \$209.95**



### AT-600Proll

**M-600 meter optional**

The AT-600Proll will handle up to 600 Watts SSB and CW, 300 on RTTY (1.8 – 30 MHz), 250 Watts on 54 MHz.

- Processor-controlled switched-L tuner.
- Matches coax-fed antennas. Matches 10:1 SWR down to 1.5:1.
- Use with longwires, random wires and antennas fed with ladder line by adding an optional balun.
- Two antenna ports.
- Requires 11-16VDC at 750mA.

**HRO Prices: AT-600Proll \$349.95**  
**M-600 Meter optional \$119.95**

## Low-Cost Tuner

### Z-100Plus



#### Definitive low cost auto tuner!

Designed to provide 125 Watt power handling in SSB, CW and digital modes, the Z100 Plus features 2000 memories that store both frequency and tuning parameters. Operating frequencies are stored with tuning parameters to make memory tunes in a fast 0.1 seconds. Full tunes take an average of only 6 seconds. The tuner will run on any voltage source from 7 – 18 volts. Six AA batteries (not supplied) will run it for a year of normal use.

**HRO Price \$135.95**

## Portable Tuner

### Z-11Proll



#### Now Includes Battery Pack

Here is everything you need in a small, portable tuner designed for battery operation. Only 5" x 7.7" x 1.5" and weighing 1.5 pounds, it handles 0.1 to 125 Watts, making it ideal for both QRP and standard 100-Watt transceivers from 160 – 6 meters. With 8,000 memories, the Z-11 Proll uses a state-of-the-art processor-controlled switched-L tuning network. It matches dipoles, verticals, inverted-Vs or virtually any coax-fed antenna. With an optional LDG balun, it will also match longwires or antennas fed with ladder-line. **HRO Price \$154.95**

## For High Power

### AT-200Proll



#### The first auto tuner designed for high-powered transceivers

The AT-200Proll handles up to 250 Watts SSB or CW on 1.8 – 30 MHz, and 100 Watts on 54 MHz **(including 6 Meters)**. Rugged and easy-to-read LED bar graphs show power and SWR. A function key on the front panel allows you to access data such as mode and status. An LED indicates bypass mode and another shows which antenna is selected. **HRO Price \$239.95**

## SWR for Yaesu



### FTL-Meter

**for the Yaesu FT-897 / 857**

The large, easy-to-read FTL-Meter is a plug-and-play solution to your metering needs for the FT-857(D) and FT-897(D). Attach to the meter jack at the front of the rig. LDG's new version presents a lush, highly readable 4.5 inch meter face with calibrated scales for signal strength and discriminator reading on receive, power output, SWR, modulation, ALC action and supply voltage on transmit. Functions are selectable from the radio's menu. "4.5" meters also available for IC-7600 and IC-7700. **HRO Price \$79.95**



*(radio not included)*

### FT-Meter – Blue for the Yaesu FT-897 or FT-857

LDG's Blue FT-Meter has a highly readable 2.5" meter face with calibrated scales for signal strength and discriminator reading on receive, power output, SWR, modulation, ALC action and supply voltage on transmit. Each function is selectable from the radio's menu. Easily visible from anywhere on your desk or dash, the FT-Meter is illuminated by any external 12 VDC source. It comes fully assembled and ready to go; just plug it into the radio. **HRO Price \$54.95**

**HRO Ships from  
Your Nearest  
Store**

## HF Roller Inductor



### MFJ-962D

Handles 1.5 KW PEP SSB amplifier input power (800 W output). Peak-reading cross-needle SWR / Wattmeter, AirCore™ roller inductor.



### MFJ-969

Covers 6 thru 160 meters! 300 Watts PEP SSB. TrueActive™ peak-reading SWR / Wattmeter, antenna switch, built-in dummy load, 4:1 balun, Lexan® front panel. 3-1/2 H x 10-1/2 W x 9-1/2 D inches.



### MFJ-989D

The world's most popular legal limit antenna tuner! Easily handles 1500 Watts SSB / CW, 1.8 to 30 MHz including MARS / WARC bands. 500 pF air variable capacitors, AirCore™ roller inductor with fast-tune crank knob, TrueActive™ peak-reading cross-needle SWR / Wattmeter, high voltage current balun, more! 12-7/8 W x 6 H x 11-5/8 D inches.



### MFJ-986

Similar to MFJ-989D, but "D" has 2-knob tuning (differential capacitor and AirCore™ roller inductor) to make tuning fool-proof and easier than ever.

## HF Switched Inductor Tuners



### MFJ-904H

MFJ brings you the world's smallest full power 150 Watt 80-10 Meter Antenna Tuner 3.5 to 30 MHz – with 4:1 balun AND SWR / Wattmeter! Extra wide matching range lets you tune nearly any antenna. Its no toy – its got guts! Built with real air variable capacitors (600 Volt, 322 pF) and three stacked powder iron toroids to handle real power -- not just QRP. Bypass switch lets you bypass tuner when you don't need it. You can use nearly any transceiver at full power with nearly any coax fed or random wire antenna for portable, home, or mobile operation. SO-239 connector. 7-1/4 x 2-1/4 x 2-3/4 inches.



### MFJ-902B

Tiny Travel Tuner, 4-1/2 x 2-1/4 x 3", full 150 W, 80-10 M, tuner bypass switch.



### MFJ-901B

Wide range 200 Watt PEP versa tuner. Covers 1.8 to 30 MHz.



### MFJ-949E

More hams use MFJ-949s than any other antenna tuner! 300 Watts, 1.8 to 30 MHz, custom inductor switch, 1000 volt tuning caps, full size peak / average lighted cross-needle SWR / Wattmeter, 8 position antenna switch, dummy load, scratch proof Lexan® front panel. 3-1/2 H x 10-5/8 W x 7 D inches.



### MFJ-948

Economy version of MFJ- 949E, less dummy load, Lexan® front.



### MFJ-945E

HF / 6 meter mobile tuner. Extends mobile antenna bandwidth. Tiny 8 x 2 x 6" fits easily in car.



### MFJ-941E

Super value tuner handles 300 Watts PEP, covers 1.8-30 MHz, lighted cross-needle SWR / Wattmeter, 8-position antenna switch, 4:1 balun, 1000 volt capacitors.



### MFJ-931

Artificial RF Ground. Creates artificial RF ground or electrically places far-away RF ground directly at rig. Includes 300 W tuner with cross-needle SWR / Wattmeter.



### MFJ-971

Portable / QRP tuner tunes coax, balanced line, random wire 1.8-30 MHz. 30 / 300 or 6 Watt ranges. Matches MFJ QRP rigs. 6 x 6-1/2 x 2-1/2 inches.

## Manual Tuners



### MFJ-906 / 903

6 Meter Tuners. MFJ-906 has lighted Cross-Needle SWR/Wattmeter with bypass switch. Handles 100W FM/200W SSB. MFJ-903 is without SWR/Wattmeter and bypass switch.



### MFJ-921 / 924

VHF / UHF Tuners. MFJ-921 covers 144 / 220 MHz. MFJ-924 covers 440 MHz. Both include SWR / Wattmeter. 8 W x 2.5 H x 3 D.



## Automatic Tuners



### MFJ-993B

300 Watt automatic HF antenna tuner is like the MFJ-929, but you can select 300 Watts (6-1600 Ohms matching range) or 150 Watts (6-3200 Ohms matching range). Also has 4:1 current balun, remote control port.



### MFJ-994B

600 Watt Intelli-Tuner™. Like MFJ-993B, but has 10,000 VirtualAntenna™ memories and handles 600 Watts CW / SSB, matches 12-800 Ohms. Does not have LCD display, antenna switch or 4:1 balun.



### MFJ-998

1500 Watts SSB / CW Intelli-Tuner™. Digital and analog SWR / Wattmeter, ultra-fast, automatic tuning, wide range (12-1600 Ohms from 1.8 to 30 MHz), radio interfaces, built-in antenna switch for two coax / long wire, automatic bypass to protect your amplifier, field upgradeable software. MFJ-998RT with MFJ-4117 Bias Tee also available for remote use.



### MFJ-991B

First dual-power level Automatic Tuner: 300 W / 6-1600 Ohms, 150 W / 6-3200 Ohms. 10,000 virtual antenna memories. Cross-needle SWR / Wattmeter.

## Random Wire Manual

### MFJ-16010

Random Wire Tuner. Operate all bands anywhere with MFJ's reversible L-network. 1.8-30 MHz. 200 W PEP. Tiny at 2 W x 3 H x 4 D. Turns a random wire into a powerful transmitting antenna.



### MFJ-939/K/Y

From 2 to 200 Watts automatic antenna tuner. Plug and Play for ICOM, Yaesu, Alinco and other HF rigs. Has 20,000 memories, covers 1.8-30MHz, powered by transceiver and includes interface cable. Requires adjustment of internal jumper and cable for specific radio. Audio SWR meter, small size, instant recall and fast tuning.




### MFJ-929

200 Watt automatic HF antenna tuner in a compact size 6-1/2 W x 2-7/8 H x 8-3/8 D inches. Ultra-fast, 20,000 VirtualAntenna™ Memories, antenna switch, efficient L-network, matches 6-1600 Ohms, 1.8-30 MHz. Digital SWR / Wattmeter, radio interface.



### MFJ-926B

200 W HF remote automatic tuner. Matches random wire or coax feed. Fully weather sealed for remote outdoor/marine use. Includes MFJ-4117 Bias-Tee.

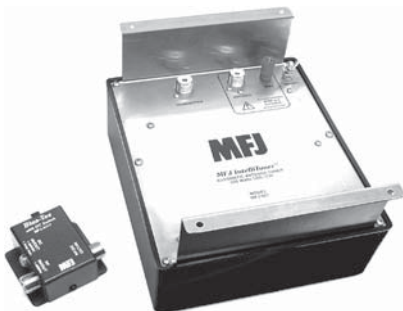

### MFJ-927

Weather protected, fully automatic remote auto tuner for wire and coax antennas. 200 W, powers through coax, no separate power cable needed.


## Surge Protector

### MFJ-270



Safeguard your expensive gear from static electricity and lightning induced surges traveling on 50 Ohm coaxial line. Ultrafast gas discharge tube safely shunts up to 5000 amps of peak impulse current harmlessly to an independent ground. SWR less than 1.1:1. Less than 0.1 dB loss. Use up to 1000 MHz. Handles 400 W PEP. MFJ-270N has low loss N-connectors. MFJ-272 with SO-239s, handles 1.5 kW PEP.

## HF Antenna Switches



### MFJ-1702C

2 position antenna coax switch. New center ground, lightning arrestor. 2.5 kW PEP, 1 kW CW. Loss below .2 dB. 50 dB isolation @ 450 MHz. 50 ohms. 3 x 2 x 3 inches.



### MFJ-1704

Like MFJ-1702C. 4 positions. 6.25 x 4.25 x 1.25 inches. 50 ohm load. SWR 1.1: 1 to 30 MHz; 1.5:1, 30-650 MHz. SO-239.



### MFJ-1701

6 position antenna switch, 50-75 ohms. Handles 2 kW PEP or 1 kW CW. 1.8-30 MHz. SO-239 connectors. Unused positions automatically grounded.

### MFJ-1700C

6 position antenna and transceiver switch switches between 1-6 antennas and 1-6 rigs. Handles 2 kW PEP or 1 kW CW, 1.8 to 30 MHz.



# LIGHTNING PROTECTION / COAX SWITCHES

## Lightning Protected Coax Switches

### ALPHA DELTA



**Delta-4B**

#### 4 Position Switch

This lightning protected 4 position RF coax

switch uses the Alpha Delta ARC-PLUG® cartridge to protect your equipment from electrical surges. The exclusive center "off" (ground) position internally disconnects and grounds all antenna circuits. It has cast housing with constant impedance micro-strip cavity construction. Features a positive detent roller bearing switch drive. Handles full legal power. Delta-4/N for type "N" connectors. The Delta-4 handles frequencies through 500 MHz and the Delta-4/N through 1.3 GHz. **HRO Price \$94.95; Type N \$99.95.**




**Delta-2B**

#### 2 Position Switch

This 2 position

coax switch has the same features as the Delta-4. Order UHF or type "N" connectors for low-loss performance through 1.3 GHz. **HRO Price \$74.95; Type N \$84.95.**

### Antenna Selector Console Desktop Coax Switch



This series retains all the features and specifications of the precision **DELTA-4B** series, including ARC-PLUG® module surge protection, in a desk top console that will sit right next to the equipment on your desk without having to be secured or bolted down. The console features a powder-coated steel housing and a solid brass ground buss, with #10 wire attachment hardware across the rear of the housing providing a common ground point for all station equipment and accessories.

**Model ASC-4B** Antenna Selector Console Switch (4 position, UHF Connectors thru 500 MHz). **HRO Price \$149.95**

**Model ASC-4B / N** Antenna Selector Console Switch (4 position, N Connectors thru 1.3 GHz). **HRO Price \$159.95**

### ALPHA DELTA

### Transi-Traps



The **ATT3G50** coaxial surge protector was designed for the cellular, microwave point-to-point, and the broadband wireless industry. These products feature very low loss performance through 3 GHz for 50N models and 500MHz for 50U models. Typical loss is 0.1 dB at 1 GHz through 0.5 dB at 3 GHz. This series represents the lowest loss broadband design in the industry. Choose connector: type "N" (50N models) or "UHF" (50U models).

The Defense Logistic Agency (DLA) has assigned National Stock Number (NSN) 01 5470278 to the Model TT3G50 Coax Surge Protector and NSN 5325 01 5466841 to the 3G50 ARC-PLUG® Cartridge for use in all US Military and NATO applications, worldwide.

#### ATT3G 50N

200 W – 3.0 GHz, Type N \$59.95

#### ATT3G 50NHP

2 kW – 3.0 GHz, Type N \$59.95

#### ATT3G 50U

200 W – 500 MHz, UHF \$49.95

#### ATT3G 50UHP

2 kW – 500 MHz, UHF \$49.95

## HF Antenna Switches



**DAIWA**

### 2 Position Coax Switch

**CS-201**




Daiwa has two heavy-duty coaxial switches. Both are usable to 500 MHz and the unused positions are grounded. Switches are available at slightly higher prices with type "N" connectors. **HRO Price \$32.95**

**DIAMOND  
ANTENNA**

### 2-Position Coax Switch

**CX-210A**



Diamond's heavy-duty wideband coax switch, the CX-210A, is a high quality 2 position coax switch with SO-239 connections. Like most Diamond products, this switch is very well built and durable. Two screws on the back allow you to mount the switch to a flat surface. **HRO Discount Price: \$49.95**

## Ground Clamp



**Model  
UCGC**

The UCGC clamp mounts directly on a standard 5/8" copper ground rod. You can attach up to 4 Model ATT 3G50 series coax surge protectors. The ground clamp is made from solid copper and has stainless steel mounting hardware with 6 bolts, washers, and nuts. It includes an adjustable copper ground wire clamp for your station single point ground wire of up to 4 gauge in size. **HRO Price \$49.95**



## Lightning Protection

### PolyPhaser<sup>®</sup> CORPORATION

#### Coaxial Impulse Suppressors

Hermetically-sealed voltage sensitive gas tubes and other components assure that surge voltages and currents will not reach your equipment.

#### Flange Mounts

HRO Price

\$61.95 - \$63.95



Model	Frequency Range MHz	Maximum Power Watts
IS-50 UX-CO	1.5-700	HF - 2 kW
		VHF - 375 W
		UHF - 125 W
IS-50 NX-CO	1.5-700	HF - 2 kW
		VHF - 375 W
		UHF - 125 W
IS-50 NX-C2 w/ N conn.	125-220 220-700 700 MHz	VHF - 375 W
		UHF - 125 W
		1 GHz - 50 W

#### Bulkhead Mounts

HRO Price \$64.95

Type-N HRO Price \$65.95



Model	Frequency Range MHz	Maximum Power Watts
IS-B50 LU-CO-ME	1.5-400	HF - 2 kW
		VHF - 375 W
		UHF - 125 W
IS-B50 HN-CO w/N connector	1.5-700	HF - 3 kW
		VHF - 500 W
		UHF - 200 W

#### Rotator Control Protector

Model IS-RCT

Provides protection for rotator controllers, motors, control box and other nearby equipment.

HRO Price Call

#### Power Line

#### Extension Protector

Two-outlet extension cords with master on/off switch and circuit breaker.

Model	Length	HRO Price
IS-PLDO-120-15A	15'	120 V@15 A Call
IS-PLDO-120-20A	6'	120 V@20 A Call

#### Grounding Panel

Model CU-SPGP

A .062" thick copper plate mounted on a painted 1/2" plywood backing. Mounting protectors and a single ground point established for station equipment. Comes with concrete anchors, all mounting screws, 10' of 1.5" copper grounding strap, 2 brass sandwich plates, and joint compound. 18" x 12". HRO Price \$CALL

## Baluns



200 Watts 1.8 to 30 MHz

HRO Prices

RBA-4:1	Remote 4:1 Balun	\$29.95
RBA-1:1	Remote 1:1 Balun	\$29.95
RU-4:1	Remote 4:1 UNUN	\$27.95



The RadioWavz baluns are designed to handle full legal power with a low SWR.



1:1 Air	B11a	\$29.95
1:1 Ferrite	B11f	\$39.95
1:1 Isolation	B11i	\$39.95
1:4 Voltage Air	B14va	\$34.95
1:4 Voltage Ferrite	B14vf	\$38.95
1:4 Current Air	B14ca	\$42.95
1:4 Current Ferrite	B14cf	\$49.95
1:6 Current Isolation	B16ci	\$45.95
1:9 Balun Isolation TX	B19tx	\$40.95

## Insulators



#### End-Sulator

A shatterproof and durable alternative to the common ceramic insulator - light weight with a long leakage path - approx. 5.6" length. HRO Price (pair) \$6.95



#### Delta-C

Dipole kit with center insulator with SEP static suppressor and 2 end Insulators, no wire. HRO Discount Price: \$29.95



#### W2AU Series Baluns

W2AU is a transformer style balun using a solid ferrite core that operates at a low VSWR from 1.8 to 40 MHz, and handles powers up to 2 KW PEP (at SWRs of less than 3:1).

Hand built in rugged weatherized packaging, using US stainless steel hardware, and built-in lightning arrestor.

The 1:1 matches 50(75) ohms unbalanced coax to 50(75) balanced dipoles. The 4:1 matches 50(75) ohm unbalanced coax to 200(300) ohm folded dipoles. These also come in Beam and Ladder Line versions.

Our INLINE baluns include line isolation along the coax transmission system and great to use on Quad and Yagi antennas.

Our CURRENT type balun uses ferrite sleeve to choke RF current on the cable shield preventing harmonic radiation.

Unadilla's W2AU 1:1 baluns handle 2000 Watts and match 50-75 ohms coax to 50-75 ohms balanced. It has 1 to 1 impedance ratio and covers 1.8 to 40 MHz. Beam versions are available with pigtails to connect to driven elements.

HRO Prices

W2AU 1:1	\$32.95
W2AU 4:1	\$32.95
W2AU 1:1 Beam	\$33.95
W2AU 4:1 Beam	\$33.95
W2AU 4:1 Ladder Line	\$34.95
W2AU 1:1 INLINE (dual SO239)	\$34.95



#### W2DU HF

W2DU Maxi-Baluns have extremely high power capability because they contain no ferrite cores to saturate. Even at high SWR levels, the W2DU baluns won't generate harmonic radiation. The internal feed line passes through ferrite beads which prevent RF current from flowing on the coax shield. Also available for VHF. HRO Price \$34.95

## HF + 6m Verticals

### AV-640

Uses quarter wave stubs on 6, 10, 12, and 17 meters and efficient end loading coil and capacity hats on 15, 20, 30, and 40 meters. No radials. No traps. No ground. No tuning. Handles 1500 Watts. Sleek, low profile. Small area required for mounting. Automatic bandswitching, single coax cable feed, each band is individually tunable, wide VSWR bandwidth.



### AV-620

Covers all bands 6 through 20 Meters.



### AV-680

No ground or radials needed. 6-80 m, 26 ft tall, 18.5 lbs. 1500 W key down for two minutes. 1/4 wave stubs on 6, 10, 12, and 17m. Wide, low SWR bandwidth. Auto band switching. Low 2.9 sq ft wind surface, mounts on decks, roofs, patios. 65 mph wind survival.

*All Hy-Gain multi-band vertical antennas are entirely self-supporting. No guying required. Their extremely low angle of radiation and omnidirectional patterns offer remarkable DX performance. All handle 1500W PEP SSB and have low SWR. All except the AV-18VS have automatic band switching, and all except the AV-18HT include a 12-inch heavy duty mast support bracket. Radiators are heavy duty, slotted, tapered swaged, aircraft aluminum tubing with full circumference compression clamps. All include all stainless steel hardware. Recessed SO-239 prevents moisture damage. Two year limited warranty.*

## HF + 160

### AV-18HT

#### AV-18HT

The famous Hy-Gain HyTower, 53 ft tall, 114 lbs, covers 10-80 m with 160 m and 17 m optional. Automatic band selection uses unique stub-decoupling. 250 kHz 80 m bandwidth with 2:1 SWR. LC-160Q optional base loading coil for 160 m and MK-17 optional 17 m kit. Special tilt-over hinged base for easy raising and lowering.



### DX-88

#### 10-80 + 160 Optional

10-80 m with 160 m optional, 25 ft tall, 18 lbs. All bands are easily tuned with exclusive adjustable capacitors. 80 / 40 m tuneable from ground without lowering antenna. Super heavy-duty construction. Options include **Kit-160-88** for 160 m add-on, **GRK-88** ground radial system, and **RRK-88** roof radial system.

### DX-88

## 6-160 Meters

### AV-6160

#### AV-6160

6-160 m, 43 ft tall, 20 lbs, low profile, self-supporting vertical assemblies in less than an hour. Entire length radiates for exceptionally low angle radiation. A wide range automatic or manual antenna tuner at your rig easily matches this antenna for all bands. Includes ATB-65 base mount. Optimized balun design allows direct coax feed.

*Hygain sells a large assortment of multi-band beams, wire antennas, and other verticals. Ask about baluns, aluminum tubing, and parts.*

## HF Verticals

### DX-77A

10-40 m, 29 ft tall, 25 lbs. No ground radials required. Off-center-fed Windom has 55% greater bandwidth than competitive verticals. Heavy-duty tiltable base. Each band independently tunable.

### AV-18VS


Covers 80 through 10 m continuously. Easily change bands by manually moving band change wire at base loading coil. Handles 1500 W PEP. 18 ft tapered 6063-T6 aircraft aluminum tubing strength. 4 lbs. Stainless steel hardware. 80 mph wind survival.

### AV-12AVQ

10-15-20 m, 13 ft tall, 9 lbs. Automatic band switching, self supporting. 1500W, Hy-Q™ traps give full 1/4 wave performance with broad banding top hat. SWR less than 2:1. Ground or roof mount; requires radials.

### AV-14AVQ

10-40 m, 18 ft tall, 9 lbs, 1500 W PEP. Auto band switching. Ground or roof mount. Requires radials. Heavy duty bracket with recessed SO-239 mounts on 1.5-1.625" diameter mast. Optional MK-80, 80 m add-on kit, and AV-14RMQ roof mount kit. AV-12AVQ 13 ft 3-band version also available.

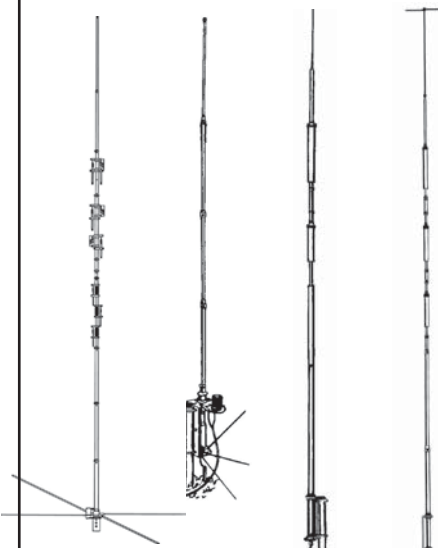

DX-77A / AV-18VS / AV-12AVQ / AV-14AVQ



## MFJ-1982 End Fed Horizontal Wire Antennas



End-fed radiators have the unique quality of resonating on the 1/2-wave fundamental frequency plus odd / even harmonics above! Broad-band matching transformer at feed point lets the entire HF spectrum be yours! SWR is so low you may never need a tuner.

Installation is fast for home, road, emergencies – just one high center or end support. Toss your EFHW over a high limb for an inverted-V, raise the far end high for a powerful sloper, or even go

vertical with an inverted-L. Comes with a rugged insulated-wire radiator that prevents detuning when in contact with limbs/branches. “No-sag” end insulator slides over branches and through foliage. Dark jacketed wire is virtually invisible. Don’t let antenna restrictions keep you off the air! Power ratings are in Watts PEP for SSB / CW modes, with 50% or less transmit time (ICAS).

MFJ-1982LP	\$49.95	30 W	QRP	80-10 Meters
MFJ-1984LP	\$39.95	30 W	QRP	40-10 Meters
MFJ-1982MP	\$69.95	300 W	Restricted space	80-10 Meters
MFJ-1984MP	\$59.95	300 W	Restricted space	40-10 Meters
MFJ-1982HP	\$89.95	800 W	High power	80-10 Meters
MFJ-1984HP	\$79.95	800 W	High power	40-10 Meters



## MFJ-1836 1/2-Wave, 6-Band HF

### Cobweb Antenna

Restricted space spoiling your operating fun? MFJ Cobweb puts your call back on the map! This six-band (20, 17, 15, 12, 10, 6 Meters) full half-wave Cobweb Antenna is perfect for restricted space or portable operation. Sky-gray fiberglass spreaders and nearly invisible wire elements (flat 9 x 9 x 1/2 feet square; 8 pounds) blend in with your surroundings while standing tough against nasty weather.

Outstanding performance! Horizontally polarized for less local noise pickup plus solid gain over verticals will allow you to work DX easily – even on QRP. Omni-directional. No radials needed! Works great at low heights. Low SWR is due to MFJ’s exclusive Spider-Match™ broadband network. Use lightweight TV hardware to mount on your chimney, balcony, mast. Low in cost, but big on performance.

**HRO Price MFJ-1836 \$229.95**

**HRO Price MFJ-1836H \$259.95** legal limit model.

**HRO Price MFJ-1836HK34, \$119.95** adds 30 / 40 meters.

## MFJ-1838 40-6 Meter Cobweb Super Heavy-Duty Antenna

The new, super heavy-duty 40-6 meter Cobweb Antenna, MFJ-1838, is built to survive harsh northern winters, heavy snow, ice and strong winds. It has super-strong large-diameter fiberglass and heavy-duty 14 gauge stranded hard copper wire. 8-bands: 40, 30, 20, 17, 15, 12, 10, 6 Meters, 1500 Watts. 12 feet, 23 lbs. **HRO Price \$399.95**



## MFJ-1846 MFJ-1848

### Hex Beam Antennas

1500 Watt HexBeam delivers solid gain and directivity on 20, 17, 15, 12, 10, and 6 Meters in a low-profile package that will have your pocket-book and your neighbors smiling!

The MFJ-1846 uses an updated G3TXQ element configuration for excellent gain, improved bandwidth, superior front-to-back ratio and low SWR -- makes snagging rare DX easy! That’s just the beginning! MFJ takes the HexBeam’s unique balanced-tension framework to a new level with rugged mounting hardware, exceptionally durable spreaders and sliding antenna-wire guides -- all designed to ensure years of reliable service in tough weather conditions. Gain and directivity makes the difference when DXing or maintaining schedules and the HexBeam delivers!

### MFJ-1846 Specifications:

- Gain: 5.3 dBi in free space (more over ground).
- Front-to-Back Ratio: 15 - 20 dB.
- Typical turning radius: 11 feet.
- Maximum mast size: 2-1/16" OD.
- Weight: 25 pounds.
- Wind loading surface: 3.5 square feet

**HRO Price MFJ-1846 \$479.95**

### MFJ-1848 Specifications:

- 8-Bands: 40, 30, 20, 17, 15, 12, 10, 6 Meters.
- 40 and 30 meters are each one-element radiators.
- 1500W.
- 14 foot turning radius.
- Weight 28 lbs.

**HRO Price MFJ-1848 \$649.95**



## MA-6B 2-Elements on 20, 17, 15, 12, 10, 6 Meters

Cushcraft’s latest MA-6B gives you 2-elements on six bands! You get solid signal-boosting directivity in a bantam-size and weight.

Mount on your roof or mast using standard TV hardware. It’s perfect for exploring exciting DX without the high cost and heavy

lifting of installing a large tower and full-sized array. Its 7-foot 3-inch boom has a turning radius less than 9 feet. Contest tough – handles 1500 Watts.

The unique MA-6B is a two-element Yagi on 20 / 17 / 15 / 12 / 10 / 6 meters. It delivers solid power-multiplying gain over a dipole on all bands. You get automatic band switching and a super easy installation in a compact 26-pound package. When working DX, what really matters are the interfering signals and noise you don’t hear. That’s where the MA-6B’s impressive side rejection and front-to-back ratio really shines. **HRO Price \$674.95**

**MA-5B** Like MA-6B but five bands: 20, 17, 15, 12, 10 meters. 12 and 17 meters is a single element trapped dipole **HRO Price \$499.95**

# HF / VHF VERTICAL BASE ANTENNAS



## Titan DX

The Titan is a center fed GAP vertical, that provides a host of benefits in a rugged, yet manageable form. The Titan offers broad, continuous frequency coverage in a no tune, easy to assemble format. Designed to work in a limited space or as the perfect compliment to an antenna farm. NO RADIALS required.

Total continuous coverage under 2:1 on 10m, 12m, 15m, 17m, 20m, 30m, 40m, and 100 kHz on 80m.

## Challenger

The Challenger is capable of operating on eight separate bands from 3.5 MHz to 144 MHz. Use it on 80, 40, 20, 15, 12, 10, 6 and 2 meter bands with over 130 kHz bandwidth on 80 m.

The antenna is designed to be mounted directly in the ground or elevated. A ground mount is provided. The Challenger may be roof mounted. The antenna requires a counter poise of three 25 foot insulated wires.

## GAP Antennas

Model	Bands	Bandwidth (under 2:1)	Height (ft)	Weight (lbs)	Mount	Counter poise	Ground Area Required	HRO Price*
Challenger	80,40,20, 15,12,10, 6,2m	Entire band except 130kHz 80m	31.5	18	Ground or elevated. Ground Mt supplied	3 at 25'	10' x 12'	CALL
Voyager DX	160,80,40 20m	Entire band except 900kHz 160m	45	30	Ground. Aluminum pivot and guy brackets supplied	3 at 57'	4 guy points 25 ft from base	CALL
Eagle DX	40,20,17, 15,12,10m	Entire band except 500 kHz 10m	21	11	Most anywhere. Pole mount supplied for 1.25 ant Mast	3 rigid at 80" long		CALL
Titan DX	80,40,30, 20,17,15, 12, 10m	Entire band except 100 kHz 80m	25	25	Most anywhere. Pole mount supplied for 1.25 ant Mast	4 rigid at 80" long		CALL

## Eagle DX

The Eagle DX weighs just 11 pounds and can be installed almost anywhere. It is essentially a set of vertical dipoles with no traps, coils or transformers.

It covers 40, 20, 17, 15 and 10 meters with the entire band at a VSWR of 2:1 or less. For 10 m this is 500 kHz. No antenna tuner is required.

## Voyager DX

The Voyager DX is manufactured specifically to provide efficient low band operation from the typical backyard without a huge investment in time, money, or space.

It is not another "add a kit" antenna for 160m. GAP technology opens up the low bands. Emphasis was given to 160 m and 80 m when designing the Voyager.

The antenna employs a capacity hat with circular ring to reduce the physical height to 45 feet while maintaining an electrical height of 66 feet.

Parallel tuner rods are used in its design. No tuning or matching are required to put the Voyager on the air.


## Ultra-Compact Vertical

# Maldol

### HVU-8

### 8 Bands on HF / 2m / 70 cm


HRO Price \$339.95

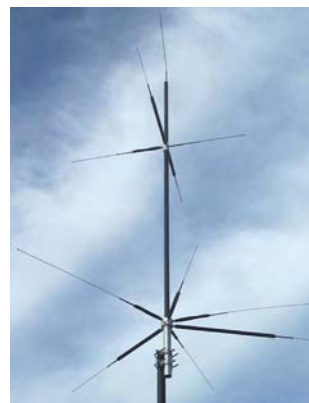

At only half the height and weight of traditional HF vertical antennas, model HVU-8 includes 2m and 70cm. It is easily configured and installed in confined or restricted spaces such as apartment balconies, or for temporary use. Each HF

band and 6m has an independently tuned radiator and radial system while the main antenna mast is tuned for constant operation on 2m / 70 cm.

- HF and 6m: 1/4 wave.
- 2m: 1/2 wave 2.15 dBi gain.
- 70cm: two 5/8 waves in phase, 5.5 dBi gain.
- Impedance: 50 Ohm.
- Max power HF: 200 W SSB; 6m-70 cm: 150 W FM.
- Height: 8 ft 6 inches.
- Weight: 5 lbs 7 ozs.

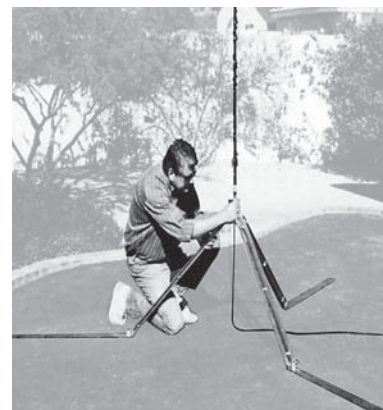

## Outpost™

### Tripod / Ground Coupler Ground Mount System

HRO Price \$275.95

- Matches the base impedance of most mobile HF antennas.
- Fold-over 3/8 x 24 SO-239 top mount.
- Constructed of aircraft 6061-T6 aluminum, stainless steel hardware and wing nuts.
- No digging—no holes in ground—no concrete.
- Fold-out legs act as a large capacitor providing proper coupling to the ground and proper base impedance to the antenna. Fold-up design for 10-minute installation.

\* All GAP antennas shipped PLUS freight



# HF LONG WIRE ANTENNAS

## RadioWavz

Product	Model	HRO Price
---------	-------	-----------

### Dipoles with 1:1 Balun

160 m	160DP11	\$74.95
80 m	80DP11	\$69.95
40 m	40DP11	\$54.95
20 m	20DP11	\$49.95
10 m	10DP11	\$37.95

### DX (OCF) Windom

DX 40	DX40	\$69.95
DX 80	DX80	\$89.95
DX 160	DX160	\$204.95

### G5RV Line

(w / heavy duty ladder line)

G5RV Jr.	\$59.95
G5RV Lite-E	\$99.95
G5RV-E	\$84.95
G5RV MAX-E	\$129.95



### Double Bazooka

160 m	160DBZ	\$119.95
80 m	80DBZ	\$89.95
75 m	75DBZ	\$84.95
60 m	60DBZ	\$74.95
40 m	40DBZ	\$69.95
20 m	20DBZ	\$46.95
17 m	17DBZ	\$44.95
15 m	15DBZ	\$39.95
10 m	10DBZ	\$44.95
6 m	6 DBZ	\$42.95
2 m	2DBZ	\$42.95

## The Owl




Want to keep those birds off your antenna system?

The OWL is just the trick. Mount this fella on top of your tower and the birds will stay away.

HRO Price \$19.95

## Hex Beams

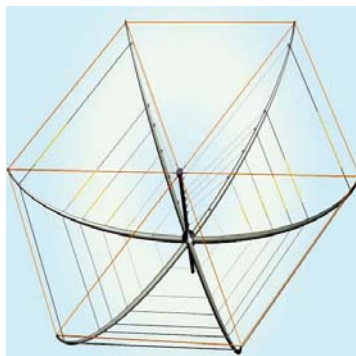

**Hex Beam**  
**Covers HF & 6 M**  
HRO Price – Call

### Sentinel Series Features

- Single coax feed (except for the Barrett and Broadband options).
- Low SWR.
- No tuning required, just plug and play.
- Improved broad band response over original hex beam design.
- Performs well at lower heights.
- Handles full legal limit of power.
- Small physical foot print.
- Light enough for a push up mast.
- Symmetrical shape withstands wind better.

### Sentinel Models

**Sentinel Barrett Series Hex Beam**  
160-10 m or 40-6 m.

**Sentinel Hex Beam 6 bands**  
10, 12, 15, 17, 20, and 40 m.

**Sentinel Hex Beam 10 m & 6 m**  
Dual band.

**Sentinel Hex Beam 4-band**  
Covers 20, 15, 10, and 6 m.

**Sentinel Hex Beam 20 m**  
Single band antenna.

**Sentinel Hex Beam 10 m**  
Single band antenna.

**Sentinel Hex Beam 6 m**  
Single band antenna.

Find updates @  
<http://www.hamradio.com>

## HF OCF Antennas

# BUCKMASTER

### HF Dipole Antennas

### Off-Center-Fed (OCF)



World-wide DX, multi-band, no tuner required.

**4-Band: 40, 20, 10, & 6 meters.**

68 feet (23+45) long.

**DX-OCF-40** 300W

**HRO Price \$214.95**

**DX-OCF-HP40** 3kW

**HRO Price \$324.95**

**7-Band: 75 / 80, 40, 20, 17, 12, 10, 6 meters.**

135 feet (45+90) long.

**DX-OCF** 300W

**HRO Price \$229.95**

**DX-OCF-HP** 3kW

**HRO Price \$329.95**

**8-Band: 160, 75/80, 40, 20, 17, 12, 10, 6 meters.**

270 feet (90+180) long.

**DX-OCF-160** 300W

**HRO Price \$299.95**

**DX-OCF-HP160** 3kW

**HRO Price \$389.95**


## Limited Space Antennas

# ALPHA DELTA

All of Alpha Delta's limited space antennas use stainless steel hardware where required, are fully assembled, and are manufactured to withstand severe weather. SO-239 connectors. The **DX-A** and **DX-B** slopers must be attached to a tower with an HF size beam on top to be a "capacity hat" for proper tuning. Power Rating: 1000 Watts CW/PEP.

**Model DX-B** is a single wire, high performance quarter-wave sloper antenna for 160, 80, 40 & 30 meters. For limited space, the antenna requires only 60 feet for installation. Use with a wide range antenna tuner. Pre-assembled and pre-tuned. Has stainless steel hardware, 12 gauge insulated solid copper wire and the Alpha Delta "ISO-RES" RF choke coils, 50 ohm coax feed. **HRO Price \$119.95**

**Model DX-A:** A quarter wave twin sloper for 160-80-40 meters. One leg is 67' and the other 55'. Installs as an inverted-V. **HRO Price \$99.95**

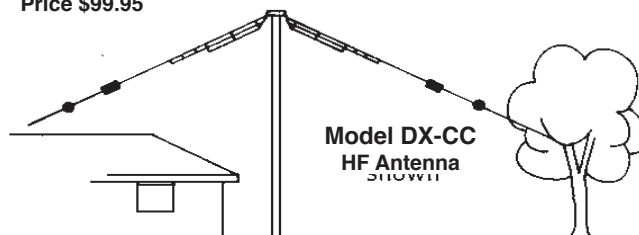

**Model DX-CC:** A no trap 80-40-20-15-10 meter dipole. 82' long. **HRO Price \$159.95**

**Model DX-DD:** A no trap 80-40 meter dipole. 82' long. **HRO Price \$139.95**

**Model DX-EE:** A no trap 40-20-15-10 meter dipole. Only 40' long. **HRO Price \$149.95**

## HF Antenna Whips

### MFJ-16XXT

HF antenna whips handle 250 Watts PEP. Whips are about 7 feet fully extended and collapse to about 4 feet for easy storage. Simply screws into any 3/8 x 24 female mount for quick band-changing.

Each whip is ruggedly constructed. Heavy duty 4-foot, 3/8" diameter fiberglass rods, nearly indestructible eighth-inch diameter PH-17-7 stainless steel whips, and chrome-plated brass fittings will give you years of service.

Sleek low-profile construction has low wind loading and the semi-rigid fiberglass eliminates the need for springs or guys. Black anti-static jacket protects the loading coil and blends with any vehicle. Stainless steel whips are adjustable for lowest SWR. Push the whips down to park in the garage or fully extend for maximum efficiency during mobile operation. Includes allen wrench and complete tuning and matching instructions.

MFJ-1675T - 75 M	MFJ-1617T - 17 M
MFJ-1660T - 60 M	MFJ-1615T - 15 M
MFJ-1640T - 40 M	MFJ-1612T - 12 M
MFJ-1630T - 30 M	MFJ-1610T - 10 M
MFJ-1620T - 20 M	MFJ-1606T - 6 M

## Telescopic Whips

### MFJ-197X

MFJ's premium stainless steel telescopic whips are the perfect choice for building collapsible multi-band dipoles, mobiles, portable and base antennas. They are handy for traveling, mini DXpeditions, vacations, etc. Use them to replace your current automatic screwdriver whip for a more highly efficient fixed mobile operation. Rigidly collared at the base, stronger than plated brass, and impervious to rust and corrosion, they stand up to the forces of nature and the rigors of portable operation where others might fail.

Model	Number Sections	Height Feet	Collapsed Inches
MFJ-1979	10	17	27
MFJ-1977	7	12	26
MFJ-1976	7	10	20
MFJ-1974	5	8	24
MFJ-1972	3	4.5	22

## Base Antennas

### 80 - 2 m

#### MFJ-1798

Ten band halfwave vertical antenna. Covers 10 bands: 75 / 80, 40, 30, 20, 17, 15, 12, 10, 6 and 2 meters. No ground radials or ground needed because of the effective counterpoise that is 12 feet across. Mount from ground level to roof top. The feedline is isolated from the antenna using MFJ's AirCore™ balun. Achieves full-sized performance with full-size radiators for 2-20 meters and high efficiency end-loading for 30, 40 and 75 / 80 meters. UPS Shippable.



### 40 - 6 m Vertical

#### MFJ-1796

6 band vertical covers 40 through 6 meters. 12 feet tall with tiny 24-inch footprint. Mounts anywhere, handles 1500 Watts PEP.

### 40 - 2 m Mini-dipole

#### MFJ-1775

1/2 Wave, 6-band rotatable mini-dipole. Just 14 feet wide, can be turned by a small TV-type rotator. Covers 40 through 2 meters, handles 1500 Watts.

## Longwire Antennas



### 80 - 10 m G5RV

#### MFJ-1778

All-band G5RV antenna. 102 feet long, 32.5 foot ladder line ending in SO-239 connector for coax feedline. 1500 Watts. 80-10 m, 160 meters with tuner/ ground.

### 40 - 10 m G5RV Junior

#### MFJ-1778M

G5RV Junior. Half-size, 52 feet. Covers 40-10 meters.

## On-Glass Dual Band

### MFJ-1734

Dual band glass mount 144 / 70 cm antenna gives 2.6 dB gain on 2 meters and 6.3 dB gain on 70 cm. Low SWR on both bands.

### MFJ-1738

2 meter glass-mount antenna handles 50 Watts with 2.6 dB gain, low SWR over entire 2 meter band.

## VHF / UHF Mobile

### MFJ-1724B

Mobile magnetic mount dual band antenna gives you a quarter wave stainless steel whip for 2 meters and 70 cm, coax, and connector. Low SWR, 200 Watts.



### MFJ-1729

Mobile Magnetic Mount super gain dual band antenna. Get a whopping 2.6 dB gain on 2 meters and 6.3 dB gain on 70 cm.

### MFJ-1432

Dual band, 62.5" RuffRider™ hyper gain mobile antenna. 7.6 dB gain on 70 cm, 5 dB gain on 2 m. Requires tri-magnet mount, not included.

## 2 m + 6 m Mobile

### MFJ-1728B

Mobile magnetic mount 5/8 wave 2 meter and 1/4 wave 6 meter antenna. Low SWR, 300 Watts.

## Hi-Q Loop Antennas

### MFJ-1786

Tiny 36" diameter loop antenna operates 10-30 MHz continuously - including WARC bands! Ideal for apartments, small lots, motor homes, attics, etc. Handles 150 watts. MFJ's included remote control has Auto Band Selection™. Auto tunes to desired band, then beeps to let you know. No control cable needed. Fast / slow tune buttons, built-in two range cross-needle SWR / Wattmeter. All welded construction, large 1.050" diameter round radiator gives you highest possible efficiency. Heavy duty ABS plastic housing has ultraviolet protection.



MFJ-1788 Like MFJ-1786, 40 - 15 Meters.



## Antennas for Handhelds

### PRYME®

Radio Products

**Dualband Rubber Duck**

**RD-8H**

144 MHz / 440 MHz, flexible 6.5" tall HT antenna, gold plated BNC connector.

**HRO Price \$14.95**

RD-8H

## Wireless Antennas



**Wi-Fi / 802.11b Wireless LAN Antennas**

NGC offers a wide selection of directional and omnidirectional antennas for Amateur Television, the ISM band, LAN / WAN, data links and wireless internet.

**GP-24R**

ATV/ISM band:

2400-2500 MHz.

Omnidirectional gain:

15.4 dBi.

Height: 5' 10".

Connector: N-Type.

**HRO Price: \$149.95**

**GP-24-3R**

Same as GP-24 but omnidirectional with 3 degree electrical downtilt.

**HRO Price: \$159.95**



## On-Glass 2 m



**Single Band 1/2-Wave**

Larsen's full selection of on-glass antennas for single-band and dual band use are described on page 97. All single band antennas are pre-cut. A single 1/2 wave design provides 2.4 dB gain.

**KG-144-UDPL 2 M HRO Price \$89.95**

*Find more on-glass antennas on page 107.*

## 2 m / 70 cm Mobiles



**Dual Band Antennas for 2m / 70 cm**

Model	MaxPwr	Gain	Lgth	Conn	Finish
EX-107RB	80 W	2.6 / 4.9	29"	PL-259	Black
EX-107RBNMO	80 W	2.6 / 4.9	29"	NMO	Black



**Dual Band Antenna for 2 m / 70 cm Model NMO 2 / 70 Black**

Band	Freq MHz	Gain	Weight oz	HRO Price
2 m	144-148	3.8 dBi	3.9	\$69.95
70 cm	440-450	5.2 dBi		

### Austin

**Dual-Band Mobile Antennas**

Model	Band	Freq MHz	Gain	Weight oz	HRO Price
500C	2 m	144-148	Unity	6	\$45.95
	70 cm	440-450			
Metropolitan	2 m	144-148	Unity	6	\$58.95
	1.25 m	220-225			
	70 cm	440-450			

*Find more dual-band antennas:*



**See Page 108**



**See Page 104**

## Duplexers

When using a single antenna with mobile radios that have separate 144 MHz and 440 MHz outputs, you must use a duplexer.

**Comet** has a wide variety of duplexers & triplexers with gold-plated connectors, high isolation and the highest power handling abilities. See page 107.

**Diamond** has a wide collection of duplexers and triplexers for coupling antennas and transceivers. See page 102.

## Tarheel Mobile Antennas



**< Little Tarheel II**  
**3.5 - 54 MHz**



**Baby Tarheel**  
**10 - 40 M**

**HRO Prices \$CALL**

When properly installed on your vehicle the Little Tarheel II will provide continuous coverage from 3.5 to 54 MHz with the supplied whip. Like all of our motorized antennas, this model meets the highest standards but in a smaller size.

It comes with sensors pre-installed so if you decide to add one of the auto controllers (SDC-100 Simple Controller, SDC-102 Programmable Controller, Turbo Tuner, and Tunematic) now or later, everything is ready.

This antenna is for the person who wants to enjoy HF mobile with a more compact antenna. Don't let the small size fool you. The Little Tarheel II mounts higher on the vehicle so you have less ground loss and higher performance. Because of its smaller size, this antenna offers the convenience of a more common type of mount like the Diamond K400 Series, the Comet Series, or similar 3/8" stud type mount.

The Little Tarheel II comes as a package. All you need is a mount and a nice HF radio. Included standard with the antenna is: the whip, 20 feet of plug and play control cable, manual control box, ferrite decoupling core and 3/8 x 24 stud.

The antenna is powder coated in standard colors of black, white, red or silver. It also comes with the tough Lexan™ Weather Shield like its big brothers. This model also uses the commercial 12 volt gear motor.

The antenna has a ONE YEAR NO MATTER WHAT WARRANTY to the original owner.

**Specifications:**

- Lower mast size: 1 1/2". Weight: 1.9 lbs.
- Lower mast length: 16".
- Whip length: 32".
- Total antenna length, 54 MHz position: 48".
- Total antenna length, 3.5 MHz position: 54".
- Continuous coverage: 3.5 - 54 MHz.
- Power rating: 200 Watts P.E.P.
- Typical SWR: 1.5 or less.

**HRO Price \$CALL**

**Check for Special Offers at hamradio.com**



## Low Noise 6-Meter Loop-Fed Arrays

Cushcraft's computer optimized third generation G0KSC Loop Fed Array (LFA) yagis are specifically designed for low noise – hear weak signals that others can't!

Highly suppressed side lobes eliminate unwanted noise and signal pickup from sides making your desired signal pop out!


See and hear for yourself how signals pop out from a low-noise G0KSC LFA as compared to a top performing yagi at [www.cushcraftamateur.com/LFA-6M5EL.php](http://www.cushcraftamateur.com/LFA-6M5EL.php)

Wide-spaced LFA yagis have lower SWR, higher gain, better front-to-back and are more broadbanded than dipole fed yagis.

Cushcraft's direct 50-Ohm feed has no lossy matching network that limits power handling. These LFAs handle 5,000 Watts. Your actual operational power is limited by your coax, connectors and other accessories.

Cushcraft LFAs are also computer optimized for maximum mechanical strength using exceptionally strong tooled parts to give you years of reliable service.

All Cushcraft 6-Meter LFAs have heavy duty 2-inch diameter double-walled booms, 5/8" fully insulated elements, and 7/16" outer tip sections. Climb the tower only once!

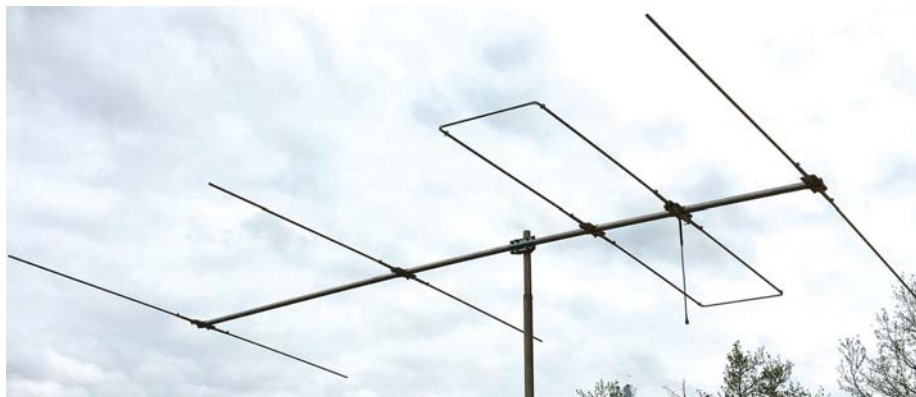


**LFA-6M 4EL, \$349<sup>95</sup>**



**LFA-6M 7EL, \$749<sup>95</sup>**



**LFA-6M 8EL, \$959<sup>95</sup>**

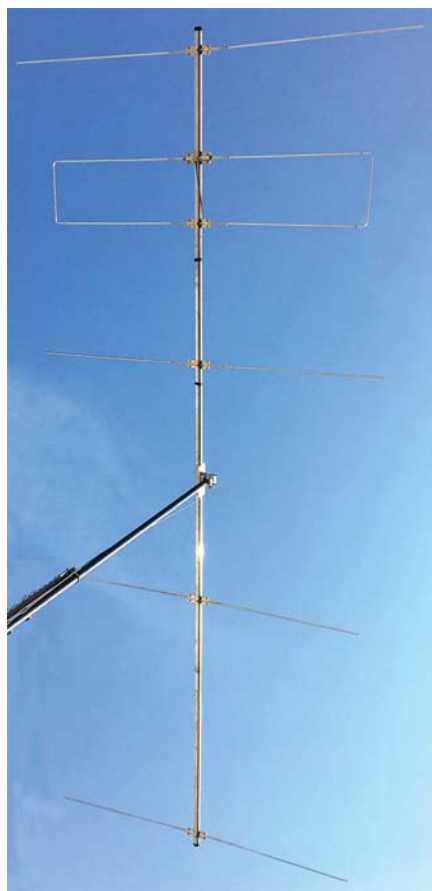

**LFA-6M 5EL, \$499<sup>95</sup>**

### 6-Meter Antenna Performance

Model#	LFA-6M4EL	LFA-6M5EL	LFA-6M7EL	LFA-6M8EL
<b>Gain</b>	10.7 dBi@50.15	11.88dBi@50.15	13.5 dBi@50.15	14.09dBi@50.15
<b>F/B</b>	35.24 dB@50.15	27.35 dB@50.15	23.8 dB@50.15	23.81 dB@50.15
<b>Peak Gain</b>	10.76 dBi	11.91 dBi	13.5 dBi	14.15 dBi
<b>Peak F/B</b>	44.78 dB	28.01 dB	26.23 dB	26.27 dB
<b>Power Rating</b>	5kW*	5kW*	5kW*	5kW*
<b>SWR</b>	< 1.5:1 50-50.4	<1.5:1 50-50.3	<1.5:1 50-50.4	<1.5:1 50-50.4
<b>Stack Distance</b>	17.6 feet	20 feet	24 feet	26.6 feet
	recommended	recommended	recommended	recommended
<b>2 Stacked Gain</b>	13.59@17.6 ft.	14.78 dBi	16.28 dBi	16.94 dBi
<b>2 Stacked F/B</b>	25.04 dB	36.02 dB	25.19 dB	25.80 dB
<b>Boom Length</b>	13 feet	21 feet	33.6 feet	42 feet
<b>Weight</b>	8 lbs.	17 lbs.	37 lbs.	39 lbs.
<b>Turning Radius</b>	6' 11"	11' 4"	17' 8"	21' 4"
<b>Wind Loading</b>	TBA	TBA	TBA	TBA
<b>Wind Survival</b>	120 MPH	118 MPH	108 MPH	100 MPH


\*Power handling is limited only by operating station accessories such as coax.

*See [www.cushcraftamateur.com](http://www.cushcraftamateur.com) for full specifications: SWR curves, patterns, gain, wind loading, wind survival, front-to-back, and more.*






## Low Noise 2-Meter Loop-Fed Arrays

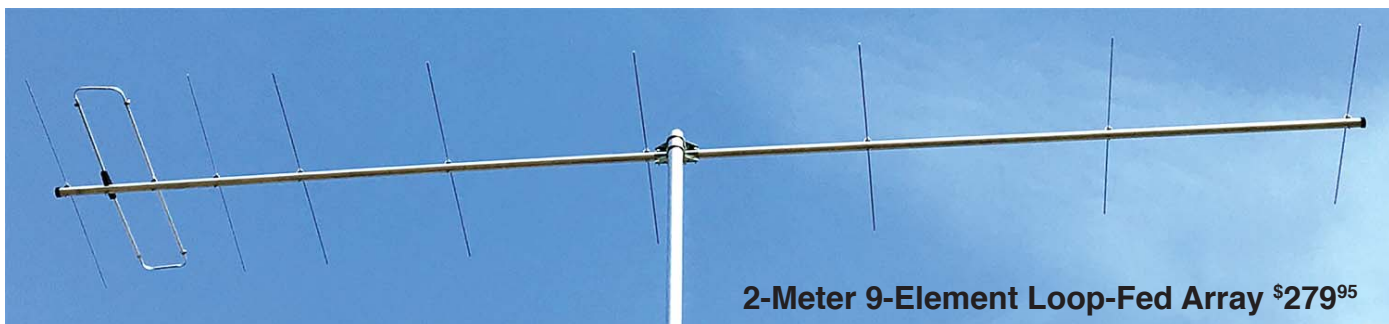

**2-Meter 9-Element Loop-Fed Array \$279<sup>95</sup>**



**2-Meter 12-Element Loop-Fed Array \$349<sup>95</sup>**

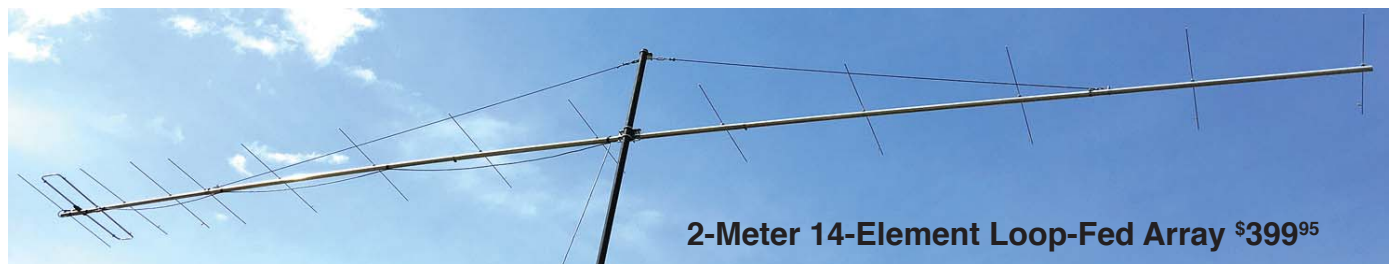

**2-Meter 14-Element Loop-Fed Array \$399<sup>95</sup>**

### 2-Meter Antenna Performance

Model #	LFA-2M 9#L	LFA-2M 12EL	LFA-2M 14EL	LFA-2M 16EL***
Gain @ 144.1 MHz	14.04 dBi	15.79 dBi	16.56 dBi	17.25 dBi
Gain @ 144.3 MHz	14.06 dBi	15.80 dBi	16.10 dBi	17.27 dBi
F/B @ 144.1 MHz	26.39 dB	30.52 dB	31.26 dB	33.47 dB
F/B @ 144.3 MHz	25.20 dB	28.73 dB	33.86 dB	37.53 dB
Peak Gain	14.09 dBi	15.82 dBi	16.64 dBi	17.3 dBi
Peak F/B	26.67 dB	30.53 dB	34.21 dB	38.02 dB
Power Rating	3 kW*	3 kW*	3 kW*	3 kW*
SWR	<1.1:1 148.600 to 145.200 MHz	<1.1:1 143.700 to 145.900 MHz	<1.1:1 143.900 to 144.800 MHz	<1.12:1 144.000 to 144.900 MHz
Boom Length	14.5 feet	23 feet	28 feet	35 feet
Weight	7.74 lbs	9.75 lbs	11.75 lbs	19.27 lbs
Turning Radius	7.36 feet	11.7 feet	14.06 feet	18.12 feet
Wind Loading	1.03 sq feet	1.64 sq feet	2.07 sq feet	2.5 sq feet
Wind Survival	173 MPH**	109 MPH**	83 MPH**	92 MPH**
Stack Distance Vertical	7-10 feet	7-10 feet	7-10 feet	7-10 feet
Stack Distance Horizontal	7-10 feet	7-10 feet	7-10 feet	7-10 feet
2 Stacked Vertical @ 144.3 MHz	16.97 dBi	18.56 dBi	19.39 dBi	20.18 dBi
2 Stacked Horizon @ 144.3 MHz	16.93 dBi	18.51 dBi	19.38 dBi	20.15 dBi
4 Stacked Vertical @ 144.3 MHz	20.06 dBi	21.74 dBi	22.06 dBi	23.18 dBi
Sky Temp @ 144.1 MHz	239.3 K	221.0 K	214.9 K	213.4 K
G/T Figure @ 144.1 MHz	-3.73 dB	-1.70 dB	-0.85 dB	-0.12 dB

**All our LFA's are  
SUPER LOW NOISE  
HEAVY DUTY  
Large diameter booms  
Rated to 5 kW+**

**2-Meter 16-Element Loop-Fed  
Array \$449<sup>95</sup>**



\*Power handling is limited only by operating station accessories such as coax.

\*\*Other options available if higher wind loading/survivability is required.

\*\*\*LFA-2M 16EL requires a 1:1 choke balun.




## A4S

4-element tri-band (10 / 15 / 20 m) beam on an 18 ft boom, handles full legal power limit. A true high-performance tribander with precisely tuned high power traps, carefully selected element lengths, and proper spacing. High gain, low SWR, and wide bandwidth makes this a premium antenna choice. **A744** adds on 30/40m.



## A3S

Classic 3-element tri-band (10 / 15 / 20 m) beam on a 14 ft boom, handles full legal power limit. Construction features included pinned boom sections, heavy duty element clamps with backing plates, and all stainless steel hardware. High power traps are still hand-made and individually tuned. A proven performer! **A743** adds 30 / 40m.

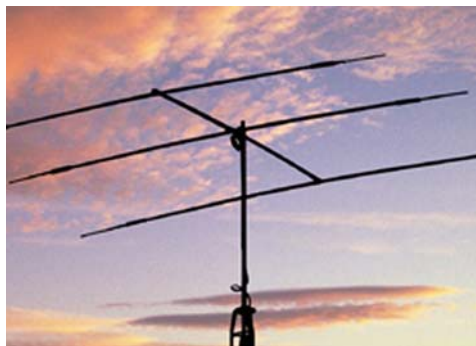

## A3WS

3-element 12 / 17 Meter beam on a 14 ft boom with all the same construction characteristics of the A3S. Add the optional **A103** for 30m.



## MA-5B

5-band beam in a compact 26 lb package! Automatic band switching, easy installation, handles 1500 Watts on a 7 ft 3 inch boom with less than 9 ft of turning radius. Impressive side rejection and front-to-back ratio makes this a great performing HF antenna.



## A270-6S

Increase the range of your dual-band base station with a dual-band yagi. Eliminate an extra feed line, and realize extra gain for your FM digital modes. Pre-tuned 3 elements per band. Assembles in a snap. **A270-10S** pre-tuned 5 elements per band for even better point-to-point communications.

**Call for Quotes  
on Cushcraft  
Antennas**

## R9

6-80 meter vertical requires no radials! 1500 W SSB / CW, no antenna tuner needed. Easy to assemble, low profile. Rugged construction. Thick fiberglass insulators, all stainless-steel hardware. 31.5 ft tall, 25 lbs. Mounts to 1.25 - 2 inch mast. 4 sq ft wind surface.



## R8

6-40 Meter Vertical requires no radials. Optional R-8TB tilt base and R-8GK three-point guy kit.



## RINGOS

**AR-2** (2 m) / **AR6** (6m) / **AR10** (10 m) Ringos have been around forever. These compact, FM verticals are broad banded, lightning protected, extremely rugged, economical, electrically bullet-proof, low-angle, and they work!





## Cushcraft HF Antennas

Model	Bands	Ele	Fwd Gain dBi	Max F/B dB	Min SWR	Boom Length		Boom Diameter		Longest Ele(Ht)		Turning Radius		Max Mast Dia		Wind Surf Area		Shipping Weight	
						FT	M	IN	CM	FT	M	FT	M	IN	CM	SQFT	SQMT	LBS	KG
MA-5B	10 12 15 17 20 meters	3	5.3 10m 1.0 12 m 4.8 15m 1.0 17m 3.6 20m	22	1.2:1	7.3	2.2	1.5	3.8	17.5	5.3	8.8	2.7	1 1/2	3.8	3.22	0.3	26.5	12
MA-5VA	10,12,15,17,20 m	1	1-2		1.2:1					14.7	4.48							6.5	2.95
MA-6VA	6, 10,12,15,17,20 m	1	1-2		1.2:1					14.7	4.48							6.5	2.95
R6000	20 - 10 + 6 meters	1	3		<1.2:1					19	8.7			1 3/4	4.4	1.5	0.14	12.5	5.6
R8	40 30 20 17 15 12 10 8m	1	3		<1.3:1					28	7.3							23	10.5
A3S	20 15 10 meters	3	8	25	<1.2:1	14	4.3	1.5	3.8	27.8	8.5	15.5	4.7	2	5.1	4.4	0.41	30	13.6
A743 Kit	40m for A3				<1.2:1					35	10.7	15.5	4.7	2	5.1	0.06	0.06	7	3.2
A3WS	17 12 meters	3	8	25	<1.2:1	14	4.3	1.5	3.8	25	7.6	14.4	4.4	2	5.1	4.1	0.38	26.5	12
A103 Kit	30m for A3WS				<1.2:1					32	9.8	14.4	4.4	2	5.1	0.04	0.04	6	2.7
A4S	20 15 10 meters	4	8.9	25	<1.2:1	18	5.5	2	5.1	32	9.8	18.4	5.6	2	5.1	5.5	0.51	38	17.2
A744 Kit	40m for A4S				<1.2:1					35	10.7	18.4	5.6	2	5.1	0.3	0.03	7.5	3.4
TEN-3	10 meters	3	8	25	<1.2:1	8	2.4	1.4	3.5	18	5.5	9.8	3	2	5.1	2	0.19	10.5	4.8
XM240	40 meters	2	6	25	1.1:1	22	6.7	2.5	6.3	43	13.1	24.3	7.4	2.5	6.35	5.5	0.51	59	26.8
D3	20 15 10 meters	1			<1.2:1					26	7.9	4	1.2	2	5.1	0.9	0.08	11	5
D3W	17 12 meters	1			<1.2:1					34	10.4	5	1.5	2	5.1	0.9	0.08	13	5.9
D4	40 20 15 10 meters	1			<1.2:1					36	11	5.5	1.7	2	5.1	1.3	0.12	15.5	7
D40	40 meters	1			<1.2:1					42	12.8	6.5	2	2	5.1	1.7	0.16	15	6.8
AR-10	10 meters	1	3		<1.2:1					17.6	5.4			1 1/4	3.2	1 2/3	0.16	5	2.3

*Due to rapidly increasing raw material and transportation costs, call for availability and pricing.*

## Cushcraft VHF / UHF Antennas

Model	Frequency Coverage	Ele	FWD Gain dBi	Max F/B dB	Conn	Polarization		Boom Length		Longest Ele(Ht)		Turning Radius		Max Mast Dia		Wind Surf Area		Shipping Weight		HRO Price
						HORZ	VERT	FT	M	FT	M	FT	M	IN	CM	SQFT	SQMT	LBS	KG	
A13B2	144-148	13	15.8	26	U	Y	Y	15	4.6	3.4	1	8.9	2.7	2	5.1	1.8	0.17	9.5	4.3	\$239.95
A17B2	144-145	17	18	26	N	Y	N	31	9.4	3.4	1	17.3	5.3	2	5.1	3.9	0.36	18	8.2	\$349.95
224WB	222-225	4	10.2	24	U	Y	Y	3	0.09	2.2	0.7	3	0.9	2	5.1	0.23	0.02	2.5	1.1	\$99.95
A50-3S	50-54	3	8	20	U	Y	N	6	1.8	9.8	3	6	1.8	2	5.1	1.8	0.17	8.5	3.9	\$139.95
A50-5S	50-54	5	10.5	24	U	Y	N	12	3.7	9.8	3	7.5	2.3	2	5.1	2.7	0.25	13	5.9	\$189.95
A50-6S	50-54	6	11.6	26	U	Y	N	20	6.1	9.8	3	11	3.4	2	5.1	4.5	0.42	22	10	\$389.95
A148-3S	144-148	3	7.8	25	U	Y	Y	2.8	0.9	3.3	1	2.8	0.9	2	5.1	0.27	0.03	3	1.4	\$66.95
A148-10S	144-148	10	13.2	24	U	Y	Y	12	3.7	3.3	1	6	1.8	2	5.1	1.2	0.11	6	2.7	\$129.95
A148-20T	144-148	20	13	20	U	Y	Y	10.8	3.3	3.3	1	6.8	2.1	1.5	3.8	1.4	0.13	7.5	3.4	\$204.95
A449-6S	440-450	6	10.5	18	U	Y	Y	2.9	0.09	1.1	0.3	2.9	0.9	2	5.1	0.3	0.03	2.5	1.1	\$72.95
A430-11S	430-440	11		20	U	Y	Y	4.2	1.3	1.1	0.3	2.8	0.9	2	5.1	0.39	0.04	3.5	1.6	\$99.95
A449-11S	440-450	11	13.2	20	U	Y	Y	4.2	1.3	1.1	0.3	2.8	0.9	2	5.1	0.39	0.04	3.5	1.6	\$109.95
AR270	144-148	1	3		U		Y			3.75	1.13			2	5.1	0.27	0.03	2	0.9	\$129.95
	430-450	1	5.5		U		Y													
AR270B	144-148	1	5.5		U		Y			7.7	2.3			2	5.1	0.47	0.044	2.4	1.09	\$179.95
	430-450	1	7.5		U		Y													
A270-6S	144-148	3	7.8	20	U	Y	Y	2.8	0.09	3.4	1	2.8	0.9	2	5.1	0.3	0.03	3.5	1.6	\$119.95
	430-450	3	7.8	18	U															
A270-10S	144-148	5	10	20	U	Y	Y	6.2	1.9	3.4	1	6.2	1.9	2	5.1	0.73	0.07	5	2.3	\$159.95
	440-450	5	10	18	U															
A6270-13S	6m,2m,70cm	5	8 6m 10 2m 10 70cm	20	U	Y	Y	8.8	2.56	9.7	3	6.16	1.87	2	5.1	2.52	0.23	9.5	4.3	\$279.95
AR-6	50-54		3		U	N	Y			10.1	3.1			1.25	3.2	0.37	0.03	4	1.8	\$99.95
AR-2	135-160		3		U	N	Y			3.9	1.2			1.25	3.2	0.21	0.02	2	0.9	\$64.95
AR-450	440-460		3		U	N	Y			1.4	0.42			0.75	0.88	0.1	0.01	2	0.8	\$47.95
ARX-2	137-160				U	N	Y			9.3	2.8			1.25	3.2	0.33	0.03	2.5	1.1	\$79.95
ARX-2B	134-164		7		U	N	Y			14	4.3			1.25	3.2	0.5	0.05	3.5	1.6	\$99.95
ARX-220B	220-225		7		U	N	Y			9.3	2.8			1.25	3.2	0.3	0.03	3	1.4	\$109.95
ARX-450B	435-450		7		U	N	Y			5	1.5			1	1.5	0.2	0.02	2	0.9	\$99.95



Hustler delivers reliability and performance Beyond Your Expectations!

## VHF / UHF Base Antennas

### 2m Verticals

These easy-to-assemble verticals are made of aluminum and high-strength fiberglass. When disassembled the longest part is about 4'. Choose 3, 6, or 7 dB gain and the overall length that best suits your application.

G7-144

**G7-144**

- Frequency range: 144-148 MHz.
- Bandwidth: 4 MHz.
- Gain: 7 dB.

**G6-144B**

G3-144

- Frequency range: 143-149 MHz.
- Bandwidth: 6 MHz.
- Gain: 6 dB.

**G3-144**

- Freq. Range: 144-148 MHz
- Bandwidth: 4 MHz.
- Gain: 3dB.

### 220 & 440 Verticals

**G7-220**

The G7-220 is of similar design and construction as the G7-144.

- Freq. Range: 220-225 MHz.
- Bandwidth: 5 MHz.
- Construction: High strength fiberglass and aluminum.
- Gain: 7 dB.

**G6-440**

G7-220

The G6-440 is of similar design and construction as the G6-270R.

- Frequency range: 440-450 MHz.
- Bandwidth: 10 MHz.
- Construction: One piece radome.
- Gain: 6 dB.

### Repeater Antennas

#### The Spirit Series

Hustler's omnidirectional, collinear design base station antennas are enclosed in a rugged fiberglass radome that will help minimize pattern variations due to high winds or extreme conditions. Models are available for 144, 220, 440, 900 MHz, and 1.2 GHz. The gain will be unity, 3, 6, 9, or 12 dB depending on the frequency.

Call HRO for quotes on custom frequencies.

### 2m / 70 cm Dual Band

**G6-270R**  
Dual band  
2 m / 70 cm

The G6-270R is a combination G6-144B and G6-440. It is factory tuned for quick and easy installation.

- Frequency range: 144-148 MHz / 435-445 MHz.
- Gain: 6 dB.
- Bandwidth: 4 MHz – 2 m / 10 MHz – 70 cm.
- One piece radome.
- VSWR: < 1.5:1 @ resonance.

## HF Base Antennas

### HF Multi-band

**6-BTV**  
10, 15, 20, 30, 40, 75 / 80 m

**5-BTV**  
10, 15, 20, 40, 75 / 80 m

**4-BTV**  
10, 15, 20, 40 m

- Broadbanded, low VSWR at band edges.
- Power capability – full legal limit on SSB or CW.
- Solid one-inch fiberglass trap forms for optimum electrical and mechanical stability.
- Heavy wall, high strength aluminum tubing, heavy duty aluminum mounting bracket and low loss, high strength insulators.
- Stainless steel clamps and hardware.
- Easy assembly and tuning.
- Single line feed with any length of 50 ohm coax used as ground mount with or without radials, or elevated mount with radials.
- All the BTV's can be mounted in a piece of PVC and disguised as a flagpole in deed restricted neighborhoods.



5-BTV


**Model 30-MTK**

30 meter add on kit for the 4 and 5-BTV

# BASE ANTENNAS

## HF Resonators

Customize your HF mobile system with Hustler products. Resonators may be used separately on one of the masts or up to three at a time with the VP-1. Add the QD-2, springs and mounts as needed for your installation.

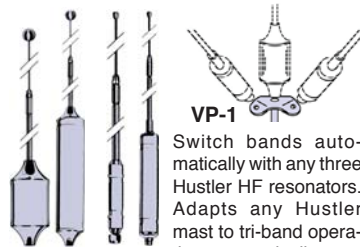

VP-1

Switch bands automatically with any three Hustler HF resonators. Adapts any Hustler mast to tri-band operation automatically.

## Hustler HF Resonators

Model	Type	Band	Power SSB	Bandwidth 2:1 SWR	Weight lbs
RM-10	Standard	10 m	400 W	150-250 KHz	0.41
RM-11	Standard	11 m	400 W	150-250 KHz	0.41
RM-12	Standard	12 m	400 W	90-120 KHz	0.41
RM-15	Standard	15 m	400 W	100-150 KHz	0.42
RM-17	Standard	17 m	400 W	120-150 KHz	0.44
RM-20	Standard	20 m	400 W	80-100 KHz	0.46
RM-30	Standard	30 m	400 W	50-60 KHz	0.84
RM-40	Standard	40 m	400 W	40-50 KHz	0.84
RM-60	Standard	60 m	400 W		
RM-75	Standard	75 m	400 W	25-30 KHz	1.05
RM-80	Standard	80 m	400 W	25-30 KHz	1.05
RM-10-S	Super	10 m	1 kW	250-400 KHz	1
RM-15-S	Super	15 m	1 kW	150-200 KHz	1.2
RM-20-S	Super	20 m	1 kW	100-150 KHz	1.25
RM-40-S	Super	40 m	1 kW	50-80 KHz	1.8
RM-75-S	Super	75 m	1 kW	50-60 KHz	2.1
RM-80-S	Super	80 m	1 kW	50-60 KHz	2.1

## Hustler Base Antennas

Model	Band	Gain	Connector	Height ft(m)
G7-144	2 m	7 dB	N Female	16.3 (4.6)
G6-144B	2 m	6 dB	SO-239	9.8 (2.9)
G3-144	2 m	3 dB	SO-239	7.5 (2.3)
G7-220	1.25 m	7 dB	N Female	10.2 (3.0)
G6-440	70 cm	6 dB	N Female	7.3 (2.2)
G6-270R	2 m / 70 cm	6 dB	N Female	7.6 (2.3)
6-BTV	10-30-80 m			24.0 (7.2)
5-BTV	10 to 80 m			25.0 (7.5)
4-BTV	10-40 m			21.4 (8.4)

## Hustler VHF / UHF Mobile Antennas

Model	Band	Gain	Power	Mount
LMC-270	2 m/70 cm	2.4/4	100	NMO
MX-270	2 m/70 cm	2.4/4	100	Mag
LMG-144	2 m	3.4	200	NMO
BBG-144	2 m	3.4	200	NMO
BBG-440-5	70 cm	5	200	NMO
BBGT-144	2 m	3.4	200	Trunk
MX-220	1.25 m	3.4	200	Mag
MX-2B	2 m	3.4	200	Mag
MX-440B	70 cm	3.4	200	Mag
SF-2	2 m	3.4	100	3/8X24
SF-220	1.25 m	3.4	100	3/8X24
RX-2	2 m	3.4	100	Mag
RX-220	1.25 m	3.4	100	Mag
RX-440	70 cm	5	100	Mag
CG-144	2 m	5.2	200	3/8X24
CG-220	1.25 m	5.2	200	3/8X24
CGT-144	2 m	5.2	200	Trunk
CGT-220	1.25 m	5.2	200	Trunk
THF	140-500	Unity	200	Trunk
UGM	140-500	Unity	25	Mag



# MOBILE ANTENNAS / MOUNTS

## VHF / UHF Mobile Antennas

### Dual Band

Dual band models for 144 / 440 MHz give you 2.4 dB / 4 dB gain. The antennas are rated at 100 Watts.

#### LMC-270

- NMO style coil
- Chrome top
- Coil and whip only



#### MX-270

- Chrome top.
- NMO style magnetic mount.
- 17 ft RG58/U coax.
- PL-259 connector.

### Magnetic Mounts

Models for 144, 220 and 440 MHz are power rated for 200 Watts. Each has an NMO-style coil and a magnetic mount.

**MX-2** 144 MHz 3.4 dB gain

**MX-220** 220 MHz 3.4 dB gain

**MX-440** 440 MHz 3.4 dB gain

- Chrome top.
- 10 oz magnet.
- 17 ft RG58/U coax.
- PL-259 connector.



**MX-2B** 144 MHz 3.4 dB

**MX-440B** 440 MHz 3.4 dB

- Same as above but all black coil.

### Collinear

Collinear models for 144 MHz and 220 MHz provide 5.2 dB gain. They are power rated for 200 Watts. All have a swivel ball for vertical positioning.

**CG-144** 6 MHz bandwidth

**CG-220** 4 MHz bandwidth

- 3/8"x24 thread
- 5/8 over 1/4wave.

**CGT-144** 6 MHz bandwidth

**CGT-220** 4 MHz bandwidth

- Trunk mount base.
- 17 ft RG58/U coax.
- PL-259 connector.



### Unity Gain

An antenna to custom trim as needed for VHF or UHF frequencies. Covers 140-500 MHz.

#### THF

Trunk Lip Mount

THF

#### UGM

Magnet Mount



### Coil and Whip

Models for 144 or 440 MHz are power rated for 200 Watts. NMO-style coil on each requires an NMO mount.

**LMG-144** 3.4 dB gain

- Chrome top and bottom.
- Contact- silver plated push pin.

LMG

**BBG-144** 3.4 dB gain

**BBG-440-5** 5.0 dB gain

- Chrome top, swivel ball and spring.

**BBGT-144** 3.4 dB gain

- Includes trunk mount.
- 17 ft RG58/U coax.
- PL-259 connector.

BBG

SF-2

### 5/8 Wave

Base-loaded 5/8 wave models for 144 MHz, 220 MHz and 440 MHz are power rated for 100 Watts.

**SF-2** 144 MHz 3.4 dB gain

**SF-220** 220 MHz 3.4 dB gain

- 3/8" x 24 thread.
- Mount to any Hustler mount.



RX-2

**RX-2** 144 MHz 3.4 dB gain

**RX-220** 220 MHz 3.4 dB gain

**RX-440** 440 MHz 5.0 dB gain

- 3 oz magnetic mount.
- 15 ft RG-58/U coax.
- PL-259 connector.



## Accessories



### MKR-2 Radial Kit

Used to convert RX Series, SF Series, & CG Series to fixed station operation. Contains three radials. Mount can accept any 3/8 x 24 threaded mount.



### QD-2 Quick Disconnect

Remove antennas easily with a push and twist release. Compression design of 100% stainless steel. 3/8 x 24 threads.

## Mobile Mounts

• **BM-1** Bumper mount with stainless steel strap and 1" diameter ball with 3/8 x 24 threads.



• **MBM** Powerful 5" diameter magnet with 3/8 x 24 threads. 16' of RG58U coax with PL-259 connector.

MBM

• **SSM-1** Heavy duty ball mount with 4" stainless steel spring with copper braided center conductor to prevent detuning. 180 degree adjustable 2" diameter stainless steel ball. Accepts 3/8 x 24 antennas.



SSM-1

• **SSM-2** Heavy duty 2" diameter stainless steel ball mount. 180 degree adjustable. Accepts 3/8 x 24 antennas.

• **SSM-3** Heavy duty stainless steel 4" spring with 3/8 x 24 coupling stud. Copper braided center conductor to prevent detuning.

• **C-32** Chrome plated 1" ball mount. Accepts 3/8 x 24 antennas.



C-32

• **C-29** Stainless steel 4" spring. Copper braided center conductor to prevent detuning. Accepts 3/8 x 24 antennas.


• **C-30** Chrome plated 4" spring. Copper braided center conductor to prevent detuning.



C-30

• **RSS-2** Stainless steel 3" spring. Used for mobile antennas between resonator and mast. Copper braided center conductor to prevent detuning. Accepts 3/8 x 24 antennas.

• **HLM** Trunk lip mount designed for hatch and slanted back vehicles. 180 degree 1" diameter ball, which accepts 3/8 x 24 antennas. RG58U coax with PL-259 connector.



• **HOT** Trunk lip mount with easy off/on with thumb knob. 180 degree 1" diameter ball, which accepts 3/8 x 24 antennas. RG58U coax with PL-259 connector.



• **TLM** Trunk lip mount which accepts 3/8 x 24 antennas. RG58U coax with PL-259 connector.



• **RVM** Recreational vehicle mount with heavy duty bracket. Easy antenna removal or lay down with thumb knob. 1" ball accepts 3/8 x 24 antennas. RG58U coax with PL-259 connector.




All mounts below are supplied with 17" RG-58U cable.



CHMB



CMMA



CTMA

Model	Description
CHMA	3/8" Hole mount without connector
CHMA-B	3/8" Hole mount w/crimp-on BNC
CHMA-P	3/8" Hole mount w/crimp-on PL-259
CHMB	3/4" Hole mount without connector
CHMB-B	3/4" Hole mount w/crimp-on BNC
CHMB-P	3/4" Hole mount w/crimp-on PL-259
CMMA	NMO 10 oz mag w/solder-on PL-259
CTMA	Trunk mount without connector
CTMA-P	Trunk mount w/crimp-on mini UHF

## Mobile Masts


### Fold-Over Masts

#### MO-1

Mobile mast 54" high for bumper, fender or hitch mounting. Folds over at 15" above base. 3/8 x 24 threaded.

#### MO-2

Mobile mast 54" high for bumper, fender or hitch mounting. Folds over at 27" above base. 3/8 x 24 threaded.



### Solid Masts

#### MO-3

Mobile mast 54" high for bumper, fender or hitch mounting. Solid aluminum with white vinyl coating. 3/8 x 24 threaded.

#### MO-4

Mobile mast 22" high for trunk or deck mounting. Three retuning tip rods included. 3/8 x 24 threaded.



## Portable HF Antenna



**CHA  
EMCOMM II**  
HRO Price \$114.95

This antenna for backup emergency HF system or permanent installation has an integral broadband impedance matching network (transformer 5:1) allowing broadband antenna tuning. It is the perfect backup antenna for apartments, condominiums, homeowners associations, deed restrictions, and CCRs (Covenants, Conditions and Restrictions), ARES, RACES, MARS, EMCOMM, NVIS, first responders, and especially for emergency preparedness.

The unit is totally waterproof. The antenna is 60' long and covers 6 m to 160 m. An external tuner is required. It weighs 1 pound and has an SO-239 RF connection.

The antenna will perform very well as a sloper or an inverted "V" configuration. For a NVIS configuration (40 m – 80 m) the antenna must be installed horizontally with the ground and elevated between 9' and 12' high. It does not require any ground-plane but will perform better with one. A ground terminal is available for that purpose.

## HF Whip Antenna



**SG-303**  
**Up to 500 Watts**  
HRO Price \$CALL

SGC's 9-foot helically wound whip antenna comes in two sections and provides full HF coverage when used with a Smarttuner or other antenna coupler. Covers 1.8-30 MHz, up to 500 W. Available with SGC's mobile swivel ratchet mount, Cat. # 55-75.

**Free UPS Brown Shipping  
in the Continental U.S.  
on Most Orders Over \$100.**



## HF Dipole Antenna YA-30

This 83-foot broadband dipole provides optimum performance over 1.8-30 MHz. Usual requirements for an antenna tuner between the rig and antenna are eliminated by the unique broadband design. Handles 150 Watts at an SWR of less than 1.9:1 on the amateur bands. Preassembled and pretuned. Can be installed as a horizontal flat-top, inverted-V, or sloper. 100 feet of RG-8X with PL-259 included. **HRO Price CALL**

## HF / VHF / UHF Mobile Antenna ATAS-120A >

The ATAS-120A provides HF / VHF / UHF coverage with automatic motorized tuning. Control radiator length from the transceiver for best SWR. Compatible with Yaesu's FT-100, FT-847, FT-857, and FT-897. **HRO Price CALL**

## HF / VHF / UHF Portable Field Antenna ATAS-25

The ATAS-25 has radiating elements covering amateur bands 10-40 m, 6 m, 2 m, and 70 cm. Mounts to a standard camera tripod (not included). Uses a manual tuning system. Dual frequency operation possible with a duplexer (not included). Antenna collapses to less than two feet to carry; expands to 7.2 foot maximum height. This is an ideal system to use with the FT-817, FT-897, and FT-857 transceivers. Weight is 2.05 pounds. **HRO Price CALL**




## HV7A Mobile Antenna System For New HF / VHF Transceivers (such as: IC706, IC7000, FT100, FT857, FT897 and the FT8900R)

The HV7A has 5 band capability: 70 cm, 2 m, 6 m and 2 HF bands through use of loading coils. Fold-over feature allows for easy access into low overhead buildings.

Bands Supplied: 10 m / 6 m / 2 m / 70 cm  
Opt. Loading Coils: 40 m / 20 m / 17 m / 15 m  
Power, P.E.P.: HF 120 W / VHF 200 W  
Mount Connection: UHF  
Length: 54" (HV7A)  
SWR: 1.5:1 nominal

**HV7A Price: \$109.95**

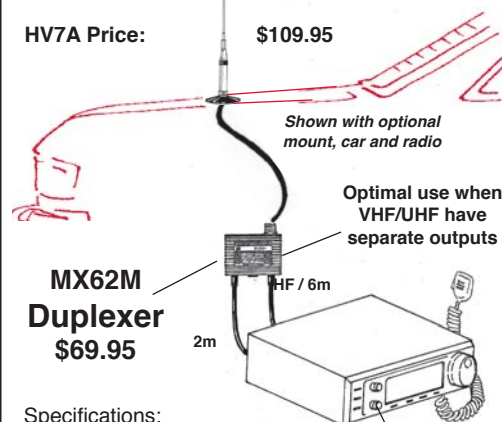

**MX62M  
Duplexer  
\$69.95**

Specifications:

- HF / 6 m, 2 m, 70 cm duplexer.
- 1.6–56 MHz LPF
- 76–470 MHz HPF
- (76-120 receive only)
- Watts: 600 P.E.P.
- Loss: .2 dB LPF  
.3 dB HPF
- Isolation: 50 dB


Optimal use when  
VHF/UHF have  
separate outputs

Use with HF / VHF  
mobile transceivers  
such as the IC-706  
series, FT-100 or  
combine 2 m and  
HF rigs.

## Optional Loading Coils

HVC14	20 m	\$37.95
HVC18	17 m	\$37.95
HVC21	15 m	\$37.95

## Antennas for Handhelds

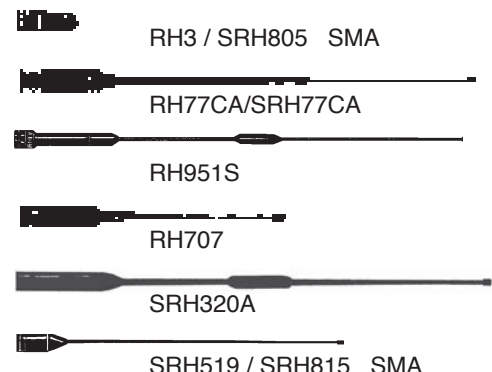




## The Standard by Which All Others are Judged

### Diamond Base Antennas

All base antennas grounded for lightning protection. Factory adjusted for American amateur bands; no tuning required.

- Wide-band performance
- Highest gain
- Fiberglass radome
- Factory adjusted
- DC grounded
- UPS shippable
- High wind rating
- Stainless hardware

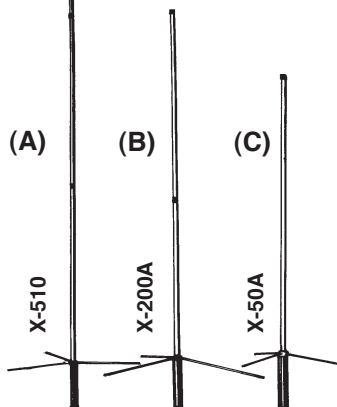

1. 52-54 MHz only. DPGH62 is adjustable from 50-54 MHz.
2. 15-148 MHz, 100 Watts on 2 m, 200 Watts on 1-1/4 m & 70 cm.
3. 28/50 MHz 400 W PEP, 14/21 MHz 400 W PEP, 7 MHz 200 W PEP.

Model	Bands	Gain, dB	Watts	Con. Type	WT (lbs)	Lth (ft)	MPH (no ice)	Fig	HRO Price
A502HB	6m Yag 2 elem.	6.3 dBi	400PEP	UHF	3.75	2.6			\$89.95
A144S5	2 m Yagi 5 elem.	6.0 dBi	100PEP	UHF	1.4	3.1			\$59.95
A430S10	70cm Yagi 10 elem.	13 dBi	100PEP	UHF	1.4	3.6			\$69.95
A430S15	70cm Yagi 15 elem.	14.8 dBi	100PEP	UHF	2.15	7.4			\$89.95
CP-22E	2 m	6.5	200	UHF	3	9	90	B	\$54.95
CP-5HS <sup>3</sup>	40/20/15/10/6 m		200v	UHF	6.6	11.75	80		\$379.95
CP-62	6m	5.5 dBi	200	UHF	9	22	80		\$199.95
CP-610	10m/6m	5.5/3.4 dBi	200	UHF	9	22	80		\$229.95
F-22A	2 m	6.7	200	UHF	5	10.5	112	B	\$94.95
F-23H	144-174 tunable	7.8	350	UHF	5	15	90	A	\$149.95
F-718	70 cm	11.5	250	N	5	15	90	A	\$199.95
MG-200	2.4 GHz	11		N	3	6	135	C	\$59.95
V2000A <sup>1</sup>	6m / 2m / 70cm	2.1 / 6.2 / 8.4	150	UHF	4	8.3	110	B	\$159.95
X-30A	2 m / 70 cm	3.0 / 5.5	150	UHF	2	4.5	135		\$69.95
X-50A	2 m / 70 cm	4.5 / 7.2	200	UHF	3	5.6	135	C	\$94.95
X-50NA	2 m / 70 cm	4.5 / 7.2	200	N	3	5.6	135	C	\$94.95
X-200A	2 m / 70 cm	6.0 / 8.0	200	UHF	4	8.3	112	B	\$124.95
X-300A	2 m / 70 cm	6.5 / 9.0	200	UHF	4	10	112		\$139.95
X-300NA	2 m / 70 cm	6.5 / 9.0	200	N	4	10	112	B	\$139.95
X-510HDM	2 m / 70 cm	8.3 / 11.7	330/250	UHF	5	17.2	90	A	\$179.95
X-510HDN	2 m / 70 cm	8.3 / 11.7	330/250	N	5	17.2	90	A	\$179.95
X-510NJ	144/430	8.3 / 11.7	200	N	5	17.2	90	A	\$199.95
X-3200A <sup>2</sup>	2m/1-1/4m/70cm	6.0 / 7.8 / 8.0	100@	UHF	4	10	112	B	\$179.95
X-6000A	2m / 70 / 23cm	6.5 / 9.0 / 10.0	100	N	5	10	112	B	\$169.95
BB7V	2-30 MHz		250	UHF	6	5/22	80		\$369.95
CP6AR	75/40/15/10/6 m		200	UHF	9.9	15.1	80		\$419.95

### Diamond Handheld and Receiving Antennas

Model	Description	HRO Price
D-130J	Wideband discone 25-1500 MHz. 20 W transmit 50-1300MHz. 100 W 144-3000 MHz No cable.	\$94.95
D-130NJ	Wideband discone 25-1500 MHz. 20 W transmit 50-1300 MHz. 100 W 144-1300 MHz, No cable, Type-N	\$95.95
D-3000N	Wideband discone RX 25-3000MHz, TX 50-1300MHz 20 W 50 MHz, 20 W transmit 50 MHz. 100 W 144-1300 MHz, 67" tall, Type N	\$129.95
RH-3	2m / 70cm dual-band HT antenna. 1.75" BNC. 120-900 MHz receive.	\$26.95
RH-77CA	High gain 2m / 70cm dual-band HT antenna. Receive range to 900 MHz. BNC.	\$22.95
RHF-10	144/440. Air Band 6W, Rec Only 150/300/450/800/900MHz, BNC	\$21.95
RHF-40	Super flexible version of Model RH-77CA	\$27.95
SRHF-40	Super flexible 15" tail SMA 144 / 440MHz HT antenna	\$26.95
RH-205	2m HT antenna, telescopic, 5/8 fully extended, 47.5"; 1/4 retracted, 9".	\$26.95
RH-519	2m / 70cm slim dual-band HT antenna. Flexible. 8" BNC, 10 watts.	\$24.95
RH-707	2m / 70cm dual-band, tiltable whip HT antenna. 8-1/4" BNC.	\$29.95
RH-951S	High gain 2m / 70 cm / 23 cm slim tri-band HT antenna. Flexible. BNC (Wide band receive)	\$44.95
SRHF10	Ht Antenna, 144/440MHz. Air Band 6W, SMA, Rec Only 150/300/450/800/900MHz	\$21.95
SRJF-10	144/440 MHz, Air Band 150/300/450/800/900 MHz(Rec. Only), 2.75", 6W, SMA(F) 1/4 wave length	\$21.95
SRH-519	2m / 70cm slim dual-band HT antenna. Flexible. 8" SMA, 10 watts.	\$26.95
SRH-77CA	High gain 2m/70cm dual-band flexible HT antenna, SMA	\$22.95
SRJ-77CA	Same as SRH-77CA for Wouxun, SMA	\$24.95
SRH-229	For Alinco DJ-G29T. High gain, flexible whip, 13", 220-900 MHz, 10W, 4dB, SMA	\$32.95
SRH-320A	2m/1-1/4m/70cm tri-band HT antenna. Flexible. SMA. 10 watts	\$46.95
SRH-789	Telescoping handheld antenna 95-1100 MHz, 6 sections, folds at base	\$32.95
RH-789	Same as SRH-789 but BNC connector	\$32.95
SRH-805	2m / 70cm / 23cm tri-band HT antenna. 1.75" SMA, 10 watts.	\$26.95
SRH-815	2m / 70cm / 23cm tri-band HT antenna. Flexible. 6" SMA, 6 watts.	\$31.95
SRH-940	6m /2m /440 MHz SMA HT antenna	\$39.95
SRH-999	6m /2m / 70cm / 23cm quad-band HT antenna. Flexible. 21 1/4" SMA, 10 watts.	\$54.95

### Specialty Antennas

#### High Power 2 m / 70 cm Mobile

Dual-band mobile antenna. 300 Watts (2 m) and 250 Watts (70 cm). Use K400 and K600 series mounts. **NR7900A HRO Price \$84.95**

#### Quad Band FM


10 m / 6 m / 2 m / 70 cm quad FM band antenna for FT8900R radio or multi radio applications. Use K400 and K600 series mounts. **CR8900A HRO Price \$99.95**

#### 2m / 70cm Mobile

Ideal antenna for increased performance of HT radio or where a compact antenna is required. Magnetic mount base. 1/4 wave (2 m) and 1/2 wave (70 cm), black finish. Available in UHF or SMA cable configuration. **MR77 / MR77SMA HRO Price \$37.95**


#### 2 m / 70 cm Mobile

**NR-770HRKS HRO Price \$109.95**

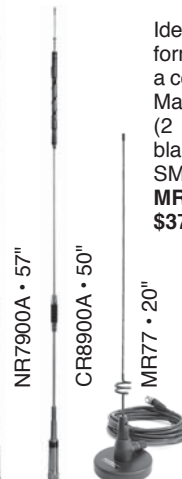

## Diamond Mobile Antennas

Factory adjusted for American amateur bands, no tuning required unless specified. Mobile antennas have fold-over feature with spring loaded hinge (except NR72BNMO, NR73BNMO, M285, M685, MG200, MR77 and MR77SMA). Magnetic mount not recommended for antennas over 50".

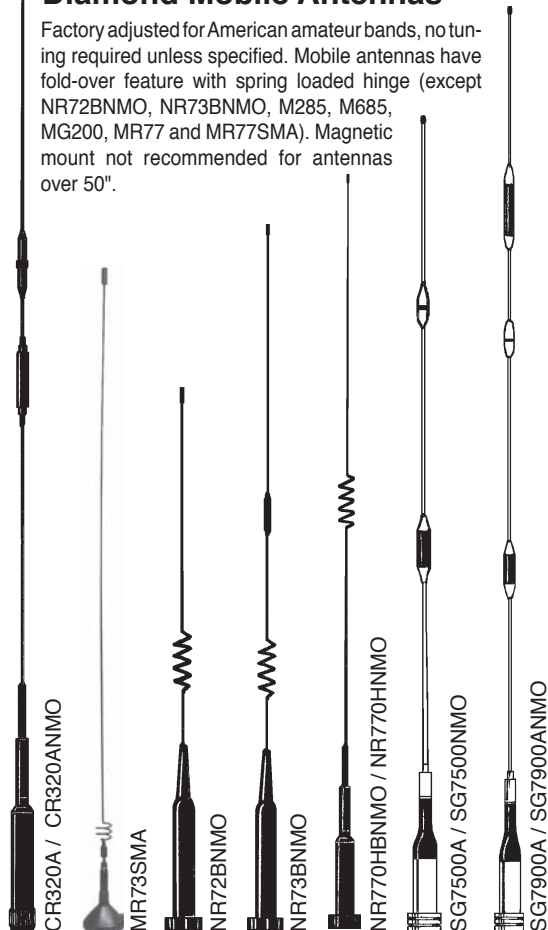


Model	Bands	Gain/dB	Watts	Mount	Lth/in	HRO Price
AZ504SP	2m/70cm	2.15 dBi	50	UHF	15.5	\$39.95
AZ507RSP	2m/70cm	2.15(2m) 4.9(70cm)	50	UHF	27.5	\$46.95
CR320A <sup>#,4,5</sup>	2 m/1 -1/4 m/70cm	2.1/3.8/5.5	100	UHF	36	\$79.95
CR320BNMO <sup>#,4,5</sup>	2 m/1 -1/4 m/70cm	2.1/3.8/5.5	100	NMO	36	\$79.95
CR627B <sup>#,4,5</sup>	6m/2m/70cm	2.1/4.5/7.2	150	UHF	60	\$84.95
CR627BNMO <sup>#,4,5</sup>	6m/2m/70cm	2.1/4.5/7.2	150	NMO	60	\$84.95
CR8900A <sup>4,7(FM Only)</sup>	10m/6m/2m/70cm	2.15(2m) 5.5(70cm)	60	UHF	50	\$99.95
D220 discone	100-1600 MHz	2	50	PL-259	35.5	\$109.95
MG200 <sup>7</sup>	2.4 GHz	7	-	N	23.6	\$59.95
HF6FX <sup>4,7</sup>	6 m	2.15	250	UHF	44	\$69.95
HF50CX <sup>4,7</sup>	6 m	3.5	200	UHF	71	\$99.95
M285 <sup>4,8</sup>	2 m	3.4	200	UHF	52.4	\$31.95
M285SNMO <sup>4,8</sup>	2 m	3.4	200	NMO	52.4	\$31.95
MR73S Mag Mt	2m/70cm	2.15/3.4	10	SMA	20	\$26.95
MR73SJ Mag Mt	2m/70cm	2/3.4	10	SMA	20	\$26.95
MR75S Mag Mt	2 m/70 cm	2.15/3.4	35	SMA	20	\$36.95
MR75SJ Mag Mt	2 m/70 cm	2/2.4	35	SMA	20	\$36.95
MR77 <sup>#,7</sup>	2 m/70 cm	2.15/3.4	70	†	20	\$37.95
MR77SMA <sup>#,7</sup>	2m/70cm	2.15/3.4	70	&	20	\$37.95
MR77SJ Mag Mt	2m/70cm	2.15/3.4	70	SMA	20	\$37.95
M685S <sup>4,7</sup>	6 m	2.15	200	UHF	52.4	\$31.95
M685SNMO <sup>4,7</sup>	6 m	2.15 dBi	200	NMO	52.4	\$31.95
NR124	23 cm	8.4	100	Type N	25	\$49.95
NR124NMO	23 cm	8.4	100	NMO	25	\$54.95
NR140BNMO	220 MHz	4	159	NMO	36.2	\$46.95
NR22L <sup>4</sup>	2 m	6.5	100	UHF	96.8	\$64.95
NR2000NA	2 m/70 cm/23 cm	3.15/6.3/9.7	100	N	39	\$84.95
NR-72BNMO <sup>#,4,7</sup>	2 m/70 cm	2.1/2.1	100	NMO	14	\$39.95
NR-73BNMO <sup>#</sup>	2 m/70 cm	2.1/5.3	100	NMO	33	\$54.95
NR-770HA	2 m/70 cm	3.0/5.5	200	UHF	40	\$48.95
NR-770HNMO	2 m/70 cm	3.0/5.5	200	NMO	41	\$53.95
NR-770HB <sup>#</sup>	2 m/70 cm	3.0/5.5	200	UHF	40	\$53.95
NR-770HBNMO <sup>#</sup>	2 m/70 cm	3.0/5.5	200	NMO	41	\$53.95
NR-770HRKS <sup>°</sup>	2 m/70 cm	3.0/5.5	200	UHF	40.2	\$109.95
NR-7900 <sup>4</sup>	2 m/70 cm	3.7/6.4	300/250	UHF	57	\$84.95
SD330 screwdriver	3-30 MHz		200	UHF	73	\$389.95
SG7000A <sup>4,7</sup>	2 m/70 cm	2.1/3.8	100	UHF	18	\$69.95
SG7500A	2 m/70 cm	3.5/6.0	150	UHF	41	\$69.95
SG7500NMO	2 m/70 cm	3.5/6.0	150	NMO	42	\$72.95
SG7900A <sup>4</sup>	2 m/70 cm	5.0/7.6	150	UHF	60	\$99.95
SG7900A/NMO <sup>4</sup>	2 m/70 cm	5.0/7.6	150	NMO	62	\$114.95

## Diamond Duplexers and Triplexers

Model	Port	Freq MHz	CW Watts	PEP Watts	Loss dB	Isol. dB	MIX Conn.	Port Conn.	HRO Price
MX-37	LPF HPF	1.6 - 470 900 - 1300		100 50	.25 .45	45 45	N-Jack(F)	PL-259/12" cable N-Male /12" cable	\$59.95
MX-62M	LPF HPF	1.6 - 56 76 - 470		200 200	.2 .2	50 50	SO-239	PL-259/12" cable 259/12" cable	\$69.95
MX-72D	Similar to MX-72H, but Direct Connection								\$46.95
MX-72H	LPF HPF	1.6-30 140-150 400-460	400 150 100	400 150 100	.1 .1 .2	60 60 60	SO-239	PL-259/12" cable 259/12" cable	\$49.95
MX-72N	Similar to MX-72H, but type-N on UHF port								\$49.95
MX-72A	Similar to MX-72N, but type-N on MIX Conn.								\$54.95
MX-214	LPF HPF	140-150 220 - 225		300 200	.3 .4	40 40	SO-239	PL-259/12" cable 259/12" cable	\$65.95
MX-324	LPF BPF HPF	1.6-150 220-225 400-550		800 600 500	.3 .4 .4	40 40 40	SO-239	PL-259/12" cable PL 259/12" cable PL- 259/12" cable	\$89.95
MX-610	LPF HPF	1.3 - 30 49 - 470		600 500	.2 .25	45 45	SO-239	PL-259/12" cable 259/12" cable	\$69.95
MX-2000	LPF BPF HPF	1.6-60 110-170 300-950		800 800 500	.15 .20 .25	60 60 60	SO-239	PL-259/12" cable PL 259/12" cable PL- 259/12" cable	\$83.95
MX-3000	LPF BPF HPF	1.6-160 350-500 850-1300		800 400 200	.15 .25 .30	55 55 55	N-Jack(F)	PL-259/12" cable PL 259/12" cable PL- N-male/12" cable	\$79.95
MX-3000N	Similar to MX3000, but with Type-N male on BPF connection								\$85.95

- # Black anodized finish.
- † Mag mount with 13' RG58 cable w/UHF.
- & Mag Mt w/13' RG58 cable w/SMA.
- 4 Magnetic mounts not recommended. Vehicle ground required.
- 5 52-54 MHz only.
- 6 100 Watts on 1-1/4 m; 200 Watts on 2 m and 70 cm.
- 7 Gain Rated in dBi.
- 8 Tunable from 144-174 MHz.
- 9 Black with adhesive-backed mount.

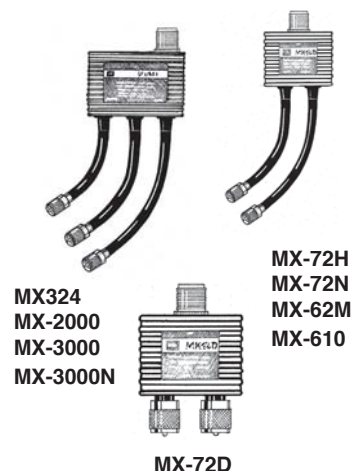



# ACCESSORIES & MOUNTS


## Special Trunk Mount

for 3/8 x 24 thread antennas  
K400-3/8C  
HRO Price \$73.95

Here's the ideal mounting system for Outbacker Perth, OB Jr., and other medium weight antennas. A spring is recommended for stiff or heavy antennas.

Power: 350 Watts RMS  
Cable: 6 1/2' RG316  
Teflon® coax  
Connector: PL-259  
Adjustment: 2 axis

**Note:** Use C110, 10- foot extension for front radio installation.  
**\$19.95**



## Diamond Accessories


Model	Description	HRO Price
SP-1000	Lightning Protector DC-1000 MHz, Max Power 400 W PEP, SO-239, VSWR <1.2	\$29.95
SP-1000PW	Lightning Protector DC-1000 MHz, Max Power 400 W PEP, SO-239(F), SO-239(M), VSWR <1.2	\$34.95
SP-3000P	Lightning Protector DC-3000 MHz, Max Power 400 W PEP, Type-N(F), Type-N(M), VSWR <1.2 Waterproof	\$41.95
SP-3000W	Lightning Protector DC-3000 MHz, Max Power 200 W PEP, Type-N, VSWR <1.2 Waterproof	\$41.95
MGC-50	Window feedthru assembly, HF-50 MHz 50 W, 2 m 40 W, 440 MHz 30 W, 1200 Hz 10 W, SO-239	\$53.95
CX-210A	Heavy duty wideband coax switch, DC-1000 MHz. 1.5 kW, UHF(F) to UHF(M) Waterproof	\$49.95
CX-210N	Heavy duty wideband coax switch, DC-1500 MHz. 1.5 kW, N connector.	\$79.95
CX-310A	Heavy duty 3 position coax switch, wideband. DC-800 MHz. SO-239 connectors.	\$89.95
DL-30A	Dummy load. DC-500 MHz, 15 W RMS (max)/100 W peak. PL-259 connector.	\$39.95
DL-30N	Dummy load. DC-1500 MHz, 15 W RMS (max)/100 W peak. Type N connector.	\$54.95
D38-24	UHF to 3/8-24 Adapter	\$19.95
SS-770R	Phasing Harness, 114 MHz, 430 MHz, Input SO-239, Output x2 PL-259	\$74.95

## Mobile Mounts


Model	Description	HRO Price
C101	UHF base 6.5' RG316 Teflon coax w/PL259	\$37.95
C101NMO	NMO base 6.5' RG316 Teflon coax w/PL259	\$37.95
C101-3/8C	Replacement cable only for K400-3/8C	\$34.95
C101-3/8C Kit	Replacement cable and hardware for K400-3/8C	\$44.95
C104SMA	4' RG58/U Extension cable for PL-259. 90 degree SMA Male & SO-239	\$16.95
C105SMA	5' RG58/U Extension cable for C101/C101NMO. 90 degree SMA Male	\$16.95
C110BNC	10' RG316 extension cable for C101/C101NMO. Use front radio installations. BNC male	\$29.95
C110SMA	10' RG316 extension cable for C101/C101NMO. Use front radio installations. SMA male	\$29.95
C110	10' mini-8/RG8X extension cable for C101/C101NMO. Use front radio installations.	\$19.95
C211	Combination of C101 and C110. 16.5 feet cable assembly	\$49.95
C213S	UHF base, 13.5' RG316 Teflon Coax with PL-259	\$44.95
C213SNMO	NMO base, 13.5' RG316 Teflon Coax with PL-259	\$45.95
CRM	Stainless steel right angle mount with U-bolt	\$16.95
DPK-4NM-N	Type N Magnet. 13' 5mm coax w/Type-N plug. Good to 1300 MHz.	\$54.95
HRKS	Adhesive backed UHF mount, 13.5' RG316 teflon coax with SMA and PL-259 adapter	\$69.95
K400-3/8C *	Special mount for 3/8X24 thread Antenna. 6.5 feet RG316 w/PL-259	\$73.95
K400C *	Deluxe mount with UHF type base. 6.5 feet RG-316 Teflon coax w/PL-259	\$73.95
K400CNMO *	Deluxe mount with NMO type base. 6.5 feet RG316 Teflon coax w/PL-259	\$73.95
K400S	Deluxe mount with UHF type base. 13.5 feet RG316 w/SMA (PL259 adapter included)	\$79.95
K400SNMO	Deluxe mount with NMO type base. 13.5 feet RG316 w/SMA (PL259 adapter included)	\$79.95
K412C	Trunk/hatchback mount. UHF base, 6.5' Teflon coax w/PL-259. 45" max ant	\$59.95
K412CNMO	Trunk/hatchback mount. NMO base, 6.5' Teflon coax w/PL-259. 45" max ant	\$59.95
K412S	Trunk / hatchback mt. UHF base, 13.5' RG316 coax w/SMA. (PL259 adapter included)	\$69.95
K412SNMO	Trunk / hatchback mt. NMO base, 13.5' RG316 coax w/SMA. (PL259 adapter included)	\$69.95
K515S	Deluxe luggage carrier mt. UHF base. 13.5 feet RG316 w/SMA (PL259 adapter included)	\$69.95
K515SNMO	Deluxe luggage carrier mt. NMO base. 13.5 feet RG316 w/SMA (PL259 adapter included)	\$69.95
K540KM	Deluxe Mirror/Luggage rack mount. Black, adjustable. 13' RG58C/U w PL259	\$59.95
K550KM	Deluxe mini van luggage rack mount. Black, adjustable. 13' RG58C/U w PL259	\$69.95
K550L	Oversize version of K550	\$46.95
K600M	Tilt angle (0-9 degrees) trunk mount. Black. RG-188 and low loss 7 mm cable.	\$59.95
K600S	Tilt angle (0-9 degrees) trunk mt UHF base. 13.5 feet RG316 w/SMA (PL259 adapter inc.)	\$62.95
K702M	Deluxe low-profile magnet/suction mount. 6.5" diameter, 13' RG58 & PL-259	\$49.95
K9000LRM	Motorized mount for luggage rack. Use C-series cable assemblies	\$119.95
K9000LRMO	Same with oversize K515 hardware	\$119.95
K9000TM	Motorized mount for trunk lid. Use C-series cable assemblies	\$119.95
SPM35	UHF type base on heavy 1.5 lb/4" magnetic, 13' 5mm coax with PL-259.	\$44.95
SPMNMO	NMO type base on heavy 1.5 lb/4" magnet, 13' 5mm coax with PL-259	\$49.95



K702M




SPM35  
SPMNMO  
DPK4NM-N




K600M  
K600S



K412CNMO  
K412SNMO  
K412C  
K412S



K400C  
K400CNMO  
K400-3/8C  
K400S  
K400SNMO

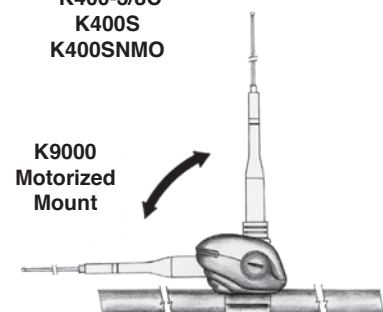

K9000  
Motorized  
Mount


9. Use C110 for front radio installations

### Choosing Your Larsen Mobile Antenna

Choose your antenna configuration based on the frequency, base type (e.g., magnetic mount) and thread type (e.g., NMO). Keep in mind that it is necessary to select a base with the same mounting style as the antenna. Typical bases and styles are shown below.

#### Thread Types

These are examples of each of the thread types. Select one and then select the base.

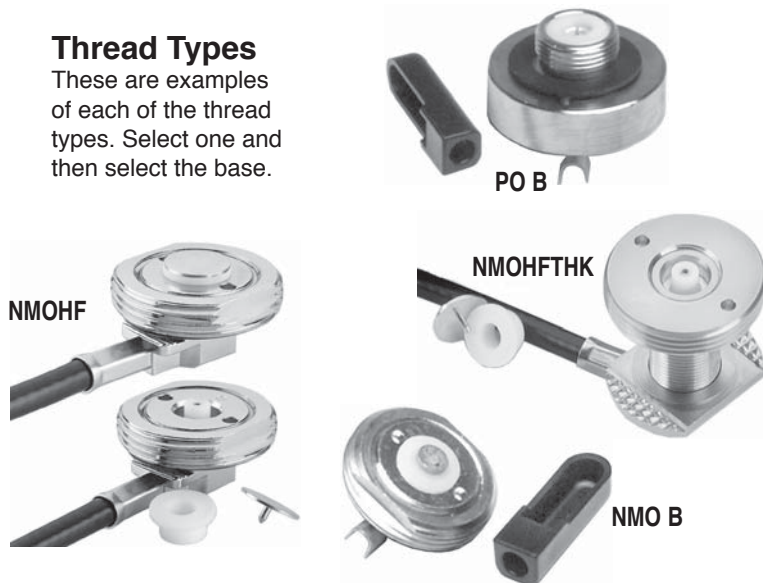

#### Mount Configurations

In addition to the popular Motorola 3/4" (NMO) mounts shown here, mobile antennas for the Larsen mount (LM) and PO mount (PO) are excellent choices for amateur use. Each of these mounts comes in one of the thread types.

Mounts:

NMO K premium quality rooftop.

NMO MMR mag mount, 80# pull strength.

NMO TLP heavy duty trunk lid.

NMO TMB electropolished trunk gutter bracket.

NMO HF for low or high frequencies (pull center pin and insulator for high frequencies).

NMO HFTHK NMO thick mount (surfaces to 1/2" thick) high or low frequencies.



#### Magnetic Mount

**BNC MM BNC**

Connectors: BNC on the mag and coax. Coax: RG 58 A/U, 12'

### NMO Series Antennas

#### Select an Antenna

Once the base and thread type are selected, the final step is to choose the antenna.

All Larsen mobile antennas meet the industry's most demanding specs for electrical efficiency and mechanical durability.

Gain antennas are made of a coil and a whip. Quarter wave antennas are just a whip.

- Colors: Black coil base; chrome or all black whip.
- 1-year No-Nonsense Warranty.™
- Made in USA

### Scanner Antenna

#### Tri-Band Antenna NMO-

**150 / 450 / 800**

This is a great antenna for scanner operation. It is NOT tunable for amateur operation.

Frequency.... 150-165 /  
..... 450-470 /  
..... 806-940 MHz  
Gain .. 2.14 dBi ± 1 dB  
Mount.....NMO  
Height ..... 16.5"



**A** NMO 150 B (2 m)  
Frequency:..... 144-174 MHz  
Gain:..... 3 dB  
Electrical:..... 5/8 Wave  
Height: ..... 49"

**B** NMOQ C  
Frequency:..... 144-448 MHz  
Gain:..... Unity  
Electrical:..... 1/4 Wave  
Height: ..... 22" max.

**C** NMO 220 B (1.25 m)  
Frequency:..... 220-225 MHz  
Gain:..... 3 dB  
Electrical:..... 5/8 Wave  
Height: ..... 32"

**D** NMO 2 / 70  
Frequency:..... 144-148 MHz  
..... 442-448 MHz  
Gain:..3.8 dBi VHF5.2 dBi UHF  
Electrical:..center loaded 1/2  
wave VHF  
Collinear UHF  
Height: ..... 34 3/4"


**Call a  
Helpful  
Ham at  
HRO for  
Quotes  
on Larsen  
Antennas**



## Dual-Band Antennas

Larsen dual band antennas provide excellent performance on 2m and 70 cm. Each antenna is factory preset to guarantee optimal performance with no tuning required.

- Range of dual band configurations is available.
- Kulrod copper-plated 17-7 stainless steel rods for greater transmit range.

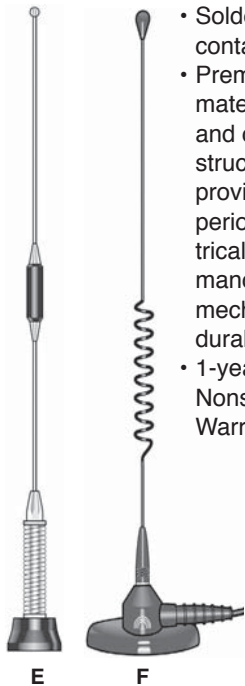

- Soldered contacts.
- Premium materials and construction provide superior electrical performance and mechanical durability.
- 1-year No-Nonsense Warranty™

### **E** NMO 2 / 70 SH

Frequency: 144-148/440-450 MHz  
Gain: .....Unity  
Power: .....100 Watts  
Type: ...VHF: Center load 1/4 wave  
.....UHF: Center load 3/4 wave  
Base: . NMO UHF base B w/spring  
Height: .....17"

### **F** MM 2 / 70 PL


Frequency: 144-148/440-450 MHz  
Gain: .....Unity  
Power: .....100 Watts  
Coax: .. RG58 A/U Dual Shield, 12'  
Pull strength: ..... 54 lbs.  
Type: ...VHF: Center load 1/4 wave  
.....UHF: Center load 3/4 wave  
Base: ..... 3" round magnet mount  
Connector: ..... PL 259 installed  
Weight: ..... 1 lb.  
Height: .....17"

## On-Glass Antennas

Larsen's advanced design techniques in glass-mount antennas result in superior transmit range plus tremendous mechanical durability. Glass mount performance is nearly identical to rooftop mounts, with no holes to drill. Properly installed on-glass antennas grip for years under demanding conditions, yet are easy to remove and remount.

### Dual Band

The KG 2 / 70 is a VHF half-wave and a UHF collinear. It comes with 14 feet of RG-58/U coax.

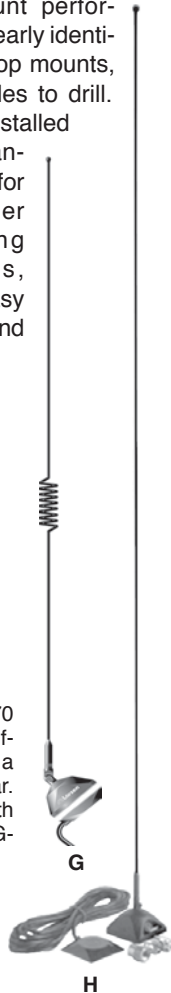


The antenna installs easily on any flat surface. Remove the whip without tools for car washes or low garages. **HRO Price \$124.95**

### Dual Band

### **G** KG 2/70-CX-PL

Frequency: 144-148 / 442-448 MHz  
Gain: 2.4 dB VHF; 4.5 UHF  
Power: 50 Watts  
Type: 1/2 wave / Collinear  
Connector: PL 259 (loose)  
Height: 32-3/4"

- Patented low-impedance design is electrically efficient.
- Single-band antennas are precut, 1/2 wave design.
- Transformer outside vehicle.
- Copper plated whips.
- Rated 50 Watts output.
- Less than .5 dB loss through glass vs. rooftop.
- New circuit board technology locks in solid state performance.
- 3M's best on-glass adhesive grip.
- Made in USA with 1 year No-Nonsense Warranty™

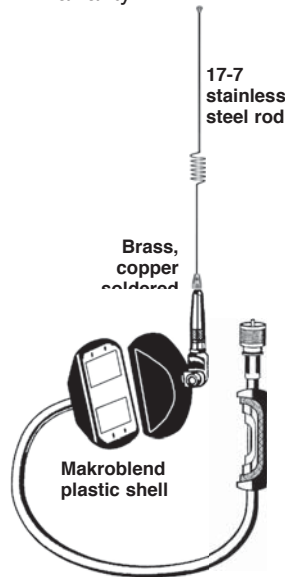

### 2 m Single Band

**H** KG 144 PL  
Frequency: ..... 144-160 MHz  
Gain: .....2.4 dB  
Type: ..... 1/2 Wave  
Connector: ...PL 259 (loose)  
Height: ..... 45"

**Ask About  
Free  
Shipping**

## In-Building Public Safety Antennas



### PSIBVHF 132-174 MHz

#### Features.

- Wide bandwidth VHF 132-174 MHz operation.
- Aesthetically pleasing: 1.5 mm (0.060 inch) thickness to ceiling.
- VSWR < 2:1.
- Optimized to low-frequency in-building environments.
- 15 x 15 inch (380 x 380 mm).

#### Applications

- In-building repeater systems.
- Bi-directional amplifier.
- Police, fire, government.
- Low profile ceiling mounting.
- Enhanced for in-building: gain-set to IB environment; multi-floor coverage; avoids the nulls of traditional dipoles.



**Installed antenna fits flush with ceiling.**

### PSIBVHF 132-174 / 380-570 / 700-960 MHz

#### Features

- Wide bandwidth VHF, UHF 132-174 MHz, 380-570 MHz, 700-960 MHz.
- Aesthetically pleasing: 1.5 mm (0.060 inch) thickness to ceiling.
- VSWR < 2:1.
- Optimized to low-frequency in-building environments.

#### Applications

- In-building repeater systems.
- Bi-directional amplifier.
- Police, fire, government.
- Low profile ceiling mounting.
- Enhanced for in-building: modest gain; multi-floor coverage; avoids the nulls of traditional dipoles.

## Comet Dual-Band Antennas

MODEL	BANDS	GAIN	MAX PWR Watts	CONN	WGT Lbs' oz"	LEN FT' In"	MAX Wind Speed MPH	HRO Price
<b>Dual Band Base Station Repeater Antennas</b>								
GP-9*	2m/70cm	8.5/11.9	200	SO-239	5'11"	16'6"	90	\$214.95
GP-9N*	2m/70cm	8.5/11.9	200	N	5'11"	16'6"	90	\$209.95
GP-6*	2m/70cm	6.5/9.0	200	SO-239	3'8"	10'5"	90	\$149.95
GP-3*	2m/70cm	4.5/7.2	200	SO-239	2'12"	5'11"	112	\$99.95
GP-1	2m/70cm	3.0/6.0	200	SO-239	2'	4'2"	135	\$74.95
<b>Dual Band Mobile Antennas - All Black Anodized</b>								
SBB-7/SBB-7NMO	2m/70cm	4.5/7.0	70	PL/NMO	-	4'7"	-	\$79.95
SBB-5/SBB-5NMO	2m/70cm	3.0/5.5	120	PL/NMO	-	3'2"	-	\$58.95
SBB-2/SBB-2NMO	2m/70cm	2.15/3.8	60	PL/NMO	-	20"	-	\$42.95
B-10M / B10NMO	2m/70cm	-/2.15	50	PL/NMO	-	12"	-	\$42.95

\* some longer antennas require additional freight

## Comet Tri-Band Antennas


MODEL	BANDS	GAIN	Max Pwr Watts	CONN	WGT Lbs' oz"	LEN FT' In"	Max Wind Speed MPH	HRO Price
<b>TrBand Base Station Repeater Antennas</b>								
GP-15 #	6m/2m/70cm	3/6.2/8.6	200	SO-239	2'15"	7'11"	90	\$169.95
GP-98 #	2m/70cm/23cm	6.5/9.0/13.5	100	N-Female	3'6"	9'4"	90+	\$189.95
CX-333 #	2m/220/70cm	6.5/7.8/9.0	120	SO-239	3'10"	10'2"	112	\$169.95
<b>TriBand Mobile Antennas</b>								
SBB-15 #	6m/2m/70cm	2.15/4.5/7.2	120	PL-259	-	4'10"	-	\$84.95
SBB-97	2m/70cm/23cm	3.0/6.8/9.6	100	N-Male	-	3'3"	-	\$84.95
SBB-224	2m/220/70cm	2.15/3.2/5.5	150	PL-259	-	3'1"	-	\$69.95
SBB-224NMO	2m/220/70cm	2.15/3.2/5.5	150	NMO	-	3'1"	-	\$69.95
<b>HF Antennas</b>								
UHV-6 #	40/(20*)/(17*)15/10/6/2m/70cm	HF 0 dBi 2m 2.15 dBi 70cm 5.5 dBi	120 SSB HF 100W FM 6-70cm	PL-259	MAX 1'4"	MAX 6'4"	-	\$169.95
*L-14	Opt 20m coil for UHV-6						-	\$31.95
*L-18	Opt 17m coil for UHV-6						-	\$29.95
*L-3.5	Opt 75/80m coil for UHV-6						-	\$34.95
CHA-250B #	Ground Plane 3.5-57 MHz		150W SSB HF 125W CW	SO-239	7'11"	23'8"	67.5	\$389.95

\* For the UHV-6 optional bands.

# some longer antennas require additional freight

## 6 Meter Antenna

MODEL	Description	FREQ	GAIN	F/B	Max Pwr Watts	CONN	SWR	LEN FT'In"	HRO Price
CA-52HB4	4 element beam	50-54 MHz	-	19 bD	400 W PEP	SO-239	<1.5:1	10'6 Boom	\$129.95

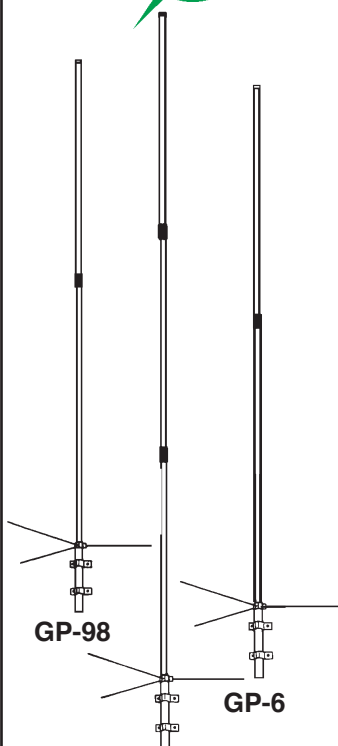


GP-9

## Dual- & Tri-band VHF / UHF

Comet developed the Super Linear Converter (SLC) to increase actual gain of dual and triband antennas.

- A complete pre-formed phasing coil and phosphorus copper element eliminate additional components and gain loss.
- The SLC is electrically very efficient, providing a low angle of radiation, directly to the horizon.
- Comet sectional antennas use ABS (Transparent to RF) connecting joints for the finest pattern and easiest assembly.

SBB-224

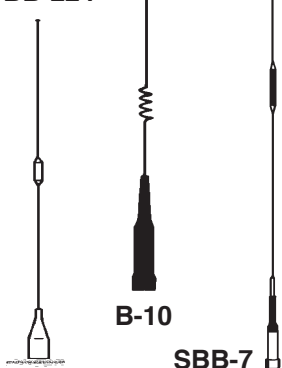

B-10

SBB-7





## 2 m and HT Antennas

MODEL	BANDS	GAIN	Max Pwr Watts	CONN	LEN FT/In"	HRO Price
<b>Single Band Antennas</b>						
SBB-25/SBB-25NMO	2m	4.1	100	PL-259/NMO	48"	\$48.95
<b>HT Antennas</b>						
CH-32 MINI Ant	2m/70cm	-	10	BNC	1.75"	\$29.95
MH-510	6m/2m/70cm	0/0/3.2	10	SMA	20.75"	\$37.95
MH-511	6m/2m/70cm	-	10	SMA	4.25"	\$33.95
HT-224	2m/220/70cm	1.3/1.4/1.8	10	SMA	11"	\$39.95
SMA-501 MINI Ant	2m/70cm	-	10	SMA	1.5"	\$29.95
SMA-3	2m/70/33cm	1.2/1.7/3.4	-	SMA	9.75"	\$39.95
SMA-24/SMA-24J	2m/70cm	2.15/5.3	20	SMA/Rev SMA	17.5	\$24.95
BNC-24	2m/70cm	-	20	BNC	17.5	\$24.95
SMA-503/SMA-503J	2m/70cm	-	10	SMA/Rev SMA	8.5"	\$29.95
CH-75	2m/70cm	-3.2	50	BNC	14.75	\$24.95
SH-95	2m/70/23cm	1.5/2/5.5	10	BNC	15"	\$29.95

## Comet High-Power Duplexers and Triplexers

Zinc-alloy, die-cast, twin cavity, low input loss, high-isolation, and high-power. Modernize your station with Comet high-performance antenna products.

MODEL	PORT	Freq MHz	CW Watts	PEP Watts	Loss dB	Isol dB	Mix Conn	Port Conn	HRO Price
CF-416A (2m/70cm)	LPF HPF	1.3-150MHz 400-540MHz	450 300	800 500	0.15 0.25	60 60	SO-239	PL-259 w/leads PL-259 w/leads	\$49.95
CF-416C (2m/70cm)	LPF HPF	1.3-150MHz 400-540MHz	450 300	800 500	0.15 0.25	60 60	N-Female	PL-259 w/leads N-Male w/leads	\$54.95
CF-4160I (2m/70cm)	LPF HPF	1.3-150MHz 400-540MHz	450 300	800 500	0.1 0.2	60 60	SO-239	PL-259 w/o leads N-Male w/o leads	\$48.95
CF-4160K (2m/70cm)	LPF HPF	1.3-150MHz 400-540MHz	450 300	800 500	0.1 0.2	60 60	SO-239	PL-259 w/o leads PL-259 w/o leads	\$48.95
CF-416B (2m/70cm)	LPF HPF	1.3-150MHz 400-540MHz	450 300	800 500	0.15 0.25	60 60	SO-239	PL-259 w/leads N-Male w/leads	\$49.95
CF-706A (2m/70cm)	LPF HPF	1.3-75MHz 75-470MHz	175 175	350 350	0.5 0.5	40 40	SO-239	PL-259 w/leads PL-259 w/leads	\$69.95
CF-530 (6m/125-470)	LPF HPF	1.3-90MHz 125-470MHz	350 350	600 600	0.2 0.2	45 45	SO-239	PL-259 w/leads PL-259 w/leads	\$74.95
CF-530C (6m/125-470)*	LPF HPF	1.3-90MHz 125-470MHz	350 350	600 600	0.2 0.2	45 45	PL-259	SO-239 w/o leads SO-239 w/o leads	\$74.95
CF-360A (10m/6m)	LPF HPF	1.3-30MHz 50-470MHz	350 350	600 600	0.2 0.2	45 45	SO-239	PL-259 w/leads PL-259 w/leads	\$69.95
CFX-4310C (2m/70cm/1.2)	LPF	1.6-60MHz	600	1KW	0.15	50	N-Female	PL-259 w/o leads	\$79.95
	BPF	100-150MHz	450	800	0.25	50		PL-259 w/o leads	
	HPF	350-500MHz 840-1.4GHz	300 100	500 200	0.25 0.3	50 50		N-Male w/o leads	
CFX-514 (6m/2m/70cm)	LPF	1.3-90MHz	450	800	0.2	55	SO-239	PL-259 w/leads	\$79.95
	BPF	130-200MHz	450	800	0.25	55		PL-259 w/leads	
	HPF	380-500MHz	300	500	0.3	55		PL-259 w/leads	
CFX-514J (6m/2m/70cm)	LPF	1.3-90MHz	450	800	0.15	55	SO-239	SO-239 w/o leads	\$79.95
	BPF	130-200MHz	450	800	0.2	55		SO-239 w/o leads	
	HPF	380-500MHz	300	500	0.25	55		SO-239 w/o leads	
CFX-324A (2m/220/70cm)	LPF	1.3-150MHz	350	600	0.2	40	SO-239	PL-259 w/leads	\$88.95
	BPF	200-320MHz	350	600	0.25	40		PL-259 w/leads	
	HPF	390-500MHz	350	600	0.3	40		PL-259 w/leads	
CFX-324B (2m/220/70cm)	LPF	1.3-150MHz	350	600	0.2	40	SO-239	PL-259 w/o leads	\$85.95
	BPF	200-320MHz	350	600	0.25	40		PL-259 w/o leads	
	HPF	390-500MHz	350	600	0.3	40		PL-259 w/o leads	

\* To run multiple antennas with the Yaesu FT-8900

# DUPLEXERS

## Dual 2 m / 440 MHz

### 2 m / 70 cm Mobile Antenna Now with NMO Connector

#### CA-2x4SRNMO

Comet's popular CA-2x4SR broadband mobile antenna now is available with an NMO connector. Black anodized finish. 3.8 / 6.2 dBi gain.

HRO Price \$69.95

### Flexible Dual-Band SBB-1

Convenient, very flexible 2 m / 70 cm 17" antenna. Comes with either a gold-plated PL-259 (Model SBB-1) or NMO connector (Model SBB-1NMO).

#### Gain:

146 MHz 1.5 dBi 1/4 wave  
446 MHz 2.15 dBi 1/2 wave

Max Power: 60 Watts

VSWR: 1.5:1 or less

HRO Price \$42.95

### Dual-Band Mag Mount Antenna M-24

Economical black anodized 2 m / 70 cm antenna is 19.5" tall and comes with 13 feet of RG-58/U coax and either a gold-plated PL-259 (Model M-24M) or BNC connector (Model M-24B) or model M-24S (SMA) soldered on.

#### Gain 146 MHz:

1.7 dBi 3/8 wave

#### Gain 446 MHz:

4.1 dBi 1/4 + 5/8 wave

Max Power: 80 Watts

VSWR: 1.5:1 or less

Impedance: 50 Ohm

HRO Price \$39.95

#### M-24M

## Duplexer

### All-Female Duplexer CF-4160N

1.3-170 / 350-540 MHz duplexer with three N-female connectors allows the user to attach their own low loss jumpers in the length needed.

HRO Price \$58.95



## Mounts



### Vehicle Specific Antenna Brackets

These stainless-steel no-holes-to-drill mounts use an existing fender bolt under the hood. A 3/4-inch hole accepts a standard NMO type connector or use Comet UHF connector mobile cable assemblies. Specific mounts for most popular trucks and SUVs: Chevrolet, Ford, Dodge, GMC. Call HRO for compatibility. *Pictured: DG2ANTPF Dodge Ram 1500 2009-2014*  
**HRO Price \$19.95**




### Universal Mount CP-5M / CP-5NMO

These universal mounts use the heavy-duty RS-730 lip bracket. Each includes 5 meters (16'6") of deluxe 2-step coax and an antenna mount connector: gold-plated PL-259 on coax end with detachable barrel for easy installation. 18-inch lead of mini RG-174 coax for easy entry through the weather seal. Choose the model that has the connector for the antenna you are using. **HRO Price \$69.95**


### Window Gap Jumper

CTC-50M

This device crosses the space between window frames. The frequency range is up to 1.3 GHz with SO-239 connectors. Max pwr HF 100 W PEP, VHF 60 W, UHF 40 W, low loss, 50 ohm impedance. **HRO Price \$54.95**



RG-188 provides easy entry into the vehicle from an exterior mount.



### Roof Rack Mount RS-660U

This new roof-rack mount opens wider than the old version – up to 2.5 inches – and supports bigger antennas.

**HRO Price \$37.95**



# HF ANTENNAS

## HF Antennas



### HF Rotatable Dipole CHV-5X

The CHV-5X is a 5 band rotatable dipole covering 40 / 20 / 15 / 10 / 6 meters.

- Each band is independently tunable.
- Turning radius 7 feet. Weighs 5 lb. 14 oz.
- VSWR less than 1.2:1 at center frequency.
- Impedance 50 ohms. Stainless hardware.
- CBL-2500 2.5 kW balun included.
- Max power: 150 Watts SSB 40 / 20 m; 220 Watts SSB 15 / 10 / 6 m.
- SO-239 connector. Requires mast 1- 2.5 inches.

**HRO Price \$319.95**

### 40 / 20 / 15 / 10 m Rotatable Dipole H-422

This broad-band, compact, rotatable dipole offers excellent performance even when mounted only 10-15 ft. above ground in a V shape. Heavy duty hardware and 2.5 kW balun are included. During assembly the user chooses any of the three pre-drilled holes to tune the 20 / 15 / 10 m SWR dips to the low- mid- or upper-band ranges simultaneously. 40 m TX bandwidth tunes independently of the other three bands.

- Length "V" shape 24' 5", Horizontal 33' 10".
- VSWR less than 1.5:1 or less after tuning.
- Impedance 50 ohms. Stainless hardware.
- Wind Load 3.01 sq feet.
- Max Power 1000 W, SSB / 500 W FM.
- SO-239 connector.

**HRO Price \$339.95**

### 40 m - 70 cm Mobile Antenna UHV-6

Without HF coils attached, the UHV-6 is a tribander for 6 m / 2 m / 70 cm. The top of the element has a threaded socket for the 40 m, 15 m, or 10 m coils (included), making the UHV-6 a quad-band antenna.

- Optional coils for 80 m, 20 m, 17 m.
- Easy to mount and configure.
- Fold-over hinge included.
- GAIN on 2 m: 2.15 dBi; 70 cm: 5.5 dBi.
- Length 48" to approx. 76" maximum.

**HRO Price \$169.95**

### Quad Band 10/6/2 m/70 cm UHV-4

Developed for the Yaesu FT-8900. The 10 m and 6 m bands tune independently and will tune for SSB and FM. Length approx. 54".  
**HRO Price \$119.95**

## Comet Mobile Mounting Systems

Comet has a wide variety of mobile mounts. Choose the mount and coax cable assembly that best fits your personal needs. All Comet cables have detachable connectors.

MODEL	DESCRIPTION	HRO Price
<b>Mounts with Coax Cable Installed</b>		
CP-5M	Universal multi-angle lip mount w/deluxe cable SO-239/PL-259 Conn	\$69.95
CP-5NMO	Same as CP-5M but with NMO/PL-259 Conn	\$69.95
HD5-3/8-24	3/8-24 heavy duty lip mount w/ PL-259 connector	\$69.95
LD-5M	Light duty lip mount, 16'4" deluxe cable assembly, UHF Conn	\$55.95
CM-5M	Standard heavy-duty mag mt with RG-58A/U, coax, UHF conn, max antenna height 4 ft	\$24.95
<b>Mounting Brackets Only, No Coax</b>		
RS-840	Heavy duty lip mount, low profile, accepts SO-239 connector	\$36.95
RS-730	Heavy duty universal lip mount, accepts SO-239 connector	\$32.95
RS-720	Medium duty universal lip mount, accepts SO-239 connector	\$29.95
RS-720NMO	Medium duty universal lip mount, accepts NMO connector	\$29.95
RS-520	Light duty universal lip mount, accepts SO-239 connector	\$29.95
<b>Coax Cable Assemblies</b>		
CK-3M5	17 foot high-quality cable includes 12" RG-188 to avoid water leak/cable damage. UHF Conn	\$42.95
CK-3M	Same as CK-3M5 but 9' 9" of deluxe cable assy, UHF Conn	\$35.95
CK-5N	13' 6" of deluxe 2-step cable assembly, N- Conn	\$49.95
5D4N	13' 6" low loss (2400 MHz) coax cable, N-conn	\$34.95
3D4N	13' 6" low loss (1200 MHz) cable assy, N-conn	\$32.95
<b>Antenna Connector Adapters</b>		
AD-25M	Turns an SO-239 mount into an NMO mount	\$14.95
AD-15M	Turns an NMO mount into an SO-239 mount	\$17.95
AD-10N	Turns an NMO mount into an N-female mount	\$17.95



## Telescopic Masts

These portable, temporary telescopic fiberglass masts extend to the sky! Just pull out each section and twist to lock. Select from five models, 20 to 43 feet. Each mast collapses to an acceptable height for true portability.

These high-strength fiberglass masts are super lightweight – the largest weighs just 7.7 lbs. Twist and Lock sections allow quick pull-up and take-down. Use them while traveling, camping – at hotels, hamfests, field day, DX-peditions.

### MFJ-1917

The largest mast can be used for a full-time permanent wire installation or small, lightweight beam or vertical. Put up a full size inverted Vee, dipole or vertical antenna in minutes and get the height you need to QSO with anyone, anywhere. Use multiple telescopic masts to construct other types of antennas like loops, quads, rotatable dipoles even beams. The ideas are endless!

- MFJ-1910** 33 ft., light duty w/top tie ring.
- MFJ-1911** 20 ft., light duty w/top tie ring.
- MFJ-1913** 28 ft., lightweight w/top tie ring.
- MFJ-1915** 25 ft., for heavy duty use.
- MFJ-1916** 34 ft., for heavy duty use.
- MFJ-1917** 43 ft., heavy duty w/top tie ring.



## Duplexers / Triplexers

### MFJ-916B

Use HF or 2-meter / 440 MHz antennas with separate HF or 2-meter / 440 MHz rigs without a built-in duplexer. Low loss SO-239s, 50 Ohm ports, 200 Watts PEP.



**MFJ-916BN** with N type connector.

**MFJ-916BC** with coax pigtails terminated with PL-259 connectors.

**MFJ-4926S** Triplexer for 1.6-60, 110-170 and 350-570 MHz. SO-239 connectors.

**MFJ-4926C** Triplexer for 1.6-60, 110-170 and 350-570 MHz. Pigtail PL-259 connectors.

**MFJ-4936S** Triplexer for 1.6-150, 220-225 and 400-550 MHz. SO-239 connectors.

## Window Feedthrough



Weather-proof antenna feedthrough panels mount in your window sill to let you bring all your antenna connections into your hamshack without drilling holes through walls. Simply place in window sill and close window.

One cut customizes it for any window up to 48 inches. Use horizontally or vertically. Real Western Red Cedar wood is naturally resistant to rot, decay and insects – lasts longer, maintenance-free. Pitch and resin free for a wide range of beautiful finishes or leave it in its naturally beautiful raw finish. Edges are sealed by weather-stripping to insulate against all weather conditions.

All are 3/4 D x 3-1/2 H x 48 W inches, except for MFJ-4605, which is 3/4 D x 7 H x 48 W. Inside / outside stainless steel plates bond all coax shields together to ground connection. Stainless steel ground post brings outside ground connection inside.

### MFJ-4602

Three SO-239 Teflon® coax connectors let you feed HF / VHF / UHF antennas. High voltage ceramic feed-thru insulators bring 450 / 300 Ohm balanced lines into your hamshack. Ceramic feed-thru insulator for longwire or random wire. Stainless steel ground post.

### MFJ-4603

Four 50 Ohm Teflon® SO-239 coax connectors let you feed HF / VHF / UHF antennas at full legal power limit.

A 50 Ohm Teflon(R) coax N-connector lets you use any antenna up to 11 GHz, including 450 MHz, UHF, satellite, moon bounce and 2.4 / 5.8 GHz Wi-Fi antennas.

A 75 Ohm, 1 GHz F-connector makes it easy to bring in television, satellite, HD, cable TV and FM radio signals.

A pair of high-voltage ceramic feedthru insulators lets you bring in 450 / 300 Ohm balanced lines directly to your antenna tuner.

- A random / longwire antenna ceramic feedthru insulator.
- 5-way binding posts let you supply 50 volts / 15 amps DC / AC power to your outside antenna tuners / relays / switches.
- Stainless ground post brings in ground connection, bonds inside / outside stainless steel panels together and drains away static charges.
- MFJ's exclusive Adaptive Cable Feedthru™ lets you bring in rotator / antenna switch cable, etc. without removing connectors (up to 1-1/4 X 1-5/8 inches). Adapts to virtually any cable size. Seals out rain, snow, adverse weather.

### MFJ-4601

Has six high quality Teflon® SO-239 connectors for HF / VHF / UHF coax-fed antennas and a stainless steel ground post. Handles full 1500 Watt legal limit.

### MFJ-4601N

Like MFJ-4601, but has N-type connectors.

### MFJ-4600

Has four sets of ceramic feedthrough insulators and two SO-239 connectors.

### MFJ-4604

Has five adaptive cable feedthru™ – two for connectors up to 1-1/4 x 1-5/8 inches and three for UHF / N size coax connectors. Adapts to virtually all cables used in ham radio. Seals out weather.

### MFJ-4605

Combines MFJ-4603 and MFJ-4604! Gives every connection you'll ever need and more -- without drilling holes in wall!

## Antenna Insulators

### MFJ-16C06



6-pack of glazed ceramic center / end insulators are extra strong – will not break with long antennas and will not arc-over or melt even under full legal power. Molded ridges give extra-long path to prevent high-voltage breakdown. Smooth 5/16" wire holes prevent wire damage. Center or end insulator for dipoles, doublets, G5RVs, guy wires, vees, etc.

### MFJ-16A06

Glazed ceramic egg insulator, has 7/16" holes. 9/64" diameter by 2-1/8" length. High power.



## HF Magnet Mounts

### MFJ-335BT

5" magnet mount with 17' coax.



### MFJ-336T



Tri-magnet HF mount with 17' coax.



## Octopus Antenna



### Octopus 4-Band Antenna

#### Reach out for big DX!

Choose your favorite four bands! Super easy to assemble! Use metal pole or telescopic mast up to 1-inch, easily secured, tightens with thumbscrew. And . . . just screw in your HamSticks™! (See page 94)

Rotate with a small TV rotator (see Hy-Gain ARI-500, \$129) or just ground mount for omni-directional.

Uses eight Hamsticks™ (two of the same for each band). Tough octagonal enclosure has eight 3/8-24 threaded connectors for Hamsticks.

Has built-in balun and a super strong base tube insulator made of fiberglass filled ABS.

Put this antenna up in minutes! Makes for a great stealth, portable, campground, or permanent base antenna. Super lightweight, 14-foot diameter. Hamsticks™ break down to about four feet for easy storage.

#### HRO Prices:

**MFJ-2100 \$99.95**

Mounting bracket only

**MFJ-2104 \$249.95**

Mounting bracket with your choice of four (two each) 250 W Hamsticks™.

**MFJ-2104H \$479.95**

Mounting bracket with your choice of four (two each) high power 600 W HamSticks™.

**Free UPS Brown Shipping  
on Most Orders  
Over \$100.**

## hy-gain

*Hy-gain rotators are the first choice of hams around the world! One is perfect for your antenna configuration.*

### Ham - V

For medium antenna arrays up to 15 square feet wind load. Includes the DCU-1 Pathfinder digital control unit. No more terminal strips. Features cinch connector plus 8-pin plug at the control box. Maximum mast size 2 1/16".

**HRO Price \$949.95**



### Tailtwister Series II

This unit handles medium communications arrays up to 20 square feet wind load area. Available with the DCU-1 Pathfinder digital control box or standard analog control box. Has 138 ball bearings for large load bearing strength. Maximum mast size 2 1/16".

**HRO Prices: T2X \$719.95, T2XD \$1229.95**



### Ham - IV

The popular Ham-IV is designed for medium antenna arrays up to 15 square feet. It features a dual 98 ball bearing race for load bearing strengths and an electric locking steel wedge brake. Maximum mast size 2 1/16".

**HRO Price \$599.95**



### HDR-300A

Choose this rotator for king-sized antenna arrays up to 25 square feet of wind load. Heavy-duty self-centering steel mast clamp and hardware. Digital display accurate to 1 degree.

**HRO Price \$1349.95**



### AR-40

Especially for large FM-TV and compact communication antenna arrays up to 3.0 square feet wind load area. Dual 12 ball bearing race. Automatic position sensor never needs resetting. Maximum mast size 2 1/16". Includes MSLD light duty lower mast support. **HRO Price \$319.95**



### CD-45II

The CD-45II handles up to 8.5 square feet of antenna wind load when mounted inside the tower or 5 square feet with the included MSLD light duty lower mast adapter. Has 58 ball bearing race. Maximum mast size 2 1/16". **HRO Price \$429.95**





**Super heavy-duty Rotators . . . Super strong double worm gear drives, self-braking, extremely quiet motors, one degree position resolution, automatic digital controller. Up to . . . 38 square feet wind load . . . 8000 inches per pound turning torque . . . 24,000 inches per pound brake torque . . . 700 pounds vertical load**



**Hy-Gain RAS-1**

**Hy-Gain RAS-2**

## Azimuth-Elevation Rotators

### RAS-1 & RAS-2

Hy-gain offers RAS-1 and BIG RAS (RAS-2) super heavy-duty azimuth-elevation rotators. Same heavy-duty design as RAKs and includes the RAS-2C digital controller.

RAS-2 has same specifications as RAS-1 below but with these super specs. Turning power: 5,000 inches per pound at all voltages. Vertical load: greater than 700 pounds. RAS-2 weighs 44 pounds.

**RAS-1 including RAS-2CU controller HRO Price \$1799.95**

**RAS-1R rotator only HRO Price \$1359.95**

**RAS-2 including RAS-2CU controller HRO Price \$2399.95**

**RAS-2R rotator only HRO Price \$1979.95**

### Hy-Gain RAS-1 Specifications

RAS-1 Specs	RAS-1 @ 12 V	RAS-1 @ 18 V	RAS-1 @ 24 V
Wind load area (approx)	30 square feet	30 square feet	30 square feet
Turning torque	1400 inches / pound	1800 inches / pound	3240 inches / pound
Brake torque	14,000 inches / pound	14,000 inches / pound	14,000 inches / pound
Brake construction	Double worm gears	Double worm gears	Double worm gears
Vertical load	550 pounds	550 pounds	550 pounds
Rotation speed (360 degrees)	120 seconds	90 seconds	60 seconds
Precision, rotator weight	1 degree, 29 pounds	1 degree, 29 pounds	1 degree, 29 pounds
Rotation range (Azi/elev)	360 / 180 degrees	360 azi / 180 degrees	360 / 180 degrees
Position sensor	Reed switch	Reed switch	Reed switch
Mast size bottom / elevation	2.6 bottom / 2.0 elevation	2.6 bottom / 2.0 elevation	2.6 bottom / 2.0 elevation



**Hy-Gain REAL-1**

**Elevation Rotator REAL-1**

Elevation rotator has all specifications of the popular RAK-1 but is for moving antennas 180 degrees up or down. Package includes RAK-ICU controller.

**REAL-1 including controller**

**HRO Price \$899.95**

**REAL-1R rotator only HRO Price \$749.95**



**Hy-Gain RAU-1**

**Econo Spid Rotator RAU-1**

Spid's smallest rotator is a step up from mainstream rotators and provides excellent support for direct round mast mounting. Incorporates elevation rotator to provide full AZ/EL capability. Ideal for light duty 3-4 element antennas, short boom, 6-meter beams, and 2-Meter / 70 cm beam antennas.

**RAU-1 including RAK-ICU controller**

**HRO Price \$699.95**

**RAU-1R rotator only HRO Price \$439.95**

## Rotator Controllers



### DCU-3 for Hy-Gain

Digital rotator controller allows you to program 6 beam

headings. Gives fully automatic or manual control of your HyGain Ham or T2X Rotators. Has USB / RS-232 ports for computer control. Adjustable LCD sleep time. Field upgradeable firmware. Press a memory button or dial in your beam heading or let one of the popular software platforms take control for you. Bright blue LCD. Available for 110 VAC or DCU-3X for 220 VAC. **HRO Price \$439.95**

**DCU-2** controller with fewer programmable memories.

### YRC-1 for Yaesu

Replace your Yaesu rotator control box with the YRC-1 rotator controller. Easy to use; dial in your beam heading and tap the GOTO button. Bright blue LCD shows current, dialed-in, and computer-controlled beam headings, and your call sign. USB port for computer control. Fast variable DC motor minimizes overshoot. For current Yaesu – DXA series rotators. **HRO Price \$309.95**

**YRC-3** is like the YRC-1 but adds 6 memories.



## Economy Digital Controller

*for Hy-gain, Ham II, IV, T2X, Yaesu, and many other common rotators*



### Hy-Gain MDS RC-1

The RC-1 is a direct replacement control box for almost all versions of Yaesu rotators. Get ALL these features at half the cost of similar digital controllers!

- It is priced well below the repair cost of many factory control boxes.
- RC-1 uses slave power from existing Ham series, AC controllers (RC1-G, RC1-H). It is emergency and battery-power compatible for DC models.
- You get automatic brake control on Ham series rotators and automatic speed control on DC powered rotators.
- A graphic LCD screen is large and bright blue for easy visibility. Huge beam heading digits!
- The “Go to” button gives you the reciprocal heading.
- Computer-controlled operation via the included USB (for RC1-Y) or serial ports let you use your favorite software programs. Field upgradeable firmware.
- Rugged aluminum for maximum RF shielding is a compact 5-1/4 wide x 3-1/2 height x 4-1/8 inches deep.
- Order RC1-Y for Yaesu; RC1-E for Emotator; RC1-P for Spid; RC1-G and RC1-H for Hygain rotators.

**RC-1 HRO Price \$229.95**

### Hy-Gain RAK-1



#### RAK-1 (RAK)

These super heavy-duty RAK rotators are designed with a simple double worm gear drive. This results in a super-strong ultra-reliable rotator system with inherent self-braking. Each includes a precision automatic digital controller.

Turning is powerful, smooth, precise, and extremely quiet. The inherent self-braking action of its double worm gear drive positively stops it every time – it won't move!

It's fast! A high-torque DC gear motor rotates your antenna 360 degrees in just 60 seconds with 24 volts on the motor. The RAK rotators operate from 12 to 24 volts AC or DC. The higher the voltage, the higher the torque and the faster the turning speed – unique RAK feature.

**RAK-1 including RAK-ICU controller**

**HRO Price \$999.95**

**RAK-1R rotator only HRO Price \$749.95**

### Hy-Gain RAK-2



#### RAK-2 (BIG RAK)

It's simple to mount! Pipe mast mount on both ends allows coax cables to pass through the center of the rotator and prevents cable tangling and damage. Optional adaptor plate mounting. See accessories section below.

It's precise! The included RAK-ICU controller has one degree resolution and a large 3/4 inch 4-digit easy-to-read soft green LED digital readout. Sealed reed switch sensor technology gives reliable all-weather operation and super tight tolerances with minimal play.

Tough and durable! Heavy-duty construction with 3/16" thick-wall steel pipe, ultra-durable steel housing.

**RAK-2 including RAK-ICU controller**  
**HRO Price \$1449.95**

**RAK-2R rotator only HRO Price \$1195.95**

## Hy-Gain RAK-1 Specifications

RAK-1 Specs	RAK-1 @ 12 V	RAK-1 @ 18 V	RAK-1 @ 24 V
Wind load area (approx)	30 square feet	30 square feet	30 square feet
Turning torque	1400 inches/pound	1800 inches/pound	3240 inches/pound
Brake torque	14,000 inches/pound	14,000 inches/pound	14,000 inches/pound
Brake construction	Double worm gears	Double worm gears	Double worm gears
Vertical load	550 pounds	550 pounds	550 pounds
Rotation speed / 360 degrees	120 seconds	90 seconds	60 seconds
Precision	1 degree	1 degree	1 degree
Rotation range	720 degrees	720 degrees	720 degrees
Rotator weight	16 pounds	16 pounds	16 pounds
Position sensor	Reed switch	Reed switch	Reed switch
Mast size top/bottom	2.0 / 2.6 inches	2.0 / 2.6 inches	2.0 / 2.6 inches

## Hy-Gain RAK-2 Specifications

RAK-2 Specs	RAK-2 @ 12 V	RAK-2 @ 18 V	RAK-2 @ 24 V
Wind load area (approx)	38 square feet	38 square feet	38 square feet
Turning torque	>5000 inches/pound	>8000 inches/pound	Contact Hy-Gain
Brake torque	24,000 inches/pound	24,000 inches/pound	24,000 inches/pound
Brake construction	Double worm gears	Double worm gears	Double worm gears
Vertical load	>700 pounds	>700 pounds	>700 pounds
Rotation speed (360 degrees)	120 seconds	90 seconds	60 seconds
Precision	1 or 0.5 degrees	1 or 0.5 degrees	1 or 0.5 degrees
Rotation range	720 degrees	720 degrees	720 degrees
Rotator weight	24 pounds	24 pounds	24 pounds
Position Sensor	Reed switch	Reed switch	Reed switch
Mast size top/bottom	2.6 inches	2.6 inches	2.6 inches





### G2800DXA

The G-2800DXA is a high-technology rotator designed to turn the largest tower-mounted antenna arrays.

### G-800DXA

The G-800DXA rotator is designed for medium to heavy loads and antennas up to 20 square feet, with control box resets.



### Rotator Computer Controller GS-232B

The GS-232G rotator computer interface provides digital control of Yaesu rotators G-800DXA, G-1000DXA, G-2800DXA, and G-5500.

The GS-232B contains its own PIC18C452 microprocessor with ROM and RAM and 10-bit analog-to-digital converter. The 3 wire async serial line can be configured for serial data rates from 1200 to 9600 baud. The unit has a DB-9 male connector for to connection to the RS232C COM port of your computer.

Supplied items include: control cable for the azimuth rotator (5 in to mini DIN), control cable for the Az/EI rotator (dual 5 pin to DIN cable), DC power cable, and hook and loop fasteners. This device requires 12 VDC at 110 mA.

### Rotator Specifications

	Model	Input Voltage	Motor Voltage	Rotation Time	Stationary Torque	Rotation Torque	Maximum Windload	Max. Vert Load	Max. Mast Size	Cable Type	Weight lbs (kg)	HRO Price
M2	OR-2800PX	110/220 VAC	28 VDC	55 sec	17,000 in lbs	3200 in lbs	35 sq ft	1800 lbs	3-1/8 in	8-wire	42 (19)	CALL
Yaesu	G-450A	110 VAC	29-32 VAC	51 sec	217 ft lbs	39.8 ft lbs	10 sq ft	242 lbs	2 in	5-wire	7 (3.2)	CALL
	G-800DXA	110 VAC	24 VDC	55 sec	3456 in lbs	43-79 ft lbs	17 sq ft	440 lbs	2.5 in	6-wire	10 (4.5)	CALL
	G-1000DXA	110 VAC	24 VDC	55 sec	5200 in lbs	79 ft lbs	22 sq ft	440 lbs	2.5 in	6-wire	15 (6.8)	CALL
	G-2800DXA	110 VAC	24 VDC	55 sec	20,832 in lbs	219 ft lbs	34 sq ft	880 lbs	2.5 in	6-wire	26 (11.8)	CALL
	G-5500	110 VAC	24 VAC	58 sec	289 ft-lbs	*	10.7 sq ft	440 lbs	2.5 in	6-wire	20 (9)	CALL
	G-550	110 VAC	24 VDC	67 sec	289 ft-lbs	101 ft-lbs	10.7 sz ft	440 lbs	1-5/8 in	6-wire	7.9 (3.6)	CALL

\* Elevation 101 ft-lbs, Azimuth 44 ft-lbs

*Yaesu's high quality rotators for amateurs include models for medium to large arrays and for satellite work. There are also provisions for computer control. Contact your nearest HRO for more specifications and discount prices on Yaesu products.*

### G-1000DXA

The G-1000DXA is designed to handle bigger arrays up to 22 square feet. A great value.

### G-450A

The G-450A is ideal for smaller HF and VHF/UHF antennas. Features 360 degree radial compass display with overlap.




### G-5500

**HRO Price \$CALL**

This is the most popular azimuth and elevation rotator for satellite, moon-bounce or other space communications work. It provides horizontal and vertical antenna rotation in a single unit. The control box has two large meters, one showing elevation and the other azimuth. Meter aiming accuracy is within  $\pm 4\%$ . The G-5500 provides 180° elevation rotation with a rotation time of 67 seconds. A 360° azimuth rotation takes just 50 seconds. This rotator accepts up to a 2.5" mast, a maximum 1-5/8" horizontal cross-boom and 440 pounds of vertical load. Computer controllable with optional GS-232 computer interface. **HRO Price \$CALL**

### G-550

This is an elevation rotator for satellite work. The control box shows elevation in degrees. **HRO Price \$CALL**

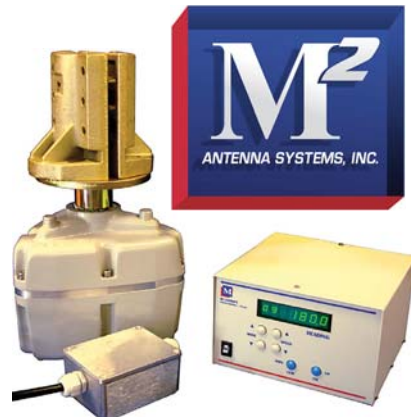

### Orion Rotator OR-2800PX

The Orion OR-2800PX is engineered for long life, reliability and performance while turning large antennas or systems. It has a strong ductile iron mast clamp to support up to 3-1/8" masts (optional long bolts required), extended and hardened drive shaft, and prop-pitch style torque plate. The rotator housing fits inside most popular towers and mates to standard tower / rotator plates.

The RC-2800PX Control Box has digital readout, variable speed control, slow start, and reverse delay, programmability, preset, 2 rotator capacity, coast-down, true AZ readout-continuous and infinite limit position control. The USA-made OR-2800PX has a one year warranty. **HRO Price \$CALL**

Wind Area Capacity .....35 sq. ft.  
Starting Torque .....4200 in. lbs.  
Rotating Torque .....3200 in. lbs.  
Breaking Torque .....17000 in. lbs  
Vert. Load Capacity .....1800 lbs.  
Mast Size (O.D.) .....1.75-3-1/8"  
Rotation Speed (360) .....55-120 sec.  
Readout Accuracy .....1 degree  
Input Voltage.....110/220 AC  
.....50/60 Hz  
Motor Voltage .....28-42 VDC  
Cable Type .....8 conductor  
Weight (Rotator unit) .....42 lbs.



# TUBULAR CRANK-UP TOWERS

## MA-Series Crank-Up Masts

The premier MA-series crank-up Tubular Towers are designed to be both safe and neighbor friendly. The slender design gives a clean, flagpole-like appearance and is rated at 90 mph winds per the IBC 2006 code. Per TIA/EIA specifications, adequate safety margins are included. International Building Code calculations are available for most models.

The MA-40 and 550 models require base kits comprised of a flat base and two ½" x 10" anchor bolts, but come standard with a wall bracket and rotator plate mounted on top of the top section. No guying is required when tower is properly bracketed to the eave of your roof.

MA-series towers are completely self-supporting only when used with accessory MARB or MAB series bases. The MARB series rotator base allows the entire tower and antenna to be rotated from the base (rotator not included). This allows easy rotator maintenance plus

emergency hand rotation of the entire tower and antenna.

The MA-550MDP, 770MDP and 850MDP models include a heavy duty motor drive with positive pull down. The MDP models provide motorized raising and lowering of the tower. A remote control unit (RMC-1000) accessory is available that allows raising and lowering from your ham shack or other remote location.

All models without motor drives come standard with manual hand winches which have load actuated brakes for maximum safety. This feature prevents the winch from free-wheeling and causing injury to you or your installation in the event that you lose your grip during raising or lowering.

All steel used at US Tower conforms to ASTM specifications. All welding is done by certified factory personnel. All of our towers are factory tested by trained personnel before leaving the plant.

Model Number	Height Maximum	Height Minimum	Sections	Weight Pounds	Sec O.D. Top	Sec O.D. Bottom	HRO Price
MA-40	40'	21'6"	2	245	3" sq.	4.5"	CALL
MA-550	55'	22'1"	3	435	3" sq.	6.625"	CALL
MA-550MDP*	55'	22'1"	3	620	3" sq.	6.625"	CALL
MA-770	71'	22'10"	4	645	3" sq.	8.0"	CALL
MA-770MDP*	71'	22'10"	4	830	3" sq.	8.0"	CALL
MA-850	85'	23'6"	5	943	3" sq.	10.0"	CALL
MA-850MDP*	85'	23'6"	5	1130	3" sq.	10.0"	CALL
All Towers will handle 10 sq. ft antenna at 50 MPH winds.							

These towers requires purchase of MCL-100 or RMC-1000

## TMM Series Compact Towers

The TMM series has a minimum retracted height of 11'4" (may vary, depending on rotator used) and a maximum height of 47' including mast. At the tower's retracted height, visual impact is reduced to a minimum and antenna servicing is made easier. Typically the tower and antenna are below the roof line of your home when the tower is fully retracted.

The TMM series towers are lightweight, freestanding crank-up towers that allow up to 20.7 square feet of antenna in 90 mph winds per TIA/EIA specifications. The TMM-433HD allows 31.8 square feet in 90 mph winds. These


lightweight towers should provide many years of trouble free service. All of our towers have a hot dipped galvanized finish inside and out.

The TMM-433SS and 541SS have a 10" top section which will permit the installation of the Yaesu G800 and G1000 rotators inside the top section. Oversized rotators will prevent full retraction of your tower; however, they may be used if full retraction is not required.

All TMM Series towers require base kits comprised of a hinged T-base and anchor bolts, but include load actuated winch, rotator plate, and eight feet of 2" OD x .120" antenna mast.

### COMPACT TMM-SERIES CRANK-UP TOWERS

Model Number	Height Maximum	Height Minimum	Sections	Weight Pounds	Sec O.D. Top	Sec O.D. Bottom	HRO Price
TMM-433SS	33' w/o Mast	12'3"	4	315	10"	18"	CALL
TMM-433HD	33' w/o Mast	12'3"	4	400	12.5"	20 7/8"	CALL
TMM-541SS	41' w/o Mast	13'	5	430	10"	20 7/8"	CALL
Towers handle 18 sq. ft. antenna at 50 MPH winds. TMM-433HD handles 24 sq. ft.							

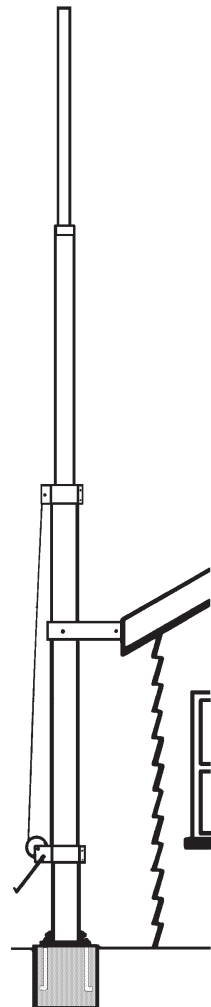

## Crank-Up Tower Base Information

Foundations are designed in accordance with the International Building Code (IBC) for a "non constrained" condition using Class 5 soil. Alternate or custom foundation designs are available for an extra charge. Anchor rods may be ordered from US Tower, however, reinforcing steel and rebar are not provided. Welder's certified IAW AWS D1.1. Contact US Tower for additional information.

Because of wide variations throughout the country in zoning requirements and loading conditions (snow, wind, ice, etc.), it is the responsibility of the customer to make certain that his Tower conforms to all applicable codes. We recommend you obtain all necessary permits prior to purchase.

### The Customer is Responsible

for obtaining all local city or county building and tower permits

#### AND

for taking the tower off the freight truck when it is delivered. Please arrange for adequate help.



# LATTICE CRANK-UP TOWERS

## TX Series Freestanding Towers

US Tower's TX series crank-up towers are as strong or stronger than most competitors' heavy-duty models. The TX towers have 21 foot sections with 4 foot overlap to provide extra height and strength. In addition, the overlap helps prevent binding while lowering your tower in high wind conditions.

The TX series towers have a large enough top section (12 1/2") to permit installation of most rotators inside the section for maximum strength while allowing the section to fully retract. Cross bracing at critical points on the tower ensures safety and additional strength. All crank-up towers have a heavy-duty, hot dipped galvanized finish both inside and out, which should provide many years of trouble free service.

The TX series towers come complete with rotator plate and Fulton hand winch, except MDP and MDPL models, which feature automatic load actuated brakes for maximum safety. Base kits are required, consisting of large steel anchor bolts and heavy-duty steel T-base that allows the tower to hinge on for easy installation. All T-bases will accept the TRX series raising fixtures for easy one-man installation. Other accessories include masts and motor drives. The TX-472MDP comes complete with MDP-750 motor drive with positive pull-down feature. The TX-489MDPL includes the MDPL-1000 motor drive and level wind feature.

US Tower's TX series requires no guying. The wind loading is calculated at 90 mph.

### TX-SERIES FREE-STANDING CRANK-UP TOWERS

Model Number	Height Maximum	Height Minimum	Sections	Weight Pounds	Sec O.D. Top	Sec O.D. Bottom	HRO Price
TX-438	38'	21'9"	2	355	12.5"	15"	CALL
TX-455	55'	22'6"	3	670	12.5"	18"	CALL
TX-472	72'	23'3"	4	1040	12.5"	21 5/8"	CALL
TX-472MDP*	72'	23'3"	4	1210	12.5"	21 5/8"	CALL
TX-489MDPL	89'	24'	5	1800	12.5"	25 5/8"	CALL

All Towers will handle 18 sq. ft. antenna at 50 MPH winds.

\* This tower requires purchase of MCL-100 or RMC-1000

## HDX Series Heavy Duty

US Tower's HDX series heavy-duty crank-up towers have up to 2 1/2 times more windloading capacity than others commonly advertised. This superior strength allows for large stacked arrays, while using our commercial type bases and anchor bolts that can be easily installed and vertically adjusted. All HDX series T-bases are designed to use our TRX series raising fixtures to make installations and antenna servicing a one man job.

US Tower carries many different sizes and strengths of masts to use as accessories with the HDX series towers. The HDX-572MDPL and 589MDPL motorized towers provide dual level wind, positive pull down and heavy duty gear box

features. The HDX-589MDPL comes complete with the MCL-100 limit switch package included. All towers using MDP-750 and MDPL-1000 motor drives must use either the RMC-1000 accessory limit switch package or the MCL-100, which allows the raising and lowering of your tower from the comfort of your ham shack or any remote location.

All HDX series towers come complete with rotator plate, but require base kits consisting of anchor bolts and heavy-duty T-base. US Tower's special T-base design allows the tower to hinge for easy installation. US Tower's crank towers require no guying. The HDX Series towers are rated at 90 mph winds.

### HDX-SERIES HEAVY-DUTY CRANK-UP TOWERS



Model Number	Height Maximum	Height Minimum	Sections	Weight Pounds	Sec O.D. Top	Sec O.D. Bottom	HRO Price
HDX-538	38'	21'9"	2	600	15"	18"	CALL
HDX-555	55'	22'6"	3	870	15"	21 5/8"	CALL
HDX-572MDP*	72'	23'3"	4	1600	15"	25 5/8"	CALL
HDX-589MDPL	89'	24'	5	2440	15"	30 5/8"	CALL
HDX-689MDPL*	89'	24'9"	5	3400	18"	37 1/8"	CALL
HDX-5106MDPL*	106'	25'6"	6	3850	15"	37 1/8"	CALL

All Towers will handle 30 sq. ft. antenna at 50 MPH winds.

HDX-689MDPL rated at 60 sq. ft. of antenna at 50 mph winds.

HDX-5106MDPL rated at 35 sq. ft. of antenna at 50 mph winds.

\*These towers require purchase of MCL-100 or RMC-1000

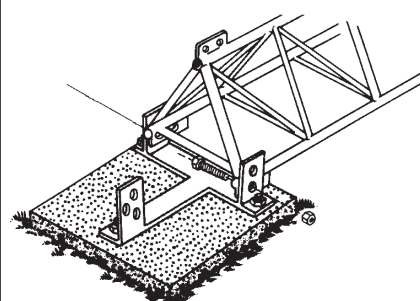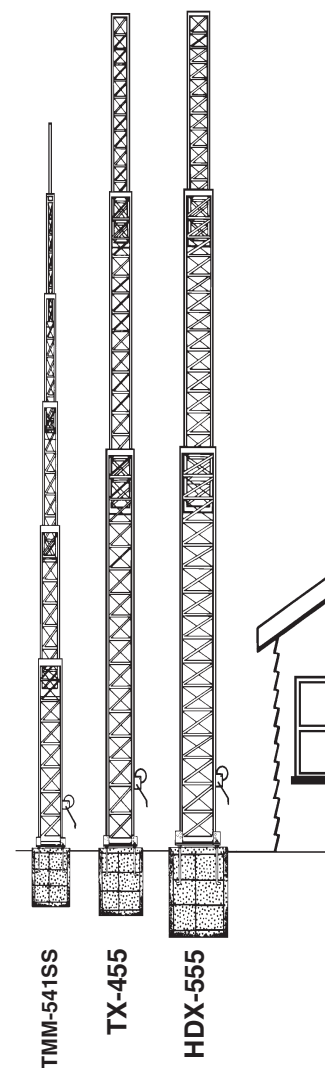

The factory reserves the right to make changes or modifications without notice.

**Call Toll-Free for  
Information and  
Discounts  
on U.S. Towers and  
Accessories**



ALM SERIES

NEW!

# CRANK UP ALUMINUM MASTS

The ALM Series is a patented mast system designed and manufactured by US Tower Corp. The intent of the ALM Series is to provide a versatile and highly capable mast system that can be quickly transitioned for different uses.

Using lightweight aluminum construction, the ALM Series masts can be easily loaded into a vehicle, transported to a field event, and deployed using a number of mobile mast mount options including hitch mounts and drive-on bases.

With its high wind rating, the ALM Series can also be used as a permanent

installed mast attached to a house, an out structure, or installed free-standing. No guying is required for any deployment configuration of the mast.

Whether the intent is to use the ALM Series as a mobile solution, a fixed solution or both, the low maintenance, high strength, weather resistant construction of the mast ensures that you will be prepared at all times with an easy-to-use cost-effective solution.

#### Four heights available:


Height	Rated	Load
16 feet	50 lbs	9 sq feet @ 65 mph
21 feet	50 lbs	9 sq feet @ 65 mph
26 feet	50 lbs	8 sq feet @ 65 mph
31 feet	50 lbs	8 sq feet @ 65 mph

#### Features:


- Lightweight aircraft grade aluminum construction.
- Rapid deployment.
- Corrosion resistant.
- Ideal for temporary or permanent installations.
- Built-in pivot clevis for easy tilt-up.
- Adjustable height winch.
- High-ratio winch.
- High strength-to-weight ratio.
- Low maintenance.
- 4 1/2 ft, 2" O.D. antenna mounting mast with universal rotator mount plate.

#### Options:

- Crank tilt-up raising fixture.
- ALM rotating fixture.
- Antenna mast rotating fixture.
- Hitch mount fixture.
- Wall mount fixture.
- Foundation mount fixture.
- Standalone base.
- Drive-on mast stand.
- Cable Rings
- Motor or hand spindle-driven system.
- Mast rest fixture (for antenna mounting and maintenance).

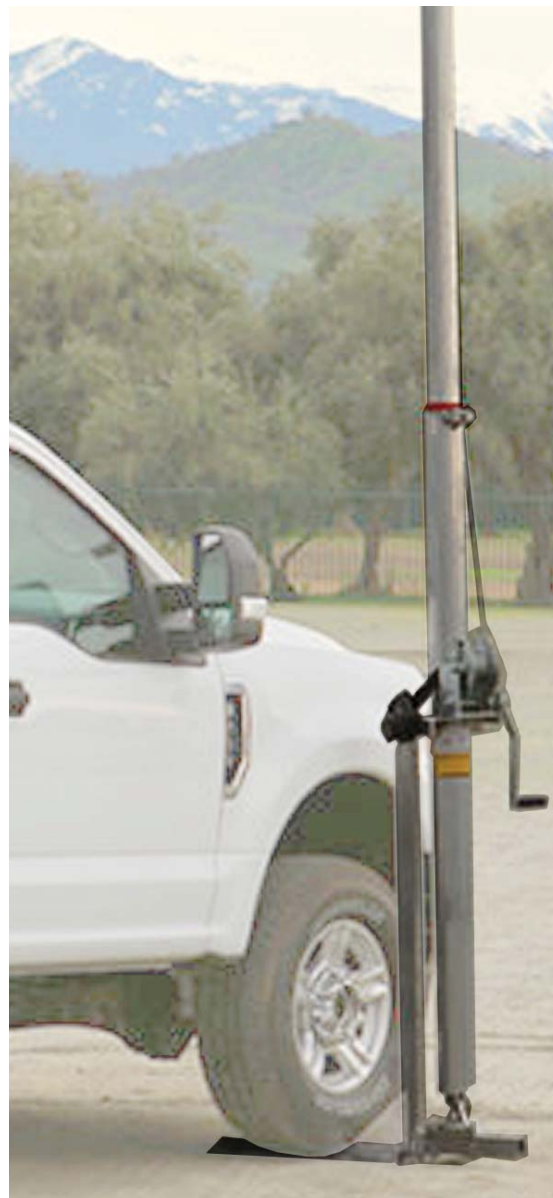

Mast Bracket

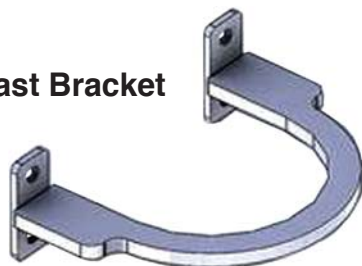

Mast Base





# General Information for Our Valued Customers

## Easy Ordering

Toll-free 800 numbers located throughout the United States are available for orders. This provides personnel at one location or another to answer your questions for extended hours Monday through Saturday. You will find the same low prices at all locations and, thanks to computers, we have the stock levels of all locations available to each salesperson for estimates of availability and delivery.

24 Hour "On-Line" Ordering is now available on the INTERNET! URL is <http://www.hamradio.com>

Shipments are made from any of our locations that has the particular items you need in stock. In most cases, the shipment will be made from the location nearest you (if stock is available). HRO is trying to provide the quickest shipments in the industry using these methods.

California customers can now order using toll-free numbers to speak to their California store of choice.

## Sales Tax

State and local laws require us to collect and remit State sales / use tax on orders shipped from any of our locations INTO Arizona, California, Colorado, Georgia, Texas, Virginia or Wisconsin.

You will find that this small extra charge will be more than overcome by the convenience of the largest ham radio inventories in the United States. You will also find courteous and knowledgeable salespeople to assist you. We think you will find HRO to be the company you want backing you when it comes to dealing with any problems you might have with manufacturers or shipping companies.

## Phone Orders

To place a phone order using a credit card, please have the following information available if you are a first-time caller or have not made a recent purchase from HRO.

We will ask for your callsign (if any), credit card number, expiration date, your home telephone number, and possibly the name, address, and telephone number of the bank listed on your charge card statement.

## Payment

We accept Visa, MasterCard, American Express, Discover Card and PayPal. Personal checks are also accepted; however, processing time may delay shipment by some 10 days.

When using a credit card, please have the card in front of you since we will need all the information, including the name of the issuing bank. If the card holder's BILLING address differs from the shipping address, please be sure to specify both addresses and telephone numbers. For your protection, we thoroughly investigate the validity of all credit card purchases.

## COD Orders

COD payments must be made by cashiers check or money order at the time of delivery. There is a small fee for COD shipments.

## Commercial Sales Purchase Orders

Written purchase orders will be accepted from city, state, and federal agencies, and, with prior approval of credit, from commercial organizations. HRO quotes, in most cases, prices that require payment on receipt of merchandise. You may find a surcharge for credit terms applied to your pricing. Please indicate that you require terms when calling for price quotes.

## Delivery

Free UPS Ground Transportation in the continental US on most items over \$100.

All Alaska and Hawaii shipments can now be shipped by UPS Ground as well as by Blue Label (2nd Day Air) or Red Label (Overnight) or USPS. Please ask for charges.

In a Hurry? If necessary to expedite shipments, UPS has Red Label (overnight), Blue Label (2nd-day) and Orange Label (3 day) services available at an extra cost. Please request charges for these services.

Foreign Deliveries: We ship world-wide. Contact our stores, by fax or email, with your needs. We can give you quotes and details for placing your foreign order. Payment methods include wire transfer direct to our bank as well as payment by VISA/ MC charge cards, PayPal or check drawn in U.S. Funds from a U.S. Bank. Shipments are made (depending on size) by UPS, FED EX, DHL, or international air mail. Some orders to some foreign countries cannot be insured to the full value.

Truck Delivery: On day of delivery by truck, please be sure to have enough help, and / or proper equipment on hand for unloading merchandise. Truck drivers are NOT required to provide assistance. If you are not experienced at handling large, awkward items such as towers, antennas or amplifiers, please ask properly trained people to assist you.

Canadian Orders can now be shipped via UPS. These costs will be added to your invoice.

## Damaged Items

UPS If the item is obviously damaged, note this with the driver and refuse shipment. This item will be returned to HRO and another will be sent at no additional charge. If hidden damage is noted, contact UPS as soon as possible. They will arrange pickup. Once the item is received by HRO, a replacement will be sent.

TRUCK If there is damage or the shipment is short, it is the customer's responsibility to file the claim with the trucking company. At the time of receipt of item, it is recommended that you have the driver write "damaged" or indicate shortage on the bill of lading he gives to you. Be sure to have the same notation as well as drivers signature on his copy also.

MAIL It is the customer's responsibility to file all loss or damage claims with the postal department.

## Prices

Many prices shown are suggested list price. In most cases we offer large discounts. Equipment manufacturers constantly change prices, offer specials or react to the international exchange rates. Simply call one of our 800 numbers and our staff will be happy to quote you the current selling price of the item you are interested in. Prices are subject to change without notice or obligation to the customer. Sorry, we cannot honor typos in this catalog.

## Software

Software is sold on a non-returnable basis. Any software problems will be resolved under the terms of the manufacturer's warranty.

## Lost Items

When your order is delivered, please carefully count items and if anything is missing, notify HRO at once.

Occasionally, cartons shipped at the same time will arrive at their destination two or three days apart.

If you notify HRO within 10 days, we will replace lost or damaged items after completion of proper documentation and acceptance by the shipping agency.

## New Equipment Returns

Products are not sold for evaluation. Under some circumstances (at the discretion of HRO) and with prior approval of the store of purchase, HRO will accept an item for return. Under most circumstances a 15% restocking fee and all freight charges will be assessed.

Your means of refund for returns will be the same as that used for your original payment except for cash, which will be refunded by check. HRO will pay from its corporate offices. It can take up to two weeks.

Defective merchandise may be returned within 10 days of the original purchase for exchange. Original receipt must accompany the return. Contact your salesman for details.

## Manufacturer's New Equipment Warranties

Ham Radio Outlet supports all manufacturer's warranties. Actual warranty terms are included within the shipping container of most items. If needed, you may request from any of our locations a free copy of the manufacturer's written terms for any warranted product. Please request by model number and indicate the page in this catalog that represents the product.

Ham Radio Outlet will in many cases provide in-store repairs; please contact the store of purchase for information. It will be necessary to provide us with the invoice number and purchase date, as most manufacturers need this information to process under their FREE warranty repair terms.

## New Equipment Warranty Returns

When returning equipment for repair, please pack the item in original packing material or something similar to provide adequate protection during the shipping process. Note on box: "ATTENTION SERVICE." Include a copy of your purchase invoice, and a complete and detailed description of the problems. Without the invoice or a complete description, delays will be experienced in providing the proper service and returning the item to you. Be sure to insure the package for its replacement cost.

HRO will repair or replace the defective item at our option. If the item is found to be defective under the terms of the manufacturer's warranty, no charge will be made for service or return shipping within continental USA. It is the customer's responsibility to ship all defective items to the service center for warranty repair.

## HRO Extended Warranty

HRO now offers an optional Extended Warranty Program for most Amateur Radios, which must be purchased within 30 days of the purchase of the related product. The Extended Warranty Program starts at the conclusion of the new product original warranty period, and must be processed by HRO directly via any of our stores. The Extended Warranty Program can be purchased for one (1) or two (2) additional years, does not apply to accessory items, and is available to the original purchaser only and not transferable. See page 54 for details.

## Support

HRO prides itself in its ability to service the customer. If there is a problem please contact the manager of the store from which you purchased the merchandise. If for some reason your problem cannot be remedied by that store manager, please feel free to call Ham Radio Outlet Corporate Headquarters at (925) 933-1771 and explain the situation. At this point our national sales staff will see that your problem is addressed.

**Thank You for choosing HRO**

*The World's Largest Ham Outlet*

# Serving You From Coast to Coast and Around the World

## HAM RADIO OUTLET

WORLDWIDE DISTRIBUTION

**Portland, OR**  
(503) 598-0555  
(800) 765-4267

**Oakland, CA**  
(510) 534-5757  
(877) 892-1745

**Burbank, CA**  
(818) 842-1786  
(877) 892-1748

**Anaheim, CA**  
(714) 533-7373  
(800) 854-6046

**San Diego, CA**  
(858) 560-4900  
(877) 520-9623

**Phoenix, AZ**  
(602) 242-3515  
(800) 559-7388

**Denver, CO**  
(303) 745-7373  
(800) 444-9476

**Plano, TX**  
(972) 424-6219  
(877) 455-8750

**Atlanta, GA**  
(770) 263-0700  
(800) 444-7927

**Milwaukee, WI**  
(414) 358-0333  
(800) 558-0411

**Salem, NH**  
(603) 898-3750  
(800) 444-0047

**New Castle, DE**  
(302) 322-7092  
(800) 644-4476

**Woodbridge, VA**  
(703) 643-1063  
(800) 444-4799

**Order Toll-Free From a Location Near You**  
**Or Take Advantage of Secure 24-Hour Ordering:**

<http://www.hamradio.com>



If your closest 800 number is busy, please call one of our other numbers.

Phone Hours: 9:30 am to 5:30 pm Monday – Saturday

**24-Hour FAX Order Lines at all Store Locations**



### ANAHEIM, CA 92801

933 N. Euclid St.  
Near Disneyland  
(714) 533-7373  
(800) 854-6046  
24 Hour FAX (714) 533-9485  
Email: [anaheim@hamradio.com](mailto:anaheim@hamradio.com)


Janet KL7MF Mgr  
Bill W1HIJ, Ted KB6CUS  
Bob KB6CIA, Phil AD6NH  
Nigel KI6EYP, Ron N6NFA  
Phil WA6LDI  
Fred WOPE  
Wiley KD5EZK



### ATLANTA, GA 30340

6071 Buford Hwy.  
Doraville, 1 mi. north of I-285  
(770) 263-0700  
(800) 444-7927  
24 Hour FAX (770) 263-9548  
Email: [atlanta@hamradio.com](mailto:atlanta@hamradio.com)

Mark KJ4VO Mgr  
David AI4XL, Denise  
James KK4WNX  
Ray WN5FB, Ken KI4BQS,  
Koz KD3GC

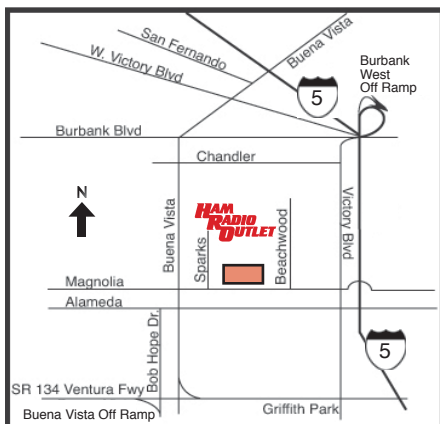


### BURBANK, CA 91506

1525 W. Magnolia  
(818) 842-1786  
(877) 892-1748  
24 Hour FAX (818) 842-5283

Email: [burbank@hamradio.com](mailto:burbank@hamradio.com)

Mark N6MGM Mgr  
Rick K6VE  
Tom KW6C  
Jim N6AJG  
Eric K6EJC  
Gwen K6GRH  
Craig KD6URO

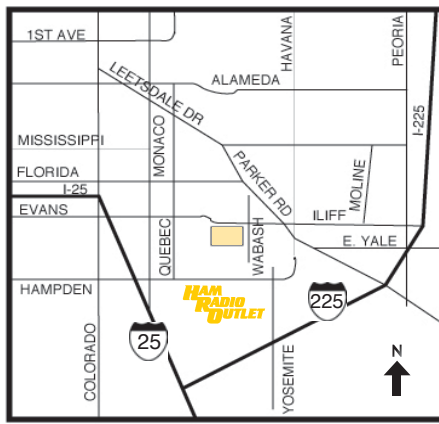

### DENVER, CO 80231

8400 E. ILLIFF Ave. #9  
(303) 745-7373  
(800) 444-9476  
24 Hour FAX (303) 745-7394

Email: [denver@hamradio.com](mailto:denver@hamradio.com)

Clayton K3CRS Mgr  
John W0IG, Kent K0TKM  
Mike KC0SM, Jeff W0QO  
Jim KG0PP, Jay N0MEU  
Robb KC0ZGK  
Eric KC0WOT  
Larry K0LAI  
Kimberly




### MILWAUKEE, WI 53223

5710 W Good Hope Road  
(414) 358-0333  
(800) 558-0411  
24 Hour FAX (414) 358-3337

Email: [milwaukee@hamradio.com](mailto:milwaukee@hamradio.com)


Tom W9TJP Mgr  
Gary KA9YTB  
Stan KD9AU  
Paul W9KHO  
Larry WB9BVB  
Mark KD9EEE  
Rick W19RAH  
Antone, Bill

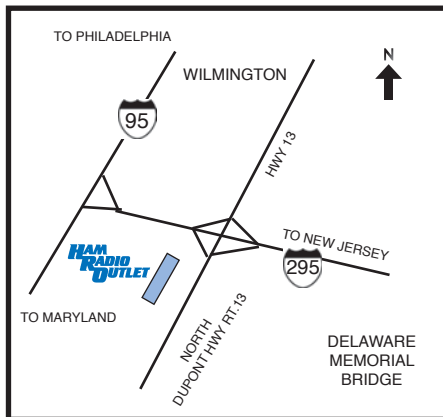

**NEW CASTLE, DE 19720**


1509 North Dupont Hwy, US13  
Parkway Plaza  
(302) 322-7092  
(800) 644-4476  
24 Hour Fax (302) 322-8808  
Email: newcastle@hamradio.com

Ken N2OHD Mgr  
Andrew N3NZS  
Roy WB2EOD  
Ron AC2RF  
John K2AEN  
Larry N0GMF  
Danielle

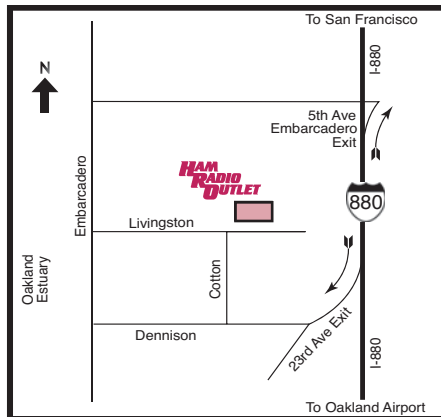**OAKLAND, CA 94606**

2210 Livingston St.  
I-880 at 23rd Ave. Ramp  
(510) 534-5757  
(877) 892-1745  
24 Hour FAX (510) 534-0729  
Email: oakland@hamradio.com


Nick AK6DX Mgr  
David AD6ME  
Ray KE6OGM  
Kevin K6KBQ  
Don KC6IPO  
Krystal

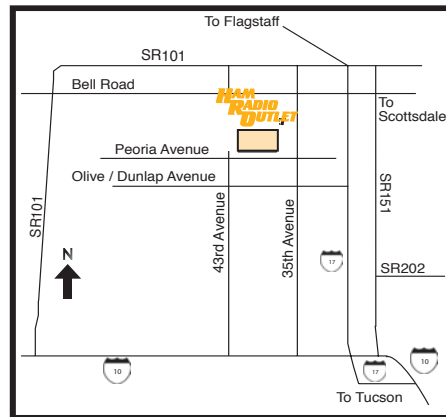**PHOENIX, AZ 85029**

10613 N.43rd Avenue  
(602) 242-3515  
(800) 559-7388  
24 Hour FAX (602) 395-1244


Email: phoenix@hamradio.com

Mike KB6VHF Mgr  
Steve W7QY  
Jim K7EOG  
Mike K7DD  
Laura KB6UHF  
Jim KE7EEU

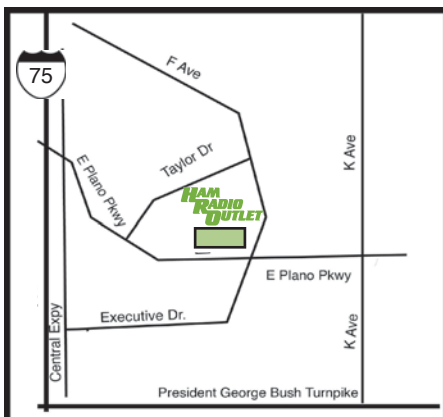**PLANO, TX 75074**


701 E. Plano Parkway  
Suite 406  
(972) 424-6219  
(877) 455-8750  
24 Hour FAX (972) 424-4969  
Email: plano@hamradio.com

Dee N5UIG Mgr  
Eddie KD4RAZ  
Lorraine KD4VSM  
David WA0URJ  
Terry WX5TJW  
Dee N5UIG, Rick W5RAA  
Robert WW9W  
Ken N2VIP, Larry KA5ZWY

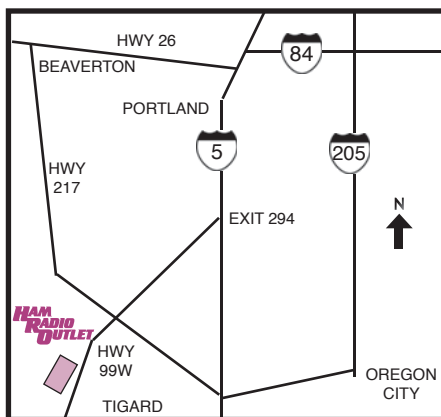**PORTLAND, OR 97224**

14405 S.W. Pacific Hwy (99W)  
(503) 598-0555  
(800) 765-4267  
24 Hour FAX (503) 684-0469  
Email: portland@hamradio.com

Bill K7WCE Mgr  
Eric N7EJP  
Pat W1DUK  
Alexia N7TOY  
Bryan AD7LE  
Ted KE7WRX  
Tony W7FAB, Karen

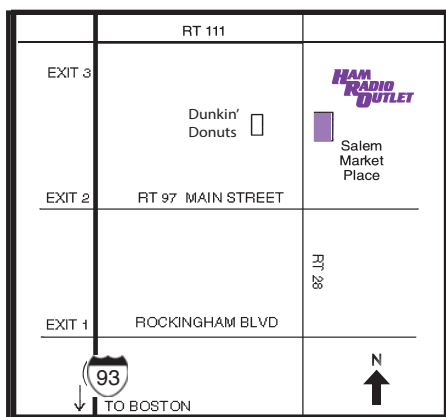**SALEM, NH 03079**

224 N. Broadway D-12  
28 mi. N of Boston, Exit 2, I-93  
(603) 898-3750  
(800) 444-0047  
24 Hour FAX (603) 898-1041  
Email: salem@hamradio.com

Peter K11M Mgr  
Bob N1EUN  
Barry N1DNU, Dave N1IX  
Cal WA1WOK,  
Joe KB1SSA, Dave N1EDU  
Peter W1CBY  
Greg K1GTS  
Steve NA1T, Jesse


**SAN DIEGO, CA 92123**

5375 Kearny Villa Rd. #113  
Hwy. 163 & Clairemont Mesa Blvd.  
(858) 560-4900  
(877) 520-9623  
24 Hour FAX (858) 560-1705  
Email: sandiego@hamradio.com

Joe N6SIX Mgr  
Jerry N5MCJ  
Pete N6RVI  
Bill W6RGS

## 24-Hour FAX Order Numbers

<b>Anaheim</b>	714-533-9485
<b>Atlanta</b>	770-263-9548
<b>Burbank</b>	818-842-5283
<b>Denver</b>	303-745-7394
<b>Milwaukee</b>	414-358-3337
<b>New Castle</b>	302-322-8808
<b>Oakland</b>	510-534-0729
<b>Phoenix</b>	602-395-1244
<b>Plano</b>	972-424-4969
<b>Portland</b>	503-684-0469
<b>Salem</b>	603-898-1041
<b>San Diego</b>	858-560-1705
<b>Woodbridge</b>	703-494-3679

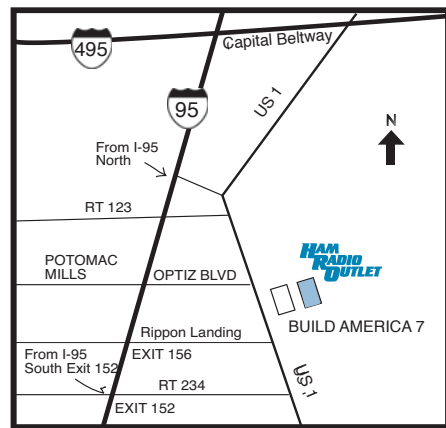**WOODBIDGE, VA 22191**

14803 Build America Drive Bldg B  
Exit 161, I-95 South to US 1  
(703) 643-1063  
(800) 444-4799  
24 Hour FAX (703) 494-3679  
Email: woodbridge@hamradio.com

Steve W4SHG Mgr  
Joe N4JCS  
Bao Fang KK4JFK  
Joe K14OHR  
John KD4REG  
Rick KE4SKX  
Omar KW7OS

# INDEX

## MANUFACTURERS

ABR Industries.....	80
Acom.....	71, 73
Alinco.....	3-5, 75, 78
Alpha Delta.....	25, 88-89, 93
Ameritron.....	71-72
Andrew.....	80-81
AOR.....	5
ARRL Products.....	26, 28-29, 51-54
Artsci.....	51
Astron.....	75
Austin Antennas.....	95
Belden.....	80
Bioenno.....	78
Benchner.....	48
Bongo Ties.....	79
Buckmaster.....	54, 93
Cable Xperts.....	80-81
Callbook.....	54
Chameleon Antenna.....	102
CoaxWrap.....	79
Coax-Seal.....	79
Comet.....	42, 108-110
CQ.....	50-51
Create.....	25
Cushcraft.....	91, 96-99
Daiwa.....	41, 75, 88
Davis Cable.....	80
Davis Weather Stations.....	39
Diamond.....	25, 41, 75, 78, 88, 102-105
Farallon.....	28
Flash & Pass.....	51
Gap Antenna.....	92
Gordon West School / W5YI.....	50
Grundig / Eton.....	26
Ham Radio Deluxe.....	29
Heil Sound.....	36-39
Hustler.....	100-101
HyGain.....	90, 112-114
Icom.....	6-11, 71
JSC.....	80
Kantronics.....	29
Kent.....	48
Kenwood.....	12-14, 75
Larsen.....	95, 106-107
LDG Electronics.....	84-85, 89
Lido.....	49
M <sup>2</sup> .....	115
Maha.....	79
Maldol.....	92, 95
MFJ.....	25, 29, 35, 40, 42, 44-46, 76, 86-87, 91, 94, 111-112
Mirage.....	71
NCG.....	95
Nifty Mini-Manuals.....	27, 49-51
Niljon Antennas.....	95
OCI.....	34
Palstar.....	41, 71, 82
PolyPhaser.....	89
Pryme Radio Products.....	95
RadioWavz Antennas.....	89, 93
Remotiger.....	30
RigExpert.....	43
RT Systems.....	31
Samlex America.....	75, 77
Scanner Master.....	25, 48

SDRplay.....	27
SGC.....	83, 102
Tarheel Antennas.....	95
Tigertronics.....	34
Times Cable.....	80-81
Timewave Technology.....	33
Unadilla.....	89
Uniden.....	24
US Tower.....	116-118
Vibroplex.....	47-48
West Mountain Radio.....	32, 34, 74, 79, 83
Whistler.....	25
Yaesu.....	15-23, 71, 75, 102, 115

## PRODUCTS

Amplifiers.....	19, 71-73, 82
Analyzers.....	42-43, 79, 82
Antenna Tuners.....	7, 82-87
<b>Antennas</b>	
Handheld.....	9, 95, 102-103, 109
HF.....	90-94, 98-103, 108, 110, 112
HF Mobile.....	94-95, 100, 102, 108, 110
On Glass.....	94-95, 107
Portable.....	102, 112
Public Safety.....	107
Repeater.....	100, 108
SWL / Scanner.....	25-26, 103, 106
VHF / UHF.....	92-100, 103, 108, 110
VHF / UHF Mobile.....	94-95, 98-109
Audio Solutions.....	33-35, 39
Baluns / Insulators.....	82, 89, 111
Batteries / Battery Packs.....	8, 14, 21, 78-79
Battery Chargers.....	8, 21, 79
<b>Books, CDs, Magazines</b>	
Amateur.....	28-29, 50-54
SWL / Scanners.....	26-27
<b>Cables</b>	
Audio.....	28
Cloning / Programming.....	8-9, 21, 28, 32
Coax.....	80-81, 110
Packet / Data.....	21, 28
Power.....	8-9
Rotator.....	80
Cases, Radio.....	8-9, 21
Clocks.....	45
Computer / Radio Interface.....	28-34
<b>Computer Software</b>	
Cloning / Programming.....	7, 18-19, 29
Databases.....	54
Logging.....	29
Packet.....	28-29, 32-35
Radio Control.....	7, 29-34
Study aids.....	50, 52
Connectors / Adapters.....	9, 37, 79, 105, 110
Dummy Loads.....	40, 82, 105
Duplexers.....	95, 104, 109, 111
<b>Email</b> .....	<b>sales@hamradio.com</b>
Headsets / Earphones.....	8-9, 21, 35, 38-39
Internet / Radio Interface.....	19, 29-30, 33
<b>Internet</b> .....	<b>http://www.hamradio.com</b>
Keys / Keyers.....	46-48
Lightning / Surge Protectors.....	44, 87-89, 105
Maps / Map Books.....	51-52
Masts.....	92, 101, 111



**Serving You From Coast to Coast  
& Around the World**

**Order Toll-Free  
From a Location Near You**

Western U.S. / Canada  
800-854-6046

Mountain / Central  
800-444-9476

Southeast / Central  
800-444-7927

Mid-Atlantic / Central  
800-444-4799

Northeast 800-644-4476

New England / Eastern Canada  
800-444-0047

**If Your Closest 800 Number Is Busy,  
Please Call One of our Other Numbers.**

**24-Hour FAX Order Lines:**  
**See pages 41, 120 and 121**

### Microphones (see also Headsets)

Desk.....	15, 35-36
Hand / lapel.....	21, 39
Morse Code Readers / Practice.....	46, 50

### Mounts / Brackets

Equipment.....	37, 48-49, 77
Mobile Antennas.....	101, 105-106, 110-111
Noise / Bandpass Filters.....	33-35
Owl.....	93
Packet / Pactor / TNC / Digital.....	28-29, 32-33, 35
Power Panels / Outlet Strips.....	44, 74
Power Supplies.....	19, 75-78
Radio Control.....	29-34

### Radios, Amateur

Base.....	3, 6-7, 10, 12-13, 15-18
Handheld.....	5, 8-9, 11, 14, 22-23
Mobile.....	4, 8, 10, 12-13, 17-21

### Radios, Specialty

Commercial.....	5
Emergency.....	26
Scanners.....	24-25
Short Wave Listening.....	3, 9, 26
Software Defined.....	27
Rotators.....	112-115
Solar Power.....	77
Speaker Mikes.....	8, 21
Speakers.....	20, 34-35, 82
Store Locations.....	120-121
Study Aids.....	46, 50-52
Switches, Antenna.....	87-89, 105
SWR / Watt Meters.....	40-41, 82, 85
Towers.....	116-118
Weather Stations.....	39
<b>Worldwide Web</b> .....	<b>http://www.hamradio.com</b>



# FT2DR

144/430 MHz DUAL BAND DIGITAL TRANSCEIVER

## Advanced C4FM Technology Opens up New Vistas for Amateur Radio

- C4FM Digital with FM Friendly AMS
- Advanced Touch Panel Operation
- Huge 1.7" × 1.7" Full-dot Matrix Display
- Snapshot Image Display
- Simultaneous C4FM/C4FM standby
- New Digital Features



**C4FM**  
DIGITAL CLEAR VOICE  
Clear and Crisp Voice Technology

**AMS**  
Automatic Mode Select

**WIRES-X**

**YAESU**  
The radio

YAESU USA  
6125 Phyllis Drive, Cypress,  
CA 90630 (714) 827-7600

For latest Yaesu news, visit us on the Internet: <http://www.yaesu.com>

Specifications subject to change without notice. Some accessories and/or options may be standard in certain areas. Frequency coverage may differ in some countries. Check with your local Yaesu Dealer for specific details.



HAM RADIO OUTLET  
933 N. EUCLID ST.  
ANAHEIM, CA 92801

PRESORTED  
STANDARD  
US POSTAGE  
PAID  
BOLINGBROOK, IL  
PERMIT #2313

## NEW COMPACT HF TRANSCEIVER WITH IF DSP

A superb, compact HF/50 MHz radio with state-of-the-art IF DSP technology, configured to provide YAESU World-Class Performance in an easy to operate package. New licensees, casual operators, DX chasers, contesters, portable/field enthusiasts, and emergency service providers- Yaesu FT-450D... This Radio is for YOU! And it's available at HRO.



Compact size: 9" X 3.3" X 8.8" and Light weight: 7.9 lb

HF/50 MHz 100 W All Mode Transceiver

# FT-450D

With Built-in Automatic Antenna Tuner

- NEW** Illuminated Key buttons
- NEW** Classically Designed Main Dial and Knobs
- NEW** 300 Hz/500 Hz 2.4 kHz CW IF Filters
- NEW** Dynamic Microphone MH-31 A&J Included



- Large informative Front Panel Display, convenient Control knobs and Switches
- The IF DSP guarantees quiet and enjoyable high performance HF/50 MHz operation

For the latest Yaesu news, visit us on the Internet:  
<http://www.yaesu.com>

Specifications subject to change without notice. Some accessories and/or options may be standard in certain areas. Frequency coverage may differ in some countries. Check with your local Yaesu Dealer for specific details.

■ The rugged FT-450D aluminum die-cast chassis, with its quiet, thermostatically controlled cooling fan provides a solid foundation for the power amplifier during long hours of field or home contesting use.



MOS FET RD100HHF1

## YAESU

The radio

YAESU USA  
6125 Phyllis Drive,  
Cypress, CA 90630 (714) 827-7600